


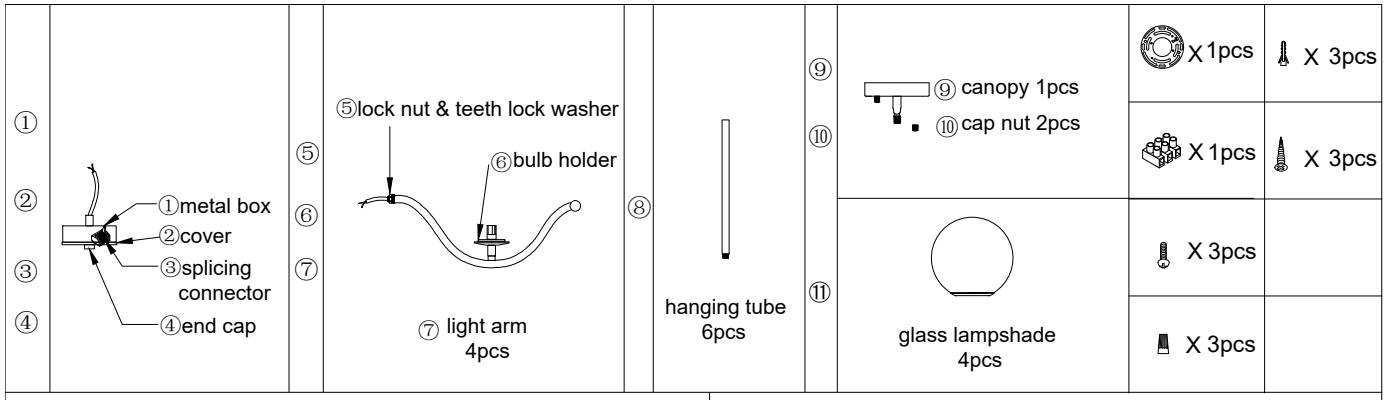


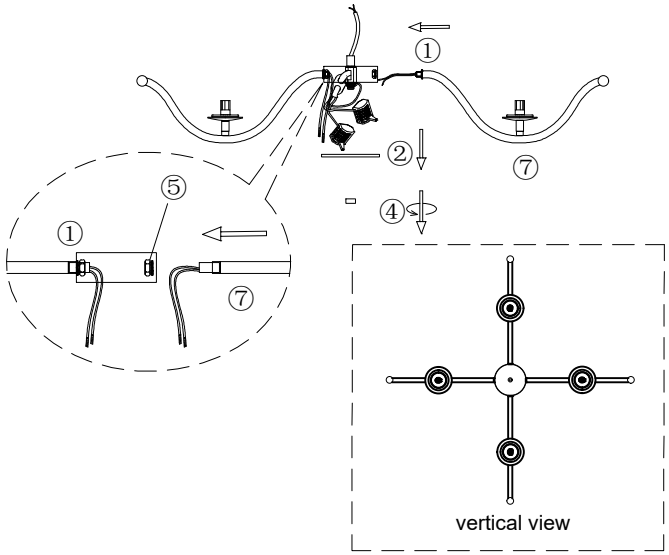


1.Loosen to remove out the lock nut & teeth lock wahser ⑤ from light arm ⑦.
2.Install the light arm ⑦ to the metal box ① with lock nut & teeth lock washer ⑤.

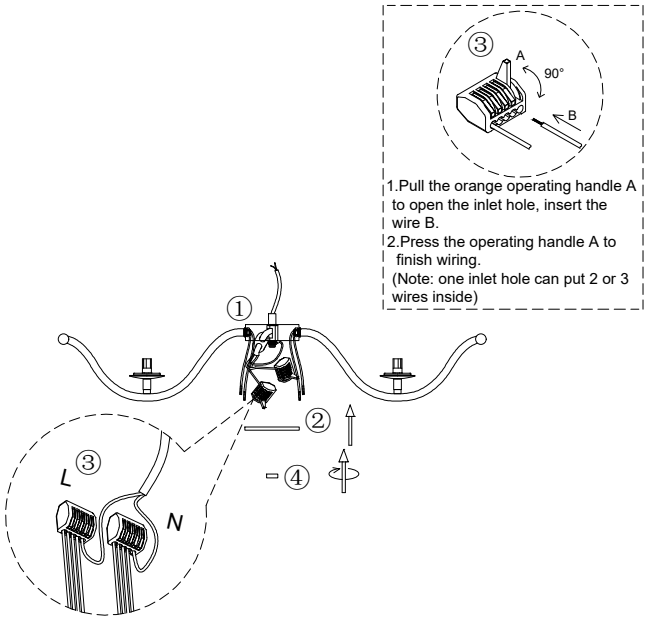

3.Connect all the wires by parallel with connectors ③（all live line-L use one connector, and neutral Line-N use another connector).
4.Close the bottom cover ② to the metal box① with end cap ④.

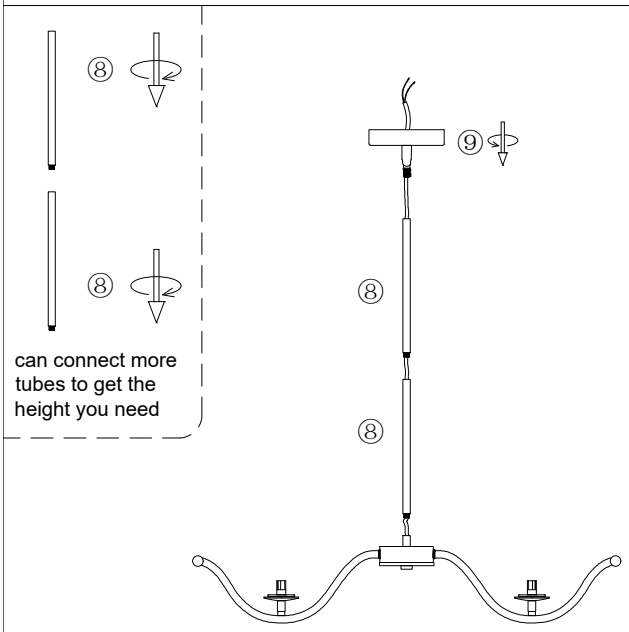

5.Let the wire go through the hanging tube ⑧ and canopy ⑨, rotate to install both to the fixture.

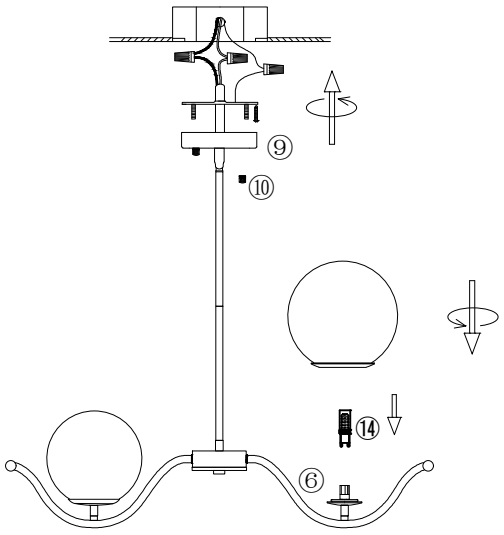

6.Install the bracket to the ceiling junction box with screw .
7.Connect the wire to your home line with cap connector .
8.Install the fixture to the bracket with cap nut ⑩.
9.Install the G9 bulb ⑭, and rotate to install the lampshade to the bulb holder ⑥.

D7055-4
Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !