



Leaders in Reception Seating

Lesro Industries, Inc.
1 Griffin Road South
Bloomfield, CT
06002

Phone 860.243.3226
Fax 860.243.5392
www.lesro.com

Assembly Tips and Troubleshooting


For Amherst, Ashford, Chelsea, Classic, Contour, Franklin, Hartford, Lenox, Madison, Tempe, and Weston Series

This chair is held together with interlocking wedge hardware.

Occasionally the wedge hardware will be misaligned or not fully engaged during assembly. This can lead to a variety of problems including loose cushions; feet not level on the floor; and overall product instability. Below are some tips for assembling your chair correctly and for troubleshooting problems should they arise.

Assembly Tips

1. The interlocking wedges are designed to slide together, as shown in figure 1.
2. Make sure that the wedges on the frames slide inside the wedges on the cushions, as shown in figure 2. They should not be offset, as shown in figure 3.
3. Get both wedges started just a bit before sliding the cushion into place.
4. Slide both sides of the cushion down simultaneously, a little bit at a time. If one side is pushed down too far at once, the wedges will jam. If this happens, dislodge the jammed wedge by tapping it gently back out until it frees up.
5. Don't fully engage the wedges until all the cushions - seats and backs - are attached and the chair(s) are set upright on a level surface. Leave all wedges about $\frac{1}{2}$ " to 1" short of full engagement during the assembly process, as shown in figure 4.
6. Figures 5 and 6 show fully engaged wedges. Double check that all wedges are fully engaged before using your seating.

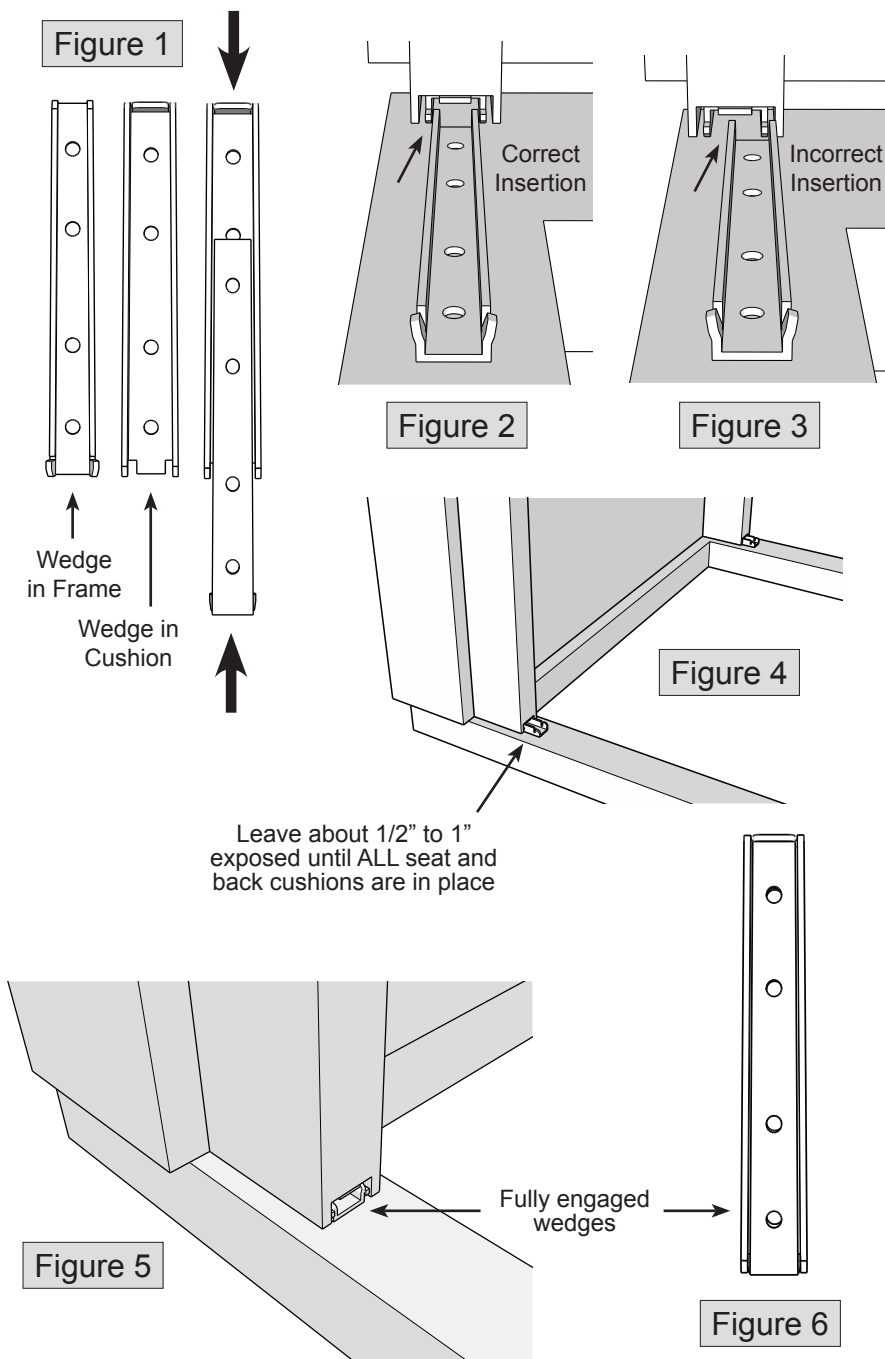

Thank you for purchasing a Lesro product.
Need assistance with assembly? Call Lesro customer service 1-800-275-7545.
Visit us on-line at www.lesro.com