

# VANITY STOOL

Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required. This product is designed for residential use only.

### HARDWARE LIST

- A (14) 1/4" x 5/8" Allen Bolts
- B (2) 1/4" x 1" Allen Bolts
- C (16)  $\Phi 13*\Phi 6.2*1\text{mm}(1/4\text{'})$  Flat Washers
- D (16)  $\Phi 9*\Phi 7*1\text{mm}(1/4\text{'})$  Spring Washers
- E (1) 1/4" Allen Wrench

### PARTS LIST

- G (1) Stool Back
- H (1) Stool Base
- I (4) Legs
- J (1) Cross Frame






PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	14		B	2	
C	16		D	16	
E	1				

FIGURE 3

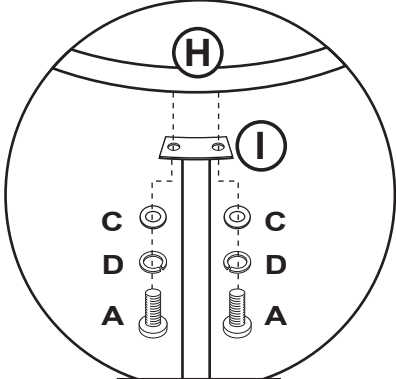
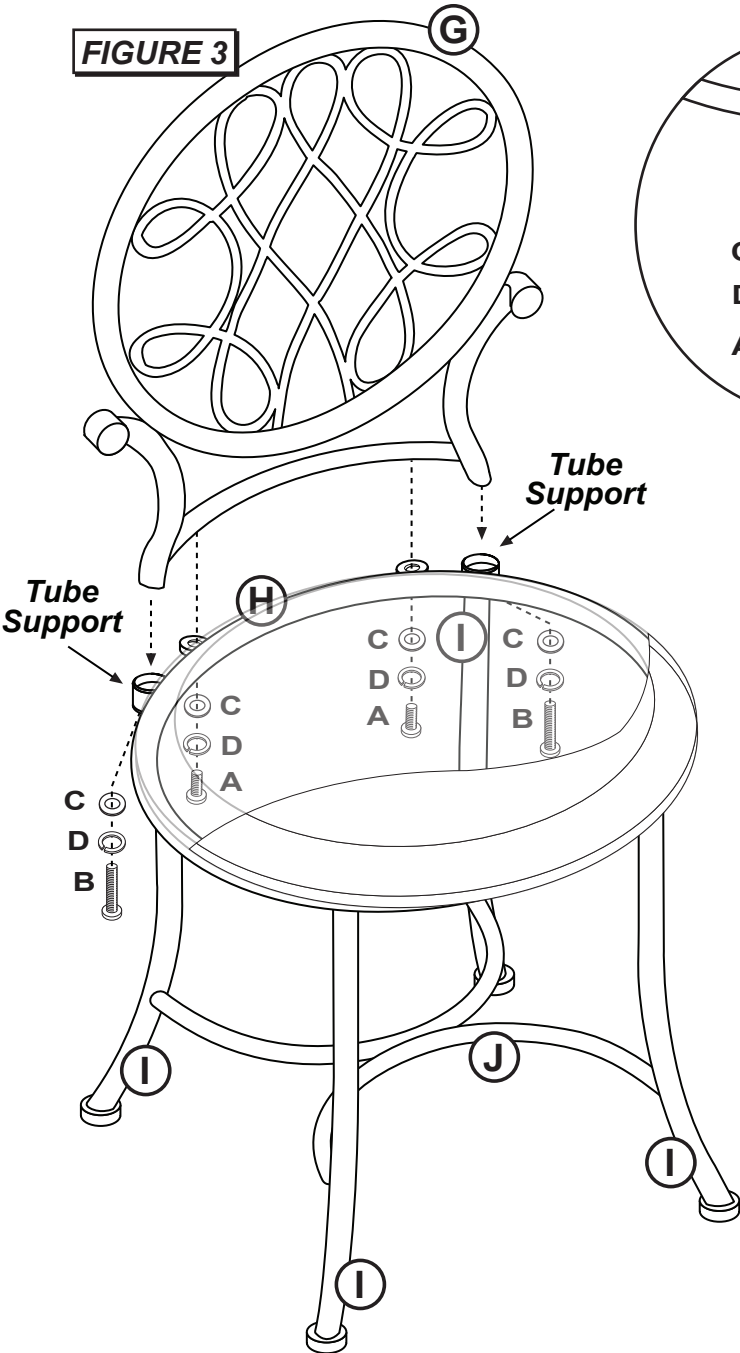


FIGURE 1

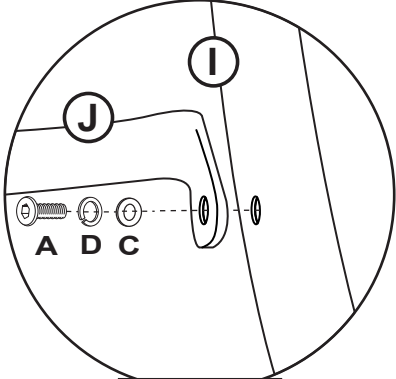


FIGURE 2

### STEP 1

Begin assembly by first attaching each Leg (I) to Stool Base (H) using 2 Allen Bolts (A), 2 Spring Washers (D) & 2 Flat Washers (C) per each leg. See **Figure 1**.

### STEP 2

Attach the Cross Frame (J) to each Leg (I) using 1 Allen Bolt (A), 1 Spring Washer (D), 1 Flat Washer (C) per each leg. See **Figure 2**. Tighten all bolts from **Figures 1 & 2**.

### STEP 3

Attach Stool Back (G), by inserting into tube supports located on back of Stool Base (H), then use 1 Allen Bolt (B), 1 Spring Washer (D) & 1 Flat Washer (C) per each end, Tighten all bolts. See **Figure 3**.

### STEP 4

Attach Stool Back (G) to Stool Base (H), using 2 Allen Bolts (A), 2 Spring Washers (D) & 2 Flat Washers (C) to hold tight. Tighten all screws. See **Figure 3**.

**CARE & MAINTENANCE:** The touch of a soft cloth is all the maintenance the finish will ever need. Please do not use harsh or abrasive cleaners for polishing, as they may cause damage to the finish. Periodic checks are recommended to make sure that all bolts, screws and nuts are securely tightened.