


Assembly instructions Ninja line

😊 Keep this manual for future reference

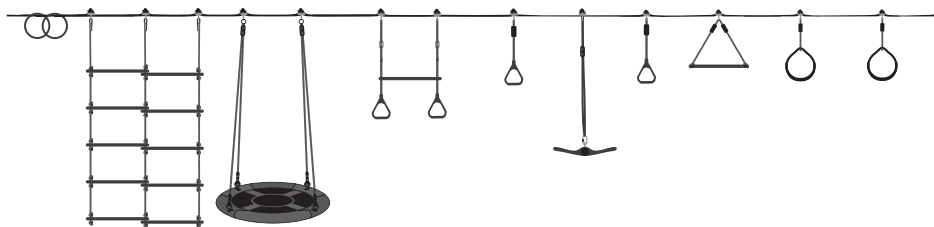

SAFETY INSTRUCTIONS


- This product is not intended for public use. ONLY intended for domestic use.
- Not suitable for children below 5 years of age.
- Do not exceed maximum weight 250 LBS.
- Since children have different development patterns, we suggest that adult supervision be required.
- Inspect the strap before each use. Do not use when there is any abrasions, cuts, tears, burns, sew pattern damaged or alterations. If the strap is showing signs of wear, do not use, replace as necessary.

PARTS LIST

A 2in*65ft Ninja line x1



B Ratchet for Ninja line x1



C Rope ladder x1



D Monkey bar x1



E Triangle gymnastic ring x2



F Round gymnastic ring x2



G Trapeze Swing x1




H Ninja-Twister x1




I Swing seat x1



J Tube with foam x4




K Suspension Rope x2,
Screw and Spacer x4



L Spanner x1



M toggle clasp x13



N Triangle carabiner x13



O Tree protector x2



P Carrying bag x1




Q Free style ring x2



HOW TO FIGURE OUT SETUP DISTANCE


Combined circumference of two trees + Distance between trees +
3ft (for tighten the ratchet) $\leq$ 65ft

*65ft line $\neq$ 65ft trees distance

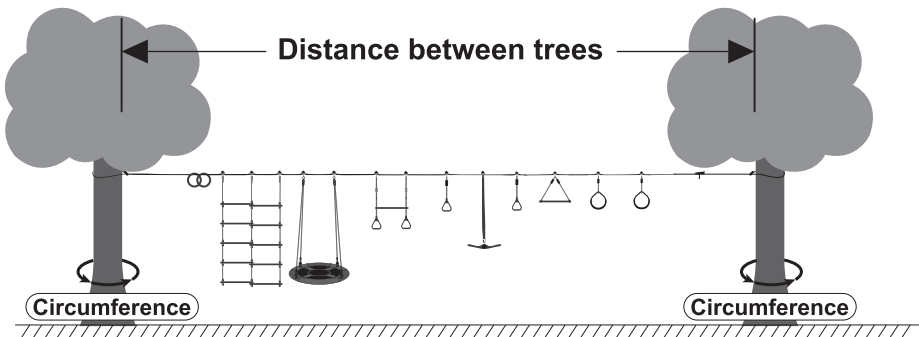


ASSEMBLY INSTRUCTIONS


1. Choose two suitable trees, Wrap the cushion around the tree, fasten it, then set the Ninjaline height to around '12" above the users highest reach.

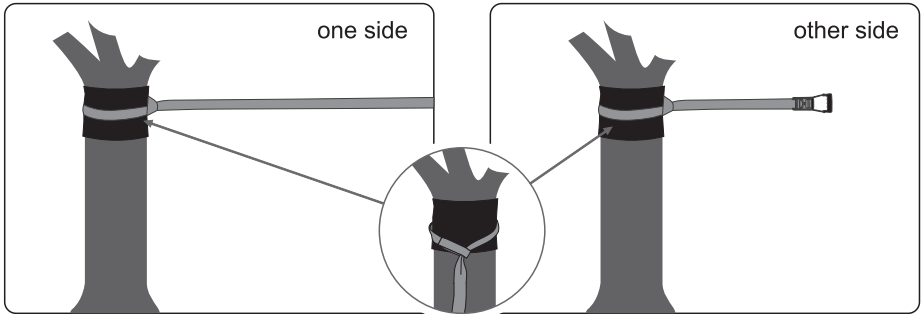

2. Attached the toggle clasp to the strap as following.


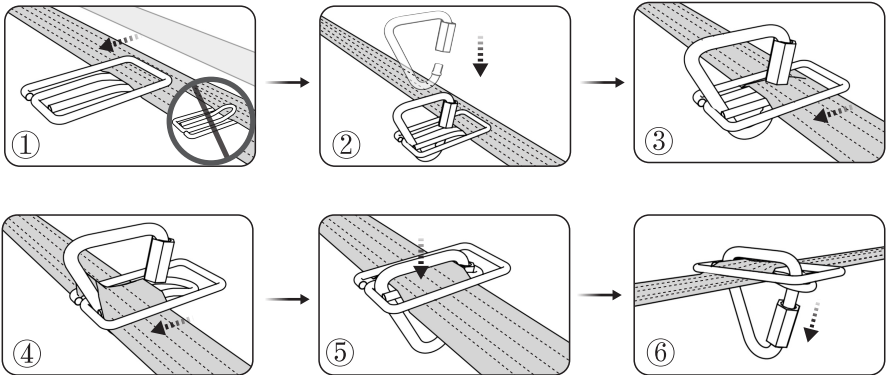


3. Use the same method to install the other 12 toggle clasp. It is recommended that the distance between each triangle clip is 16in.

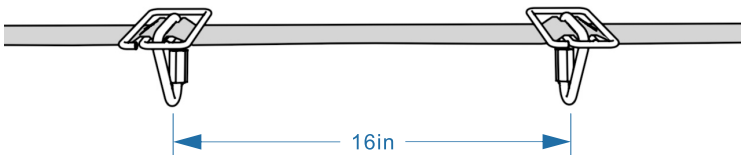


Note: you can measure the distance by the monkey bar


4. Thread the end of the ninja line (2in * 65ft) through the slotted spool from bottom and straighten the line.

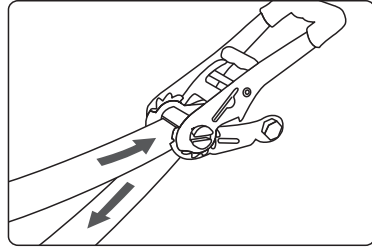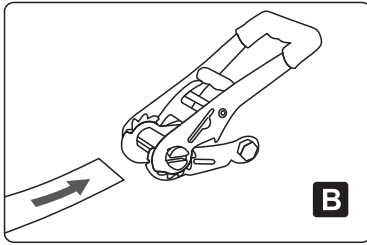



5. Pull the ratchet handle up and down until the line is tight, then close and lock the ratchet handle.

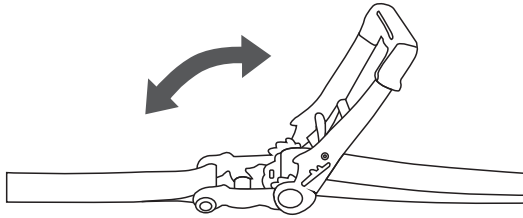


6. Ratchet teeth can damage the line. Keep the line and ratchet straight while cranking and do not over fill the ratchet with the line.

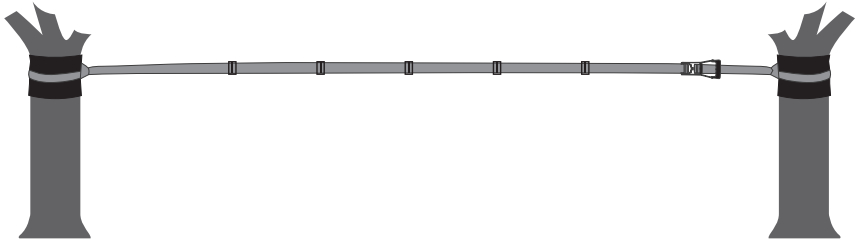

7. Attached the obstacles into the triangle carabiner, and secure the threaded lock nuts.

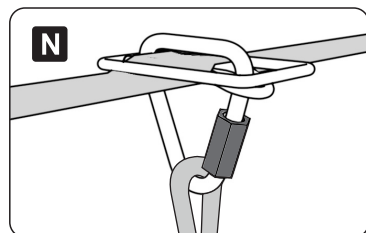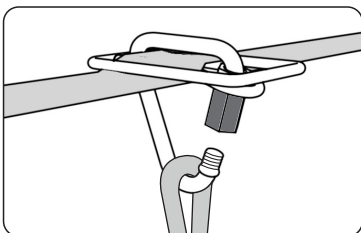


8. It is recommended to install the rope ladder on the left or right, as shown in the picture.

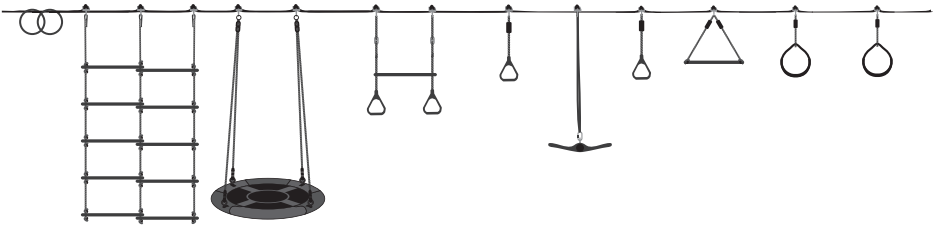


SWING ASSEMBLY INSTRUCTIONS

Tips: The actual color refers to the item you purchased.

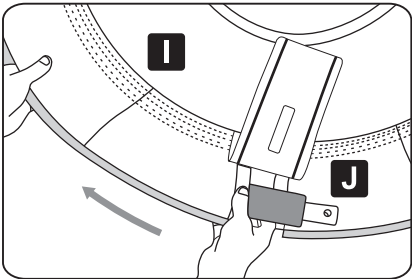


Step 1: Insert 4 tubes into the swing seat.
(Attention: A bigger tube end is matched with a smaller one. If they are in the same size, it is unable to connect them.)

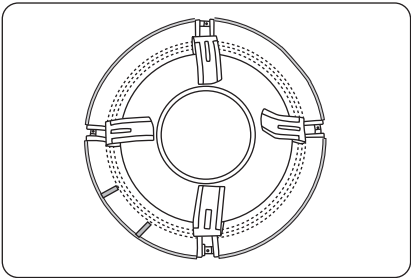


Step 2: Joint random tow adjacent tubes.



Joint other two adjacent tubes then you will get two semi-circle tubes.

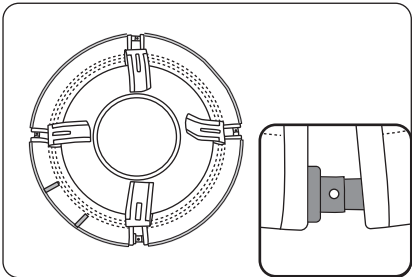

Step 3: Connect left two joint and you will get a round swing seat.

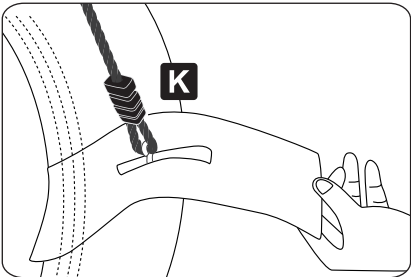

Step 4: Cover it up with Hook & loop then insert the bolt into the hole at the joint.

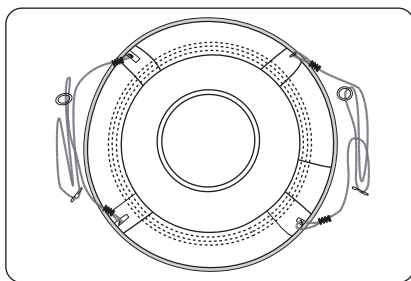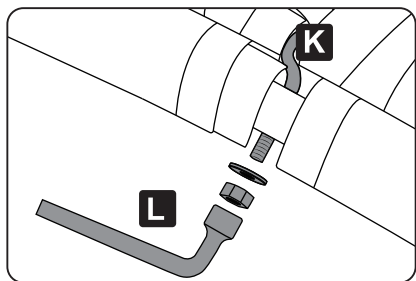


Step 5: Put the washer and nut onto the bolt, and tighten with a wrench until 3-4 threads of bolts are exposed, then put the nut cap onto the bolt and tighten it. Please make sure all the screws are tightened for your safety. (You need an open-end wrench to fasten nut and nut cap.)

Assembly complete.

RELEASE THE LINE

1. Unlock the ratchet by pulling out the release lever firmly.

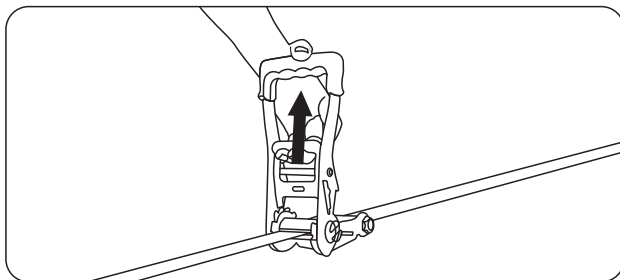

2. While holding the release lever in horizontal line, pull the ratchet all the way open until it is released, then pull the line out from the straightened end.

