



Assembly Instructions

Note: Please help to read my instruction before you ready to assemble.

LOVESEAT CHAISE LOUNGE

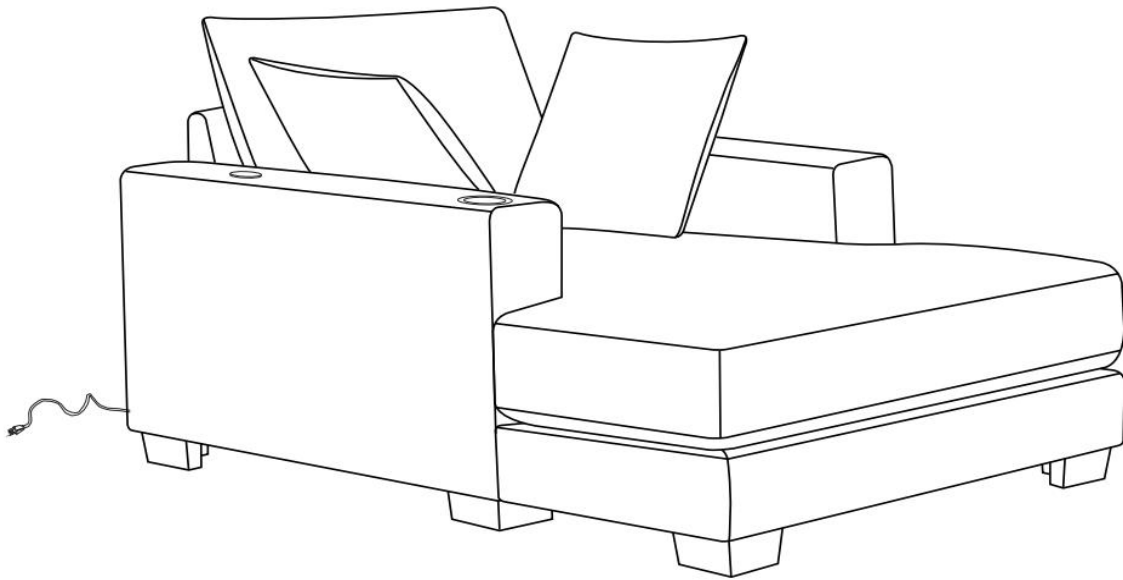

Part List


Label	Picture	Description	QTY
A		Left Armrest	1
B		Right Armrest	1
C		Backrest	1
D		Front Seat Panel	1
E		Back Seat Panel	1
F		Seat Cushion (Package)	1
G		Back Cushion	1
H		Pillow	2
I		Front Rail	1
J		Rail	2
K		Leg	6
L		Middle Leg	1

Hardware List

Label	Picture	Description	QTY
①		Flat Washer	14
②		Spring Washer	12
③		Bolt (M6*50MM)	12
④		Allen Wrench(S4)	1
⑤		Allen Wrench(S5)	1
⑥		Bolt (M6*25MM)	2

Assembly Preparation

Before
Beginning
Assembly:

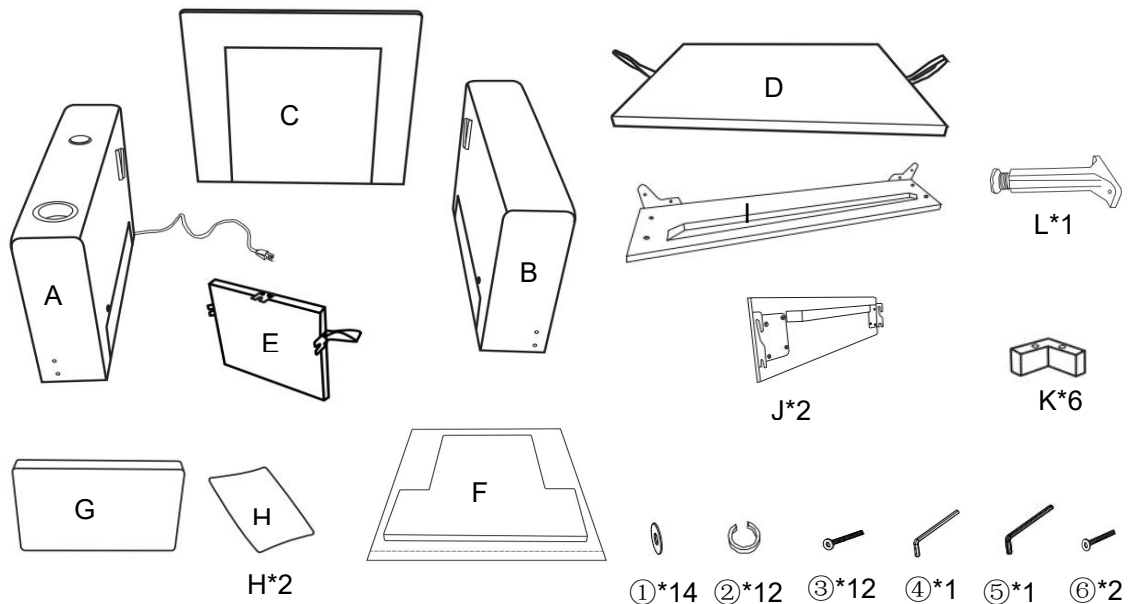

- Read instructions, cover to cover-



- Have 2 adults on hand for assembly-



- Do not assemble on flooring or carpet-




- Assemble on a clean non-marring surface (packing foam)-



- Save all packaging until finished-


Assembly Steps

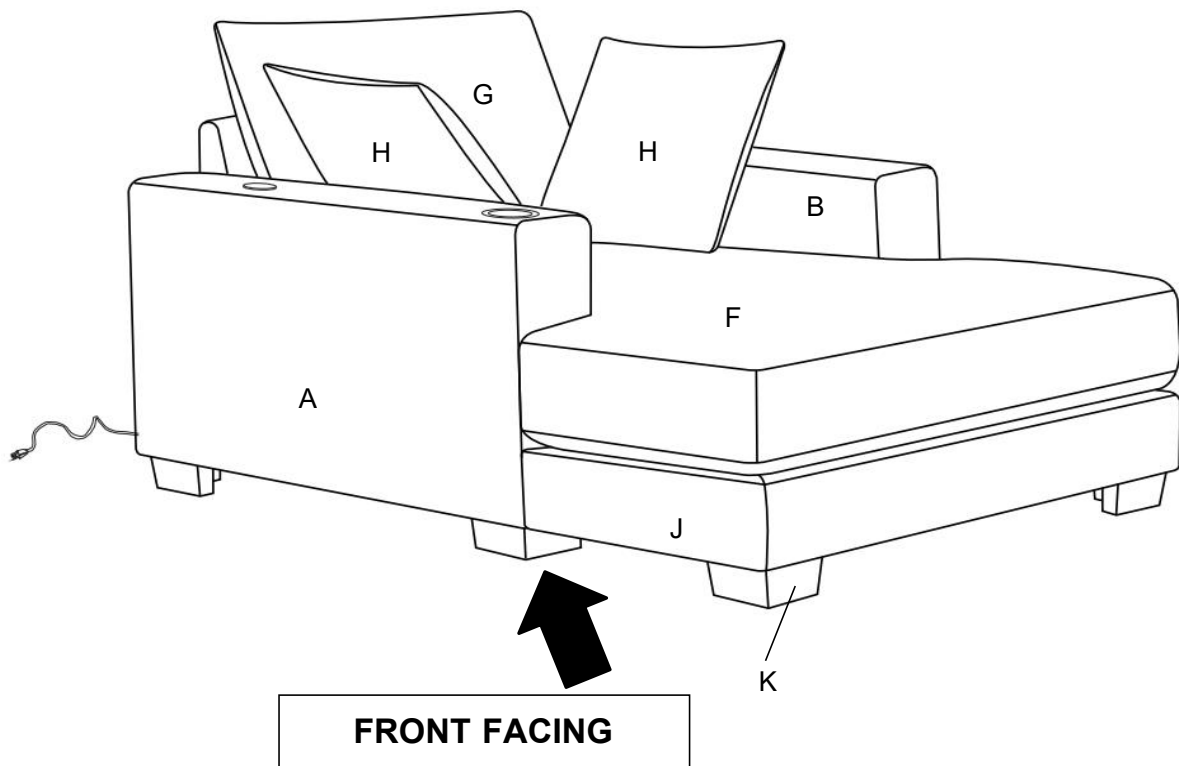

This Chaise Lounge has multiple parts and may require up to 60 minutes to assemble. To give you an overview of the Chaise Lounge parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.


Note: It is recommended that you have an adult partner to assist during the entire assembly process.

Step 1

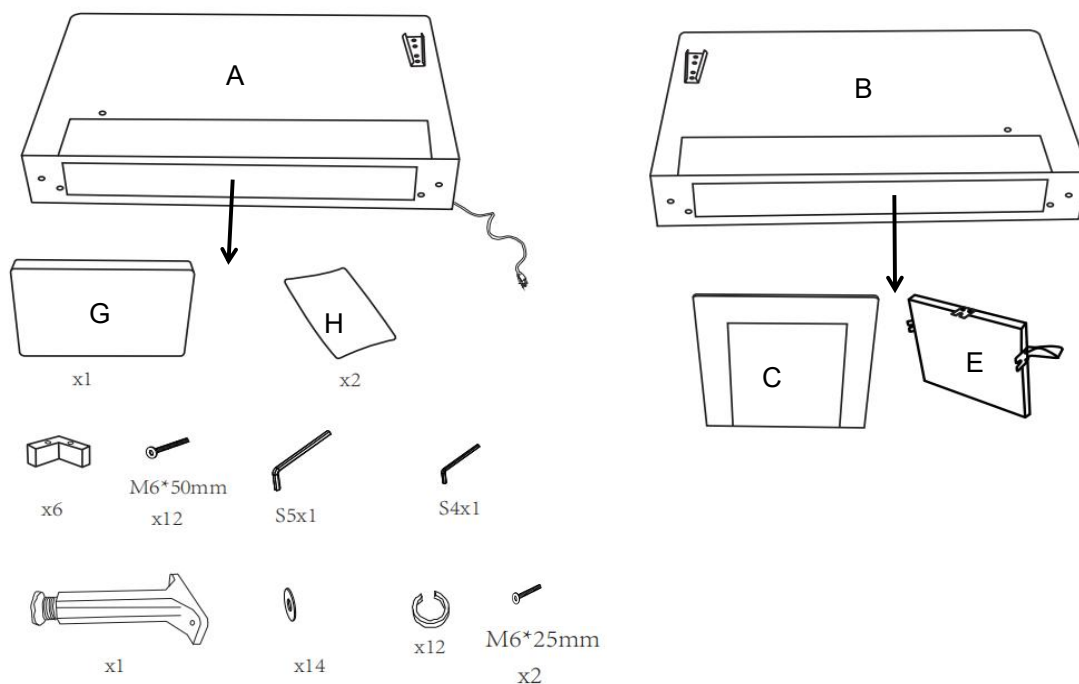


Pull open the Left Armrest(A) and Right Armrest(B),take out the Legs(K and L) and Back Cushion (G) and two pillows(H) and backrest(C) and Back Seat Panel(E) and Hardware Pack.

Step 2

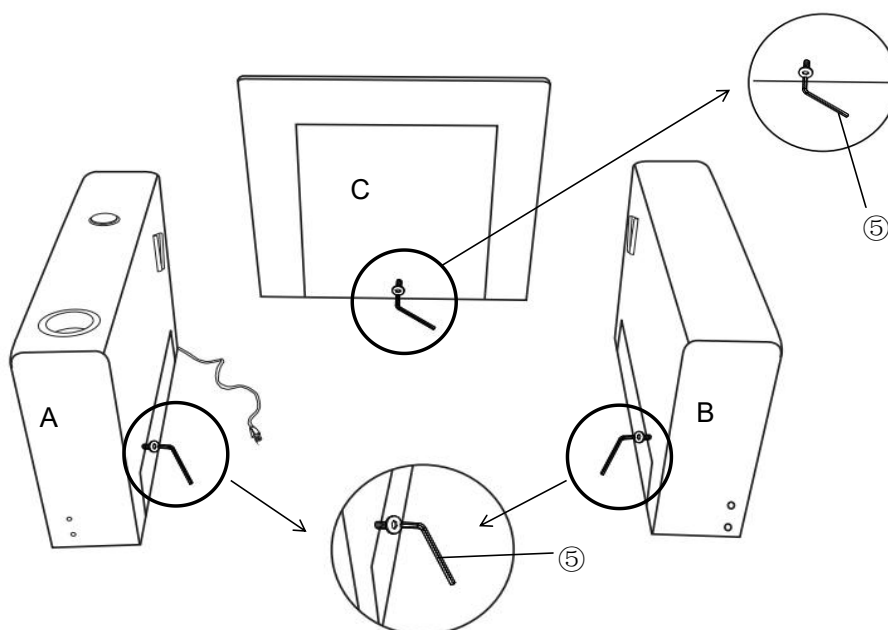


Loose the bolt in Left Armrest(A), Backrest(C) , Right Armrest(B) around half inch by Allen Wrench (⑤) as shown above.

Step 3

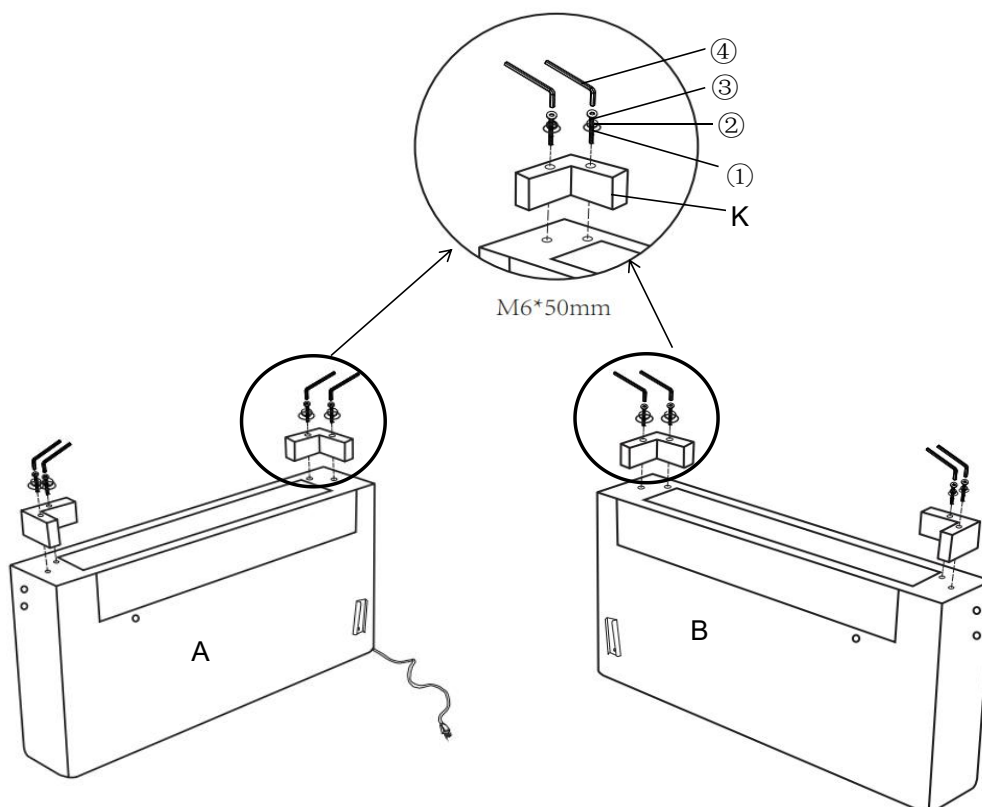


Install the Leg(K) on the Left Armrest(A) and Right Armrest(B) using Bolt (③) and Spring Washer(②) and Flat Washer(①) with the Allen Wrench(④), turning clockwise until tightened. Repeat the same steps to install remaining Legs(K).

Step 4

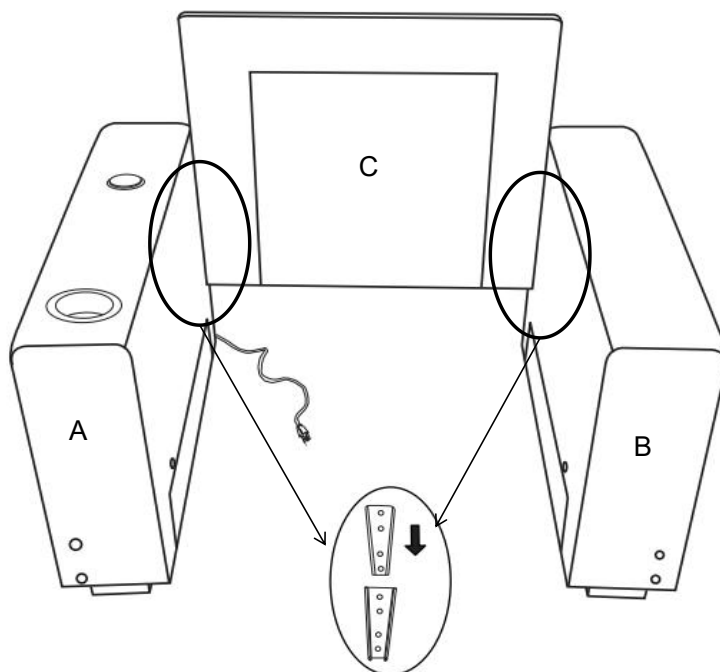


Slide the Tapered Connectors on the Backrest(C) into the Tapered Connectors on the Left Armrest(A) until locked as shown in the picture. Repeat the same process with the Right Armrest(B). This step needs two persons to finish.

Step 5

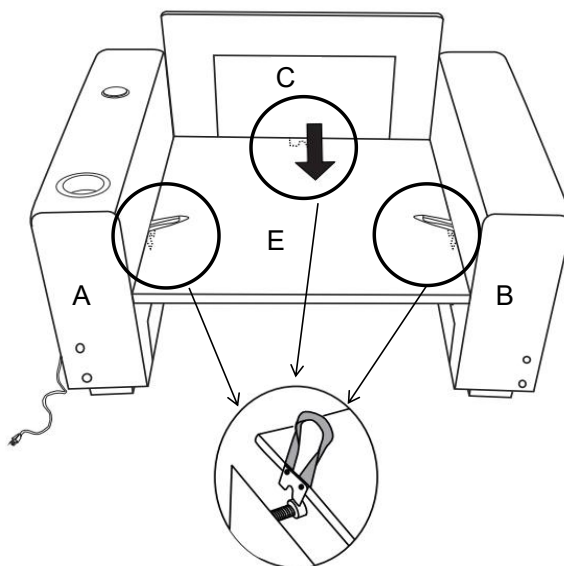


With the assistance of your partner, lift the rope on the two sides of the Back Seat Panel (E), put it down between Left Armrest(A) and Right Armrest(B) then make all u-shaped iron sheet stuck bolts as shown.

Step 6

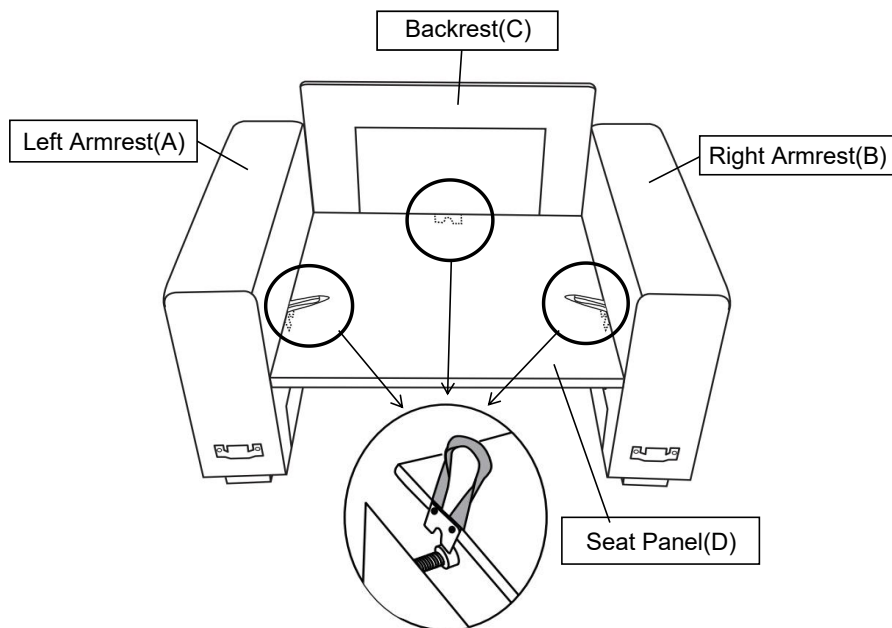


With the assistance of your partner, lift the rope on the two sides of the Seat Panel (D), put it down between Left Armrest(A) and Right Armrest(B) then make all u-shaped iron sheet stuck bolts as shown.

Step 7

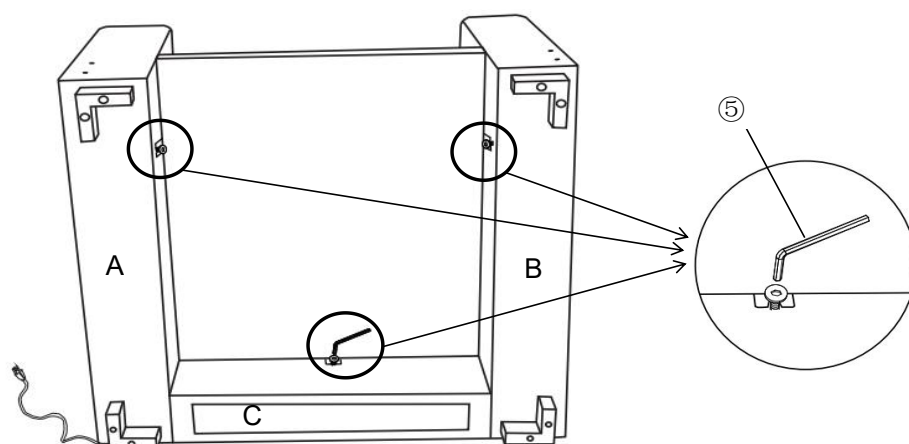


Tighten the Bolts in the bottom of Left Armrest(A) ,Right Armrest(B) and Backrest(C) by Allen Wrench(⑤) as pictured.
Tighten the Bolts fully in a sequential manner.

Step 8

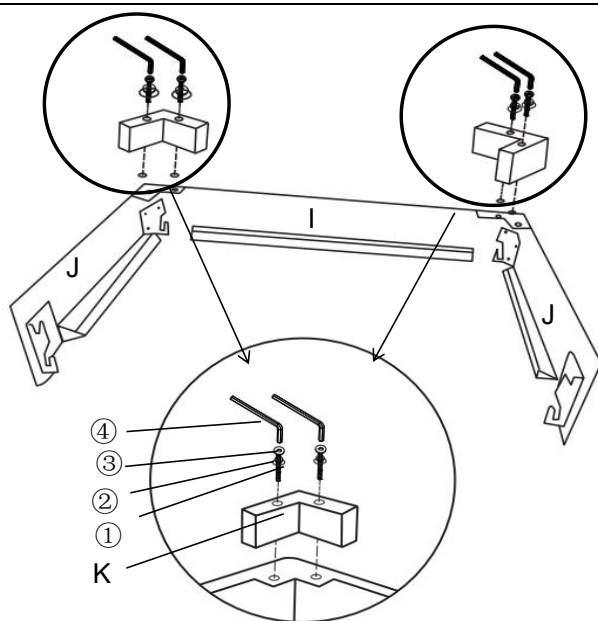


Install the Leg(K) on the Front Rail(I) and two Rails(J),by using Bolt (③)and Spring Washer(②) and Flat Washer(①) with the Allen Wrench(④),turning clockwise until tightened.

Step 9

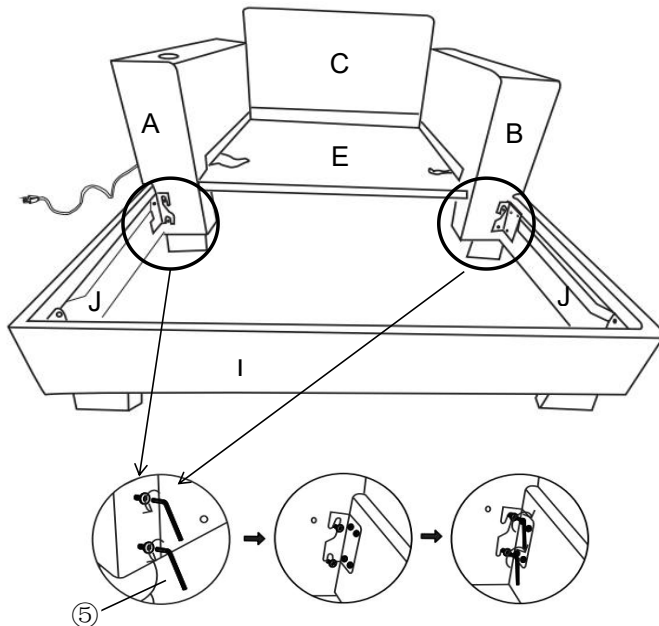


After ensuring the hooks on both ends of two Rails(J) are securely fastened with Left Armrest(A)and Right Armrest(B), tighten all bolts with Allen Wrench(⑤) as picture showed.

Step 10

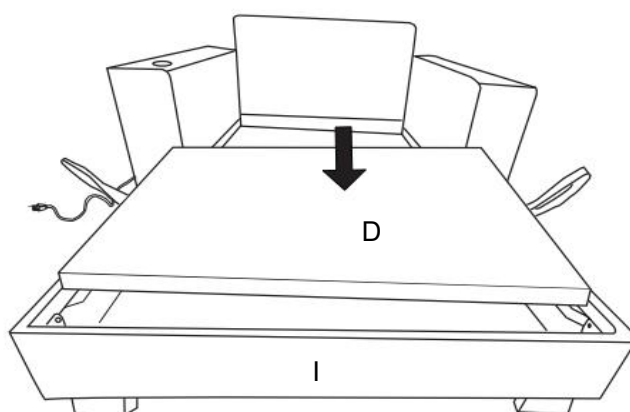


Place the Front Seat Panel(D) onto the Rail of sofa, and then slowly place it down as shown above.

Step 11

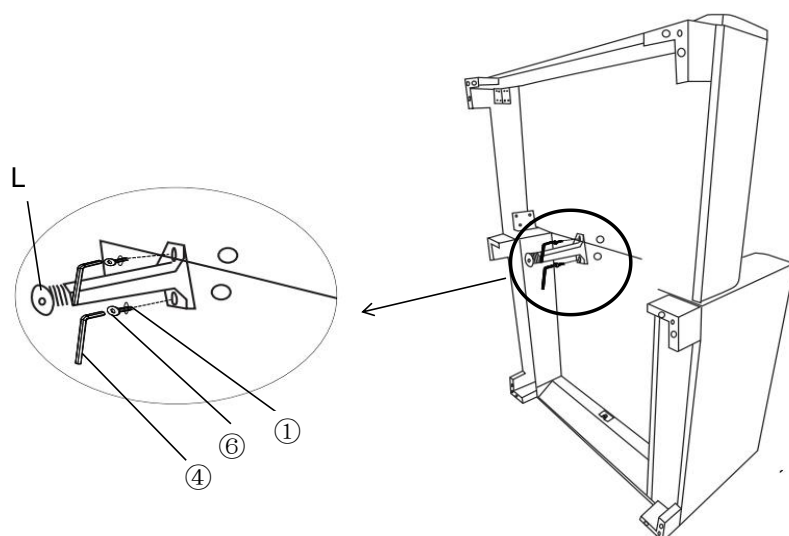


Install the Middle Leg(L) on the Back Seat Panel(E) and Front Seat Panel(D) by using Bolt (⑥) and Flat Washer(①) with the Allen Wrench(④), turning clockwise until tightened.

Step 12

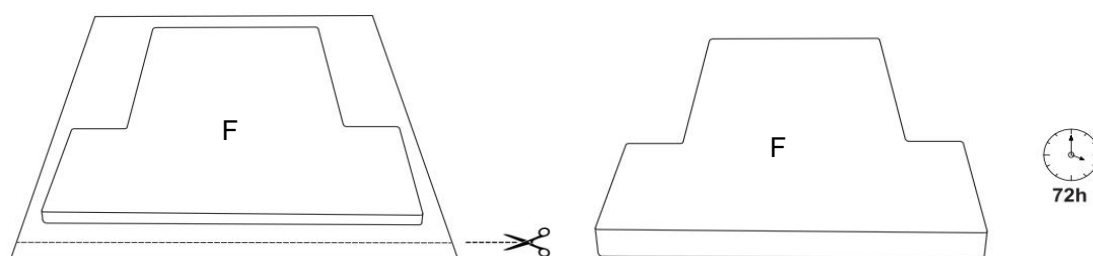


Cut the Seat Cushion (Package)(F). It may take up to 72 hours for the Seat Cushion(F) to fully fluff up.

Step 13

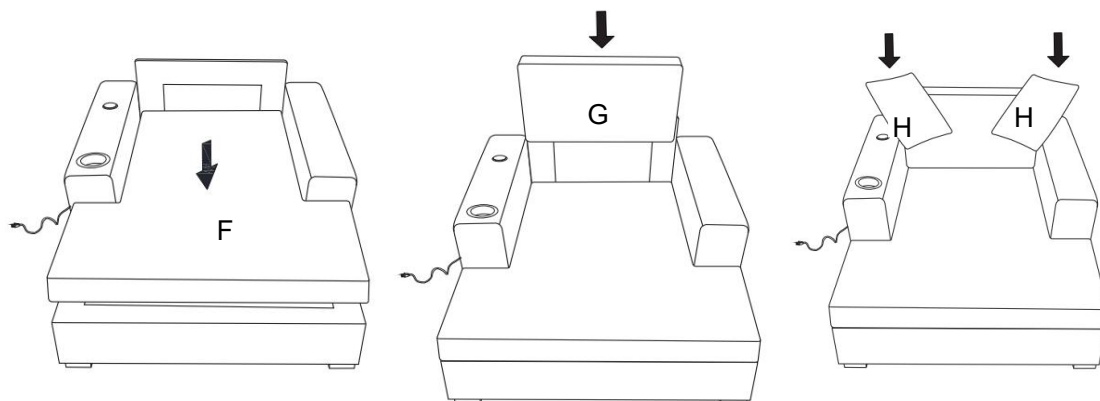


Place the Pillow (H) and Seat Cushion(F) and Back Cushion(G) on the Chaise Lounge.

Step 14

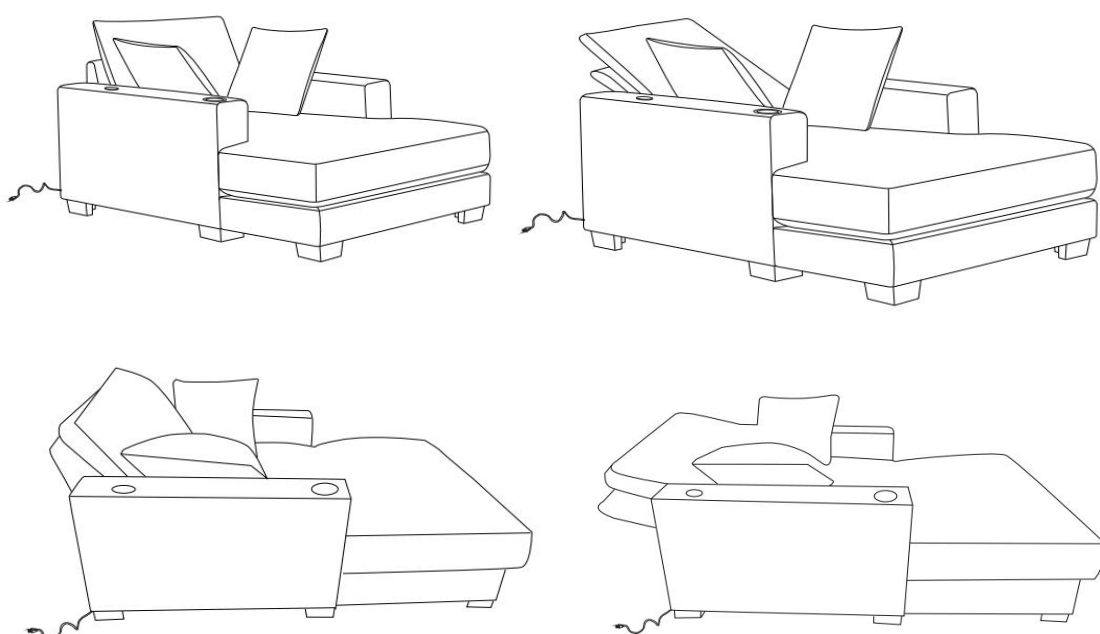

The sofa backrest can be manually moved and folded to lie in various angles.

Step 15

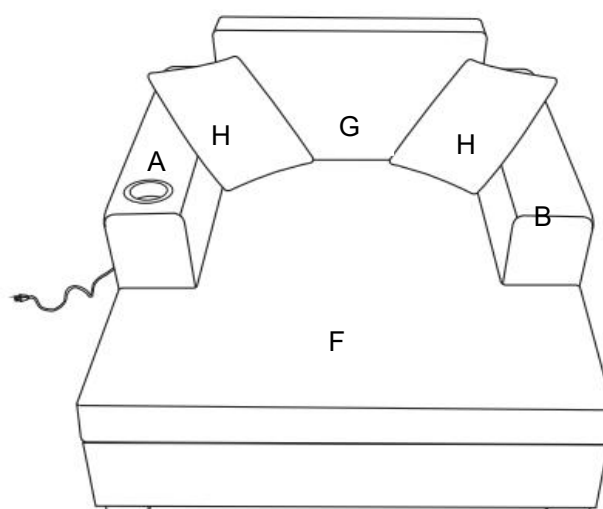

Your Chaise Lounge is ready for use.
This Chaise Lounge can only be used on a flat, level surface.