




S-TRAP INSTALLATION INSTRUCTIONS

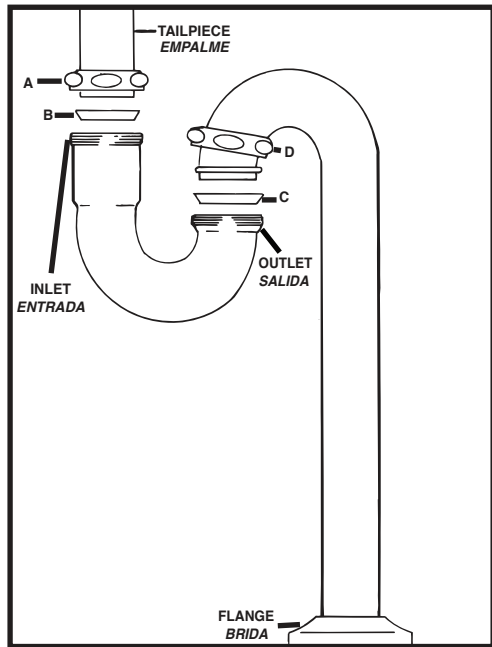

The S Trap is easy to install as a waste connection between a sink tailpiece and floor outlet.

INSTALLATION HINTS:

1. Since it “traps” items that may fall into the drain and blocks gases from the waste drain system, water and dirt will be present in the existing trap. Place a bucket under the old trap before attempting to remove it.
2. Put Teflon® tape or pipe dope on the drain threads before attaching nuts. This will provide a better seal against leaks.
3. Use a scrap of cloth to protect chrome finish on the nuts when you tighten with a wrench.

RECOMMENDED PROCEDURE FOR INSTALLATION

1. Turn off water at the tap.
2. Remove old S Trap.
3. Remove nuts **A** and **D** and washers **B** and **C** from inlet and outlet of J Bend.
4. Slip nut **D** along entire length of drain tube as illustrated.
5. Slip flange over the drain tube.
6. Attach drain tube to waste line at floor.
Note: For new installations make sure you have the proper adapter in drain line to accept drain tube.
7. Put washer **C** from outlet of J Bend on drain tube.
8. Put nut **A** and washer **B** on tailpiece.
9. Position J Bend. Hand-tighten nuts from tailpiece and drain tube.
10. Align parts and tighten with wrench. Run water to test for leaks.
11. Slide flange to the floor.

LIMITED WARRANTY

If this Keeney product, when used for its intended purpose, fails due to defects in materials or workmanship over a period of one (1) year from the date of original installation, return the item to The Keeney Manufacturing Company (at your expense) where, at our option, we will exchange or recondition the item free of charge. We require a proof of purchase. For full warranty details visit keeneymfg.com/warranty