





Sanliv Faucet Installation Manual

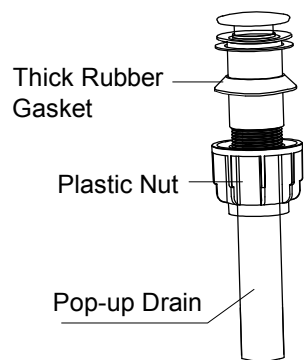


The other side of our equipped 3/8 wrench can also be used to tighten the hot and cold supply water hoses on the angle valve.




- Notice:
- 1.You can choose not to install the deck plate if your basin has only 1 hole.
 - 2.Must make sure all the pre-installed water hoses are tightened while installing. If not, tighten clockwise.

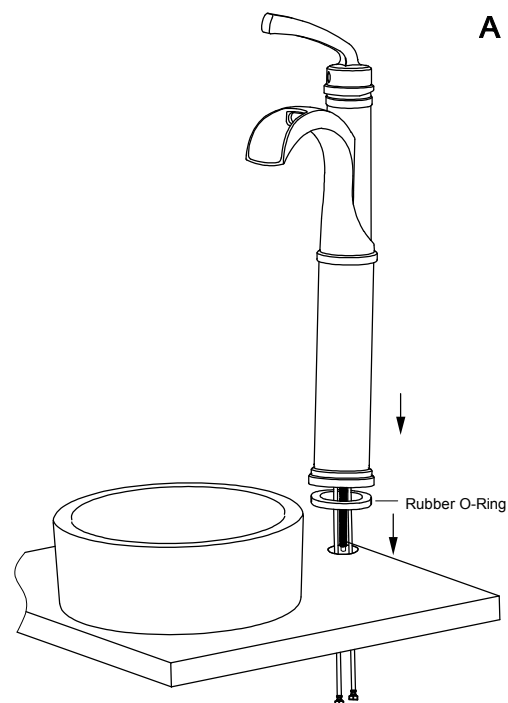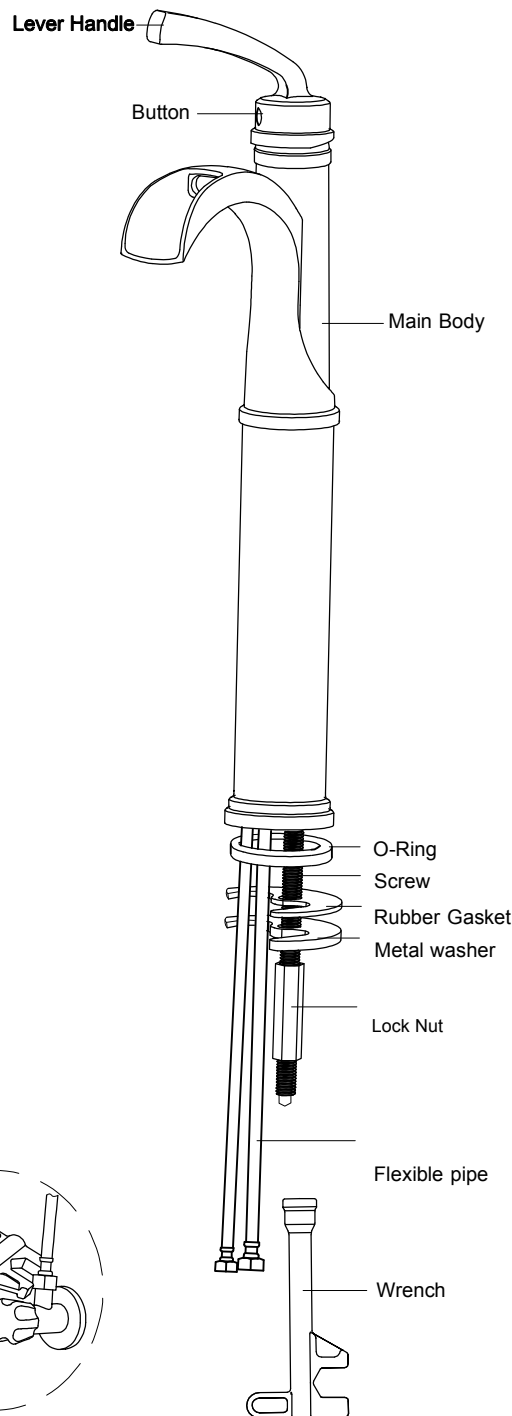


1. Install the faucet onto the mounting surface of the basin in sequence.

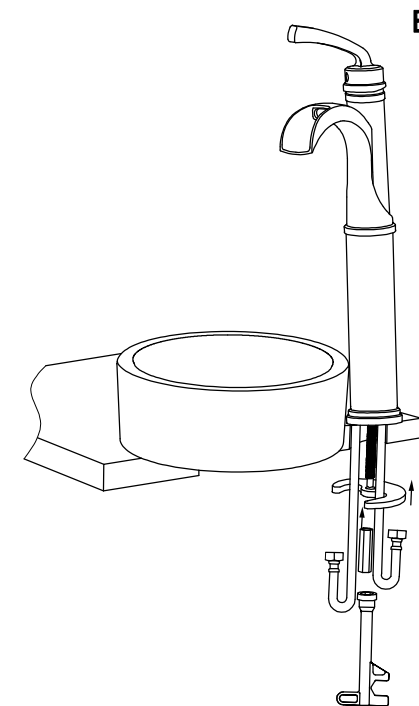

2. Thread the flat gasket and washer through the screw, and tighten the nut using the wrench provided in the box to fix the faucet.

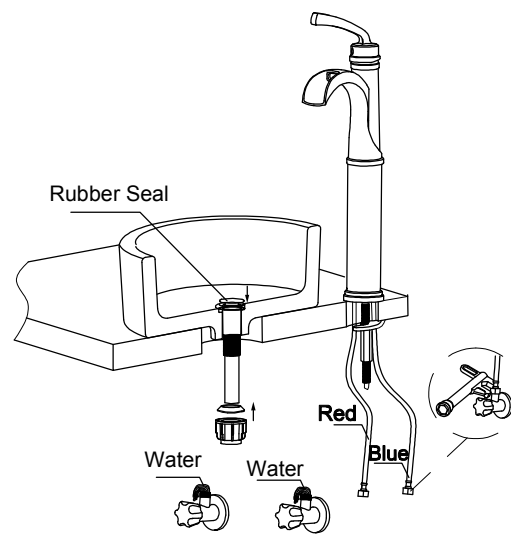

- 1.Open the angle valve to discharge the sewage.
- 2.Use our equipped 3/8 plastic wrench to tighten the hot and cold supply water hoses on the angle valve.
- 3.Insert the drain with rubber seal into the drainage hole.
- 4.Place the thick rubber gasket and tighten the plastic nut.

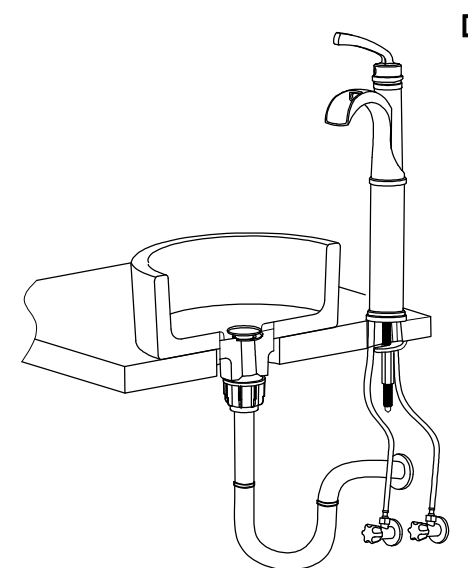

- 1.Connect the pop-up drain with your own drainage hose.
- 2.Open the lever handle to check if the faucet is working properly or any leaks.