

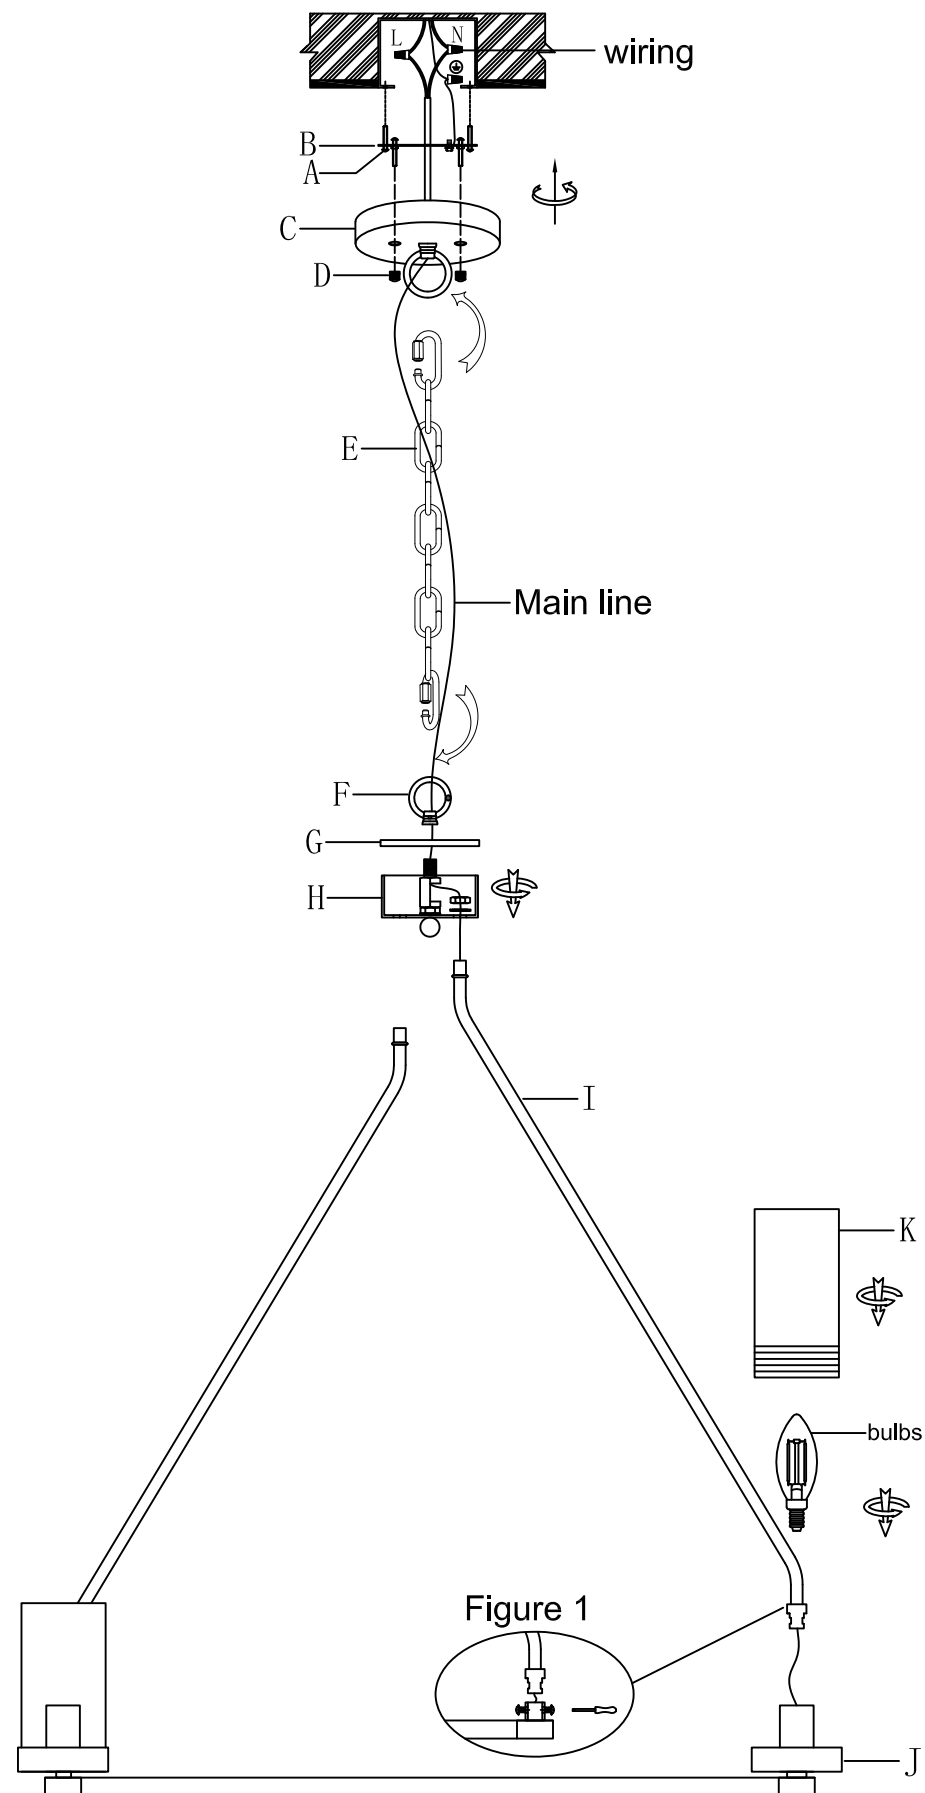


Installation & Assembly

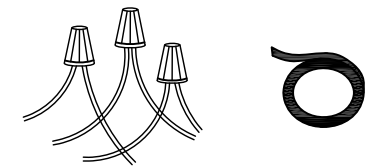

wiring

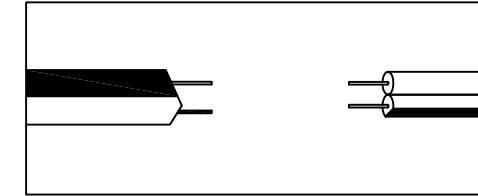

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut.
 Connect fixture hot wire (smooth with markings) to the outlet box hot wire (usually black) using a wire nut.
CAUTION: Do not reverse the hot and neutral connections
Grounding Instructions:
 Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.

Installation steps

- 1.Count spare parts
- 2.Lock (B) to the ceiling with (A)
- 3.Pass the main wire through (I) and install (I) on (J) and lock it as shown in Figure 1.
- 4.Pass the main wire through (H) and lock (H) on (I).
- 5.Pass the main wire through (G) and (F) and use (F) to lock (G) on (H) and lock it tightly.
- 6.Pass the main wire through (C) and lock (E) on (F) and (C) respectively.
- 7.After wiring, use (D) to lock (C) on (B).
- 8.Install light bulbs MAX 12*40W