


ASSEMBLY INSTRUCTIONS FOR #12706(M58)

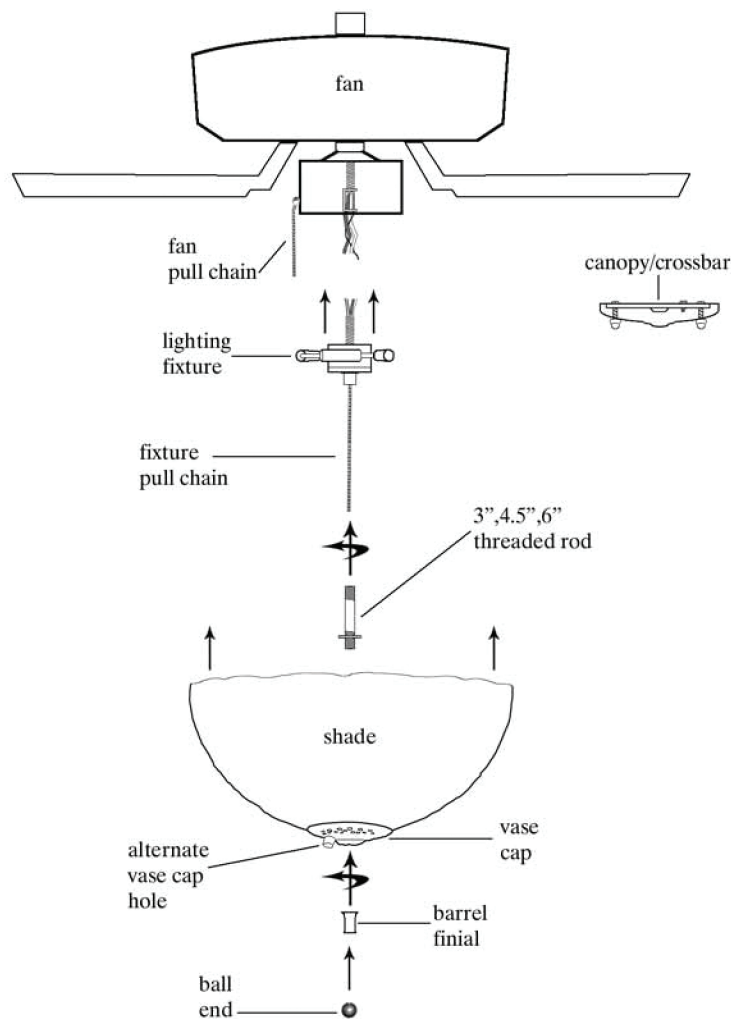

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

1. Remove and disregard canopy and crossbar from lighting fixture.
2. Attach lighting fixture to fan unit.
3. Wire as per local electrical code.
4. Lighting fixture comes with a 3", 4.5" and 6" threaded rod. Determine the correct length rod for your shade. Remove ball end from fixture pull chain, place correct length threaded rod over pull chain and screw into barrel nut.
5. Place shade up and onto lighting fixture threaded rod, make sure lighting fixture pull chain goes through center hole of shade vase cap, thread fan pull chain through alternate hole located off center on shade vase cap.
6. Place barrel finial up and over lighting fixture pull chain and screw onto threaded rod, tighten to shade vase cap.
7. Replace ball end to lighting fixture pull chain.



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00 a.m. - 6:00 p.m. ET

visit us on the web at www.meyda.com