

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

Quill

Mini Pendant 4CCT

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-59416 16"	2700K	AB Aged Brass	8 W	670	577
	3000K	BK Black	8 W	670	577
	3500K	CH Chrome	8 W	670	577
	4000K		8 W	670	577

Example: **PD-59416-40-CH**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Precisely lined. V-groove flared glass radiates a prismatic glow. Staggered elements create a sense of motion, heightening the drama of this statement piece.

FEATURES


- V cut glass diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- May be mounted on a sloped ceiling
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy

SPECIFICATIONS


Color Temp:	3500K,3000K,4000K,2700K
Input:	120/277V,50/60Hz
CRI:	90
Dimming:	ELV: 100-10% ,TRIAC: 100-5%
Rated Life:	50000 Hours
Standards:	ETL, cETL Damp Location Listed
Construction:	Aluminum Hardware with Glass body



FINISHES:



LINE DRAWING:

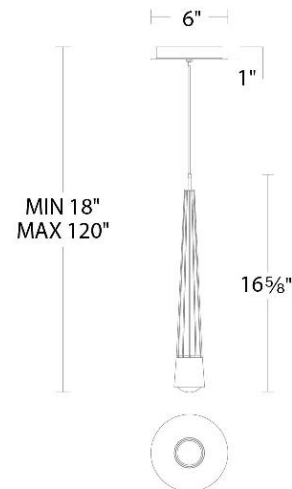

PD-59416