



SpaViva™ | K-28681-G

Two-function handshower, 1.75 gpm

Features

- Multifunction handshower with advanced spray engine provides two spray experiences: Full Coverage with Katalyst technology and MicroBubble
- MicroBubble spray infuses tiny bubbles into water to help clean pores and leave skin feeling refreshed
- Full coverage with Katalyst® air-induction technology delivers a drenching spray experience, ideal for rinsing shampoo from hair
- Easily transition between sprays with control buttons on sprayface
- Handle extends 2-5/8" (67 mm) with push of a button to wash hard-to-reach areas
- 1.75 gpm (6.6 lpm) maximum flow rate
- Pairs with the K-28683 SpaViva™ all-in-one cleansing device (sold separately)
- Requires shower hose (sold separately)



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|-------------------------------|
| CP | Polished Chrome |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-22-2026 02:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate
Handshower Rated Maximum 1.75 gpm (6.6 l/min)
Flow:

Material

- Premium material construction for durability and reliability
 - KOHLER finishes resist corrosion and tarnishing
-

Recommended Products/Accessories

K-45982 60" ribbon hose
K-98770 Shower arm diverter

Technology



- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



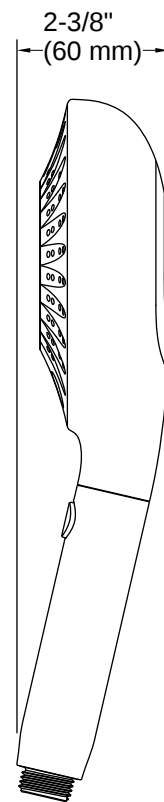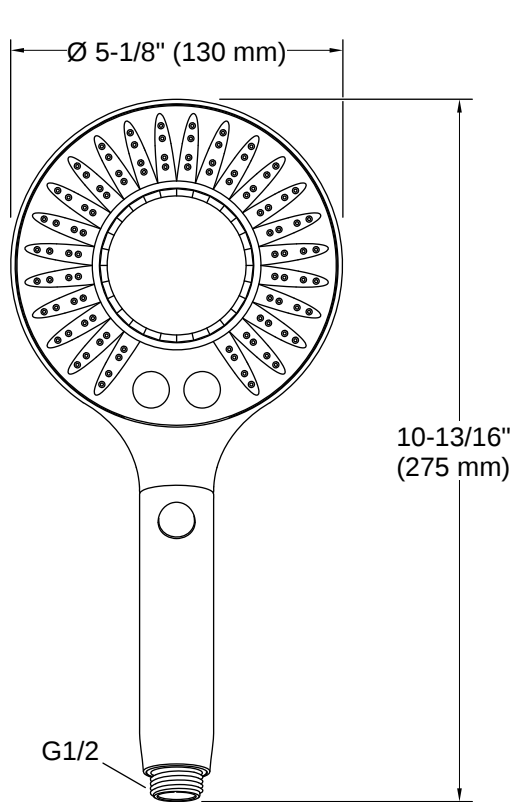

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.05 gal/min (4 l/min) or less.

