


Assembly Instructions

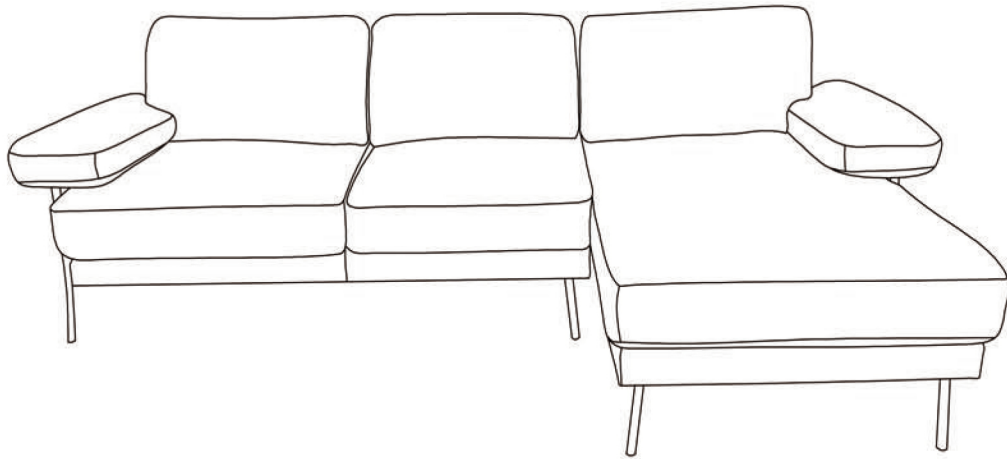

ASSEMBLY RATING

The Assembly Rating is a 5-point system that shows the degree of effort needed in assembling a specific product (with 1 being easy and 5 being difficult). For some products, two persons are recommended.

EASY  DIFFICULT

Tools Required for Assembly:

Allen Wrench



(Included)

Phillips Screwdriver



(Not included)




2 PERSONS RECOMMENDED

ASSEMBLY & CARE ADVICE

FOR YOUR FURNITURE TO LAST, CORRECT ASSEMBLY AND PROPER MAINTENANCE ARE NECESSARY. PLEASE FOLLOW THE INFORMATION PROVIDED BELOW TO FULLY ENJOY YOUR FURNITURE.


BASIC ASSEMBLY TECHNIQUES

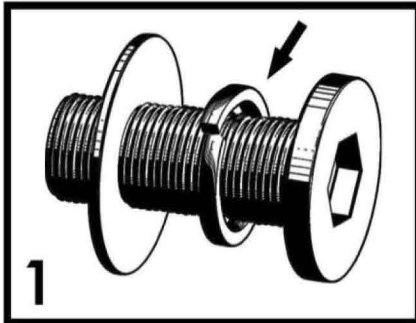


When lock or spring washer is used in an assembly, please make sure the lock or spring washer is placed between the larger flat washer and the head of the screw or bolt.




Position each part correctly and insert screws or bolts into their respective holes by hand tighten or using the proper hand tool. Only tighten when step is completed or when instructed to do so.

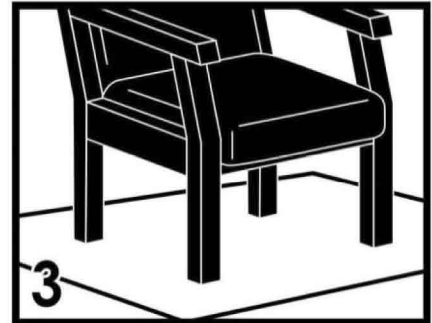


Use cardboard or carpet area when assembling furniture to prevent scratches. Make sure the furniture rests on a flat and level surface with each leg evenly touching the floor.

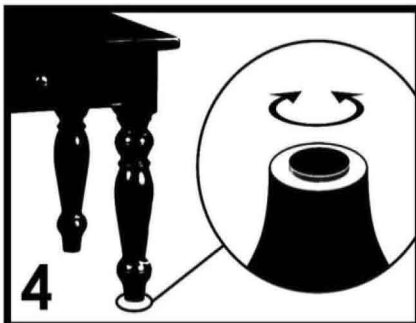

Some furniture comes with height adjustment knobs underneath each leg. To lower or to raise each leg, you need to turn clockwise or counterclockwise, respectively.

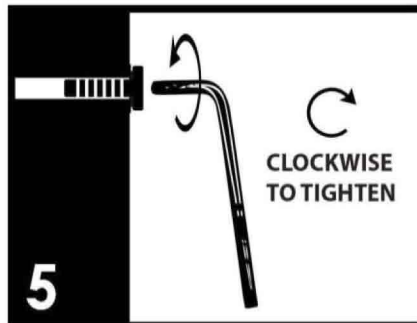

Make sure all parts are properly aligned, then use the appropriate hand tool to completely tighten the bolts or screws. Do not use power tools and do not overtighten.

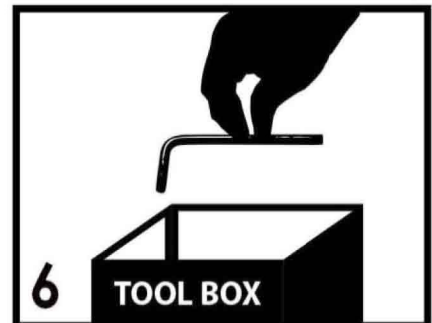


Save the instructions and store the Allen wrench or any supplied tool for later maintenance. After two weeks, check and tighten any loose hardware and repeat again every six months thereafter.

IT IS THE USER'S RESPONSIBILITY TO MAINTAIN THE FURNITURE. THE HARDWARE MAY LOOSEN OVER TIME AND MAY CAUSE THE FURNITURE TO BE WOBBLY AND UNABLE TO SUPPORT ITS INTENDED WEIGHT CAPACITY. THIS MAY LEAD TO COLLAPSE AND MAY CAUSE SERIOUS INJURY.



FAILURE TO FOLLOW THE GUIDELINES ABOVE MAY RESULT IN INJURY AND/OR PROPERTY DAMAGE.

Parts List



#1 x 1 pc
Sofa seat



#2 x 1 pc
Sofa back cushion



#3 x 1 pc
Sofa back cushion




#4 x 1 pc
Sofa headrest



#5 x 1 pc
Sofa arm support



#6 x 1 pc
Sofa arm cushion



#7 x 1pc
Chaise seat



#8 x 1pc
Chaise back cushion



#9 x 1pc
Chaise headrest



#10 x 1pc
Chaise arm support



#11 x 1pc
Chaise arm cushion

Hardware List



#A x 8 pcs
Bolt M8*50mm



#B x 5pcs
Bolt M8*20mm



#C x 8 pcs
Bolt M6*20mm



#D x 15 pcs
Screw



#E x 13 pcs
Flat Washer M8



#F x 8 pcs
Flat Washer M6



#G x 2 pcs
Allen Wrench M8




#H x 2 pcs
Allen Wrench M6

Parts List



#12 x 2 pcs
Middle leg




#13 x 5 pcs
Leg



#1

Prepare 4 bolts assembly by inserting washer (#F) onto bolts (#C). Align sofa arm support (#5) to the holes of the sofa arm cushion (#6). Secure by using bolts (#C).


#C x 4 pcs
#F x 4 pcs

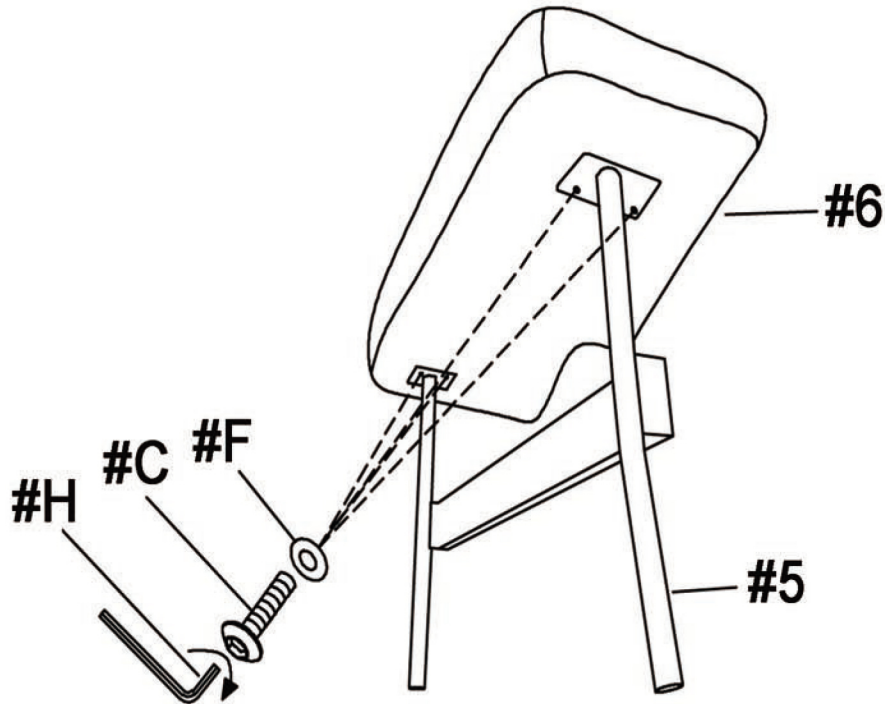

#2

#A x 4 pcs
#B x 2 pcs
#E x 6 pcs
#D x 6 pcs

3) Attach middle leg (#12) to the middle hole of the sofa seat (#1).

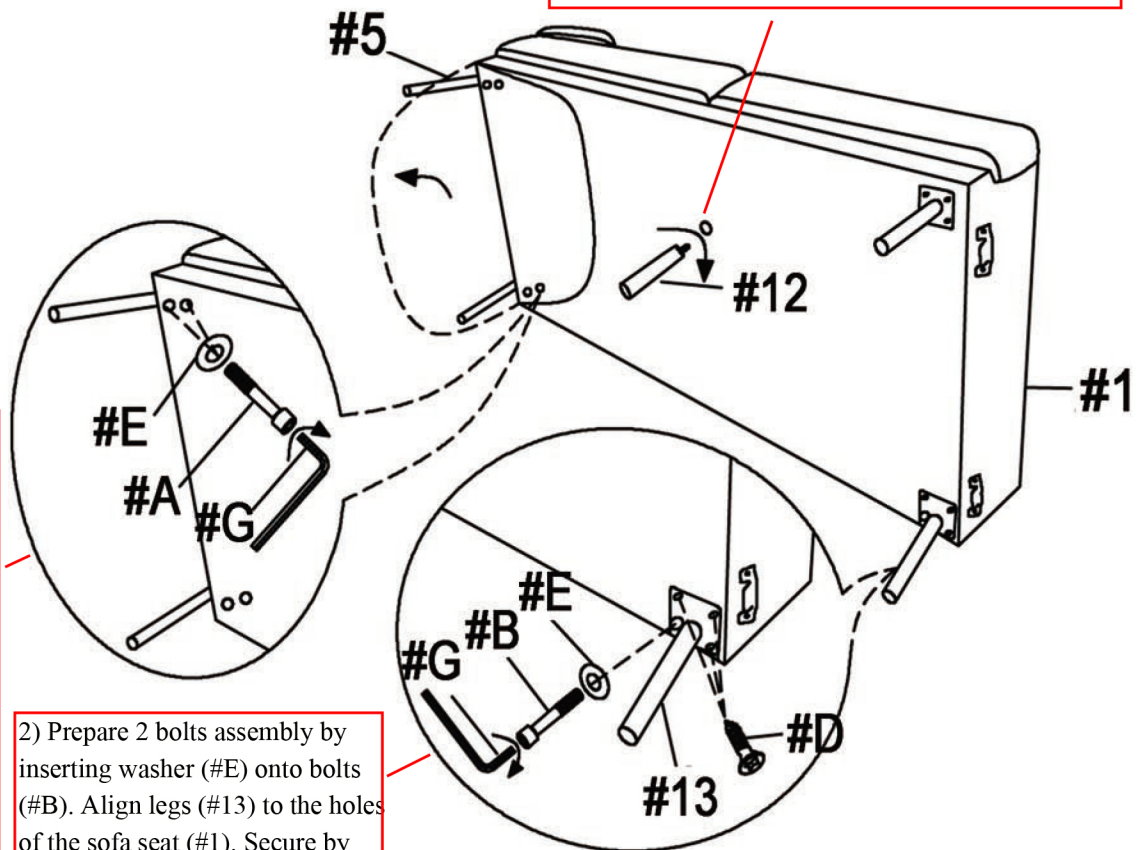


1) Prepare 4 bolts assembly by inserting washer (#E) onto bolts (#A). Open the bottom compartment of the sofa seat (#1), then align the sofa arm support (#5) to the holes of the sofa seat (#1). Secure by using bolts (#A) through the bottom compartment of the sofa seat (#1).


2) Prepare 2 bolts assembly by inserting washer (#E) onto bolts (#B). Align legs (#13) to the holes of the sofa seat (#1). Secure by using bolts (#B) and screws (#D).



Align and attach the metal brackets of the sofa headrest (#4) to the metal brackets of the sofa seat. Make sure it is firmly in place.

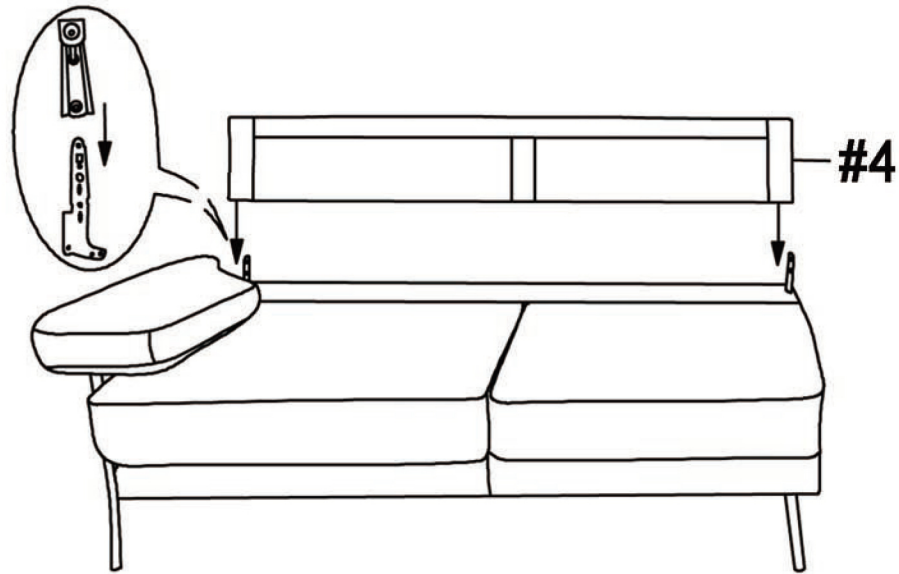


Place cushions (#2,3) onto the seat.

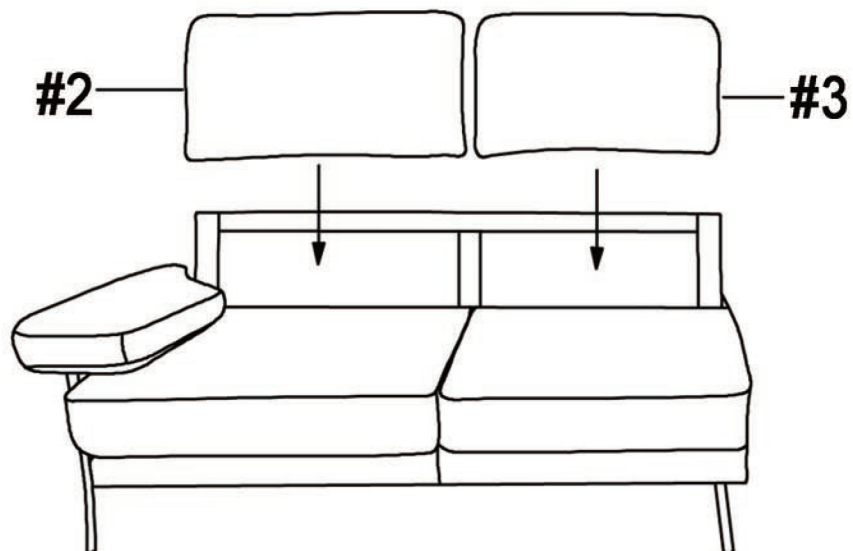



Prepare 4 bolts assembly by inserting washer (#F) onto bolts (#C). Align chaise arm support (#10) to the holes of the chaise arm cushion (#11). Secure by using bolts (#C).


#C x 4 pcs
#F x 4 pcs

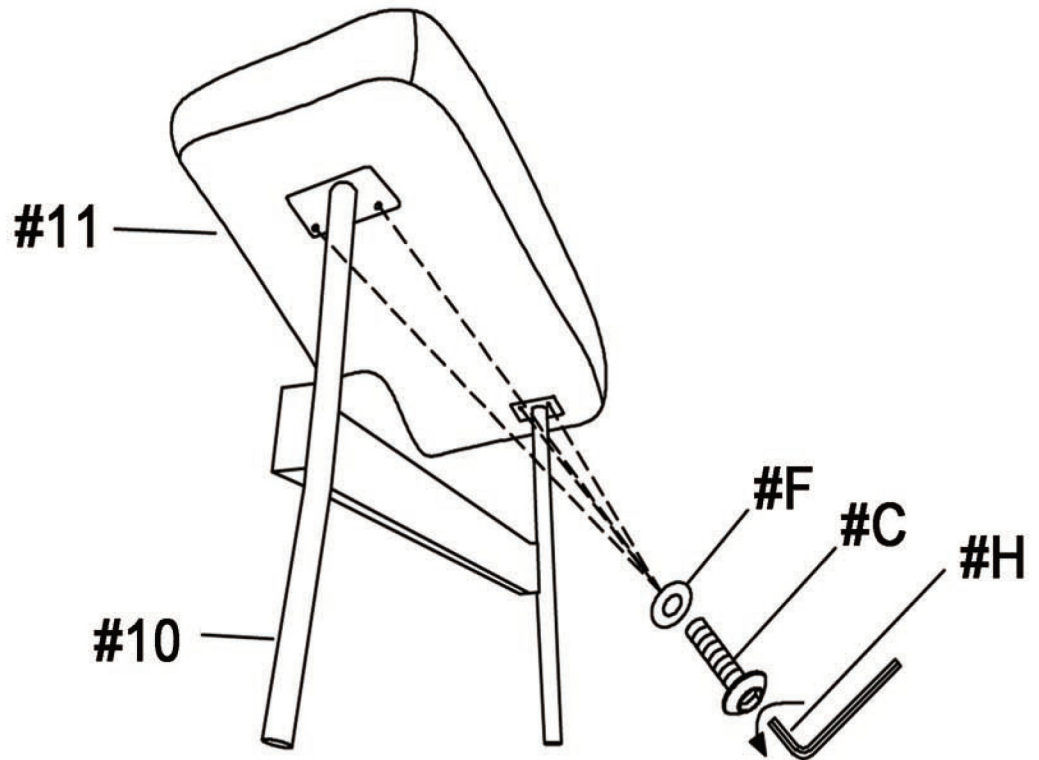

2) Prepare 2 bolts assembly by inserting washer (#E) onto bolts (#B). Align legs (#13) to the holes of the chaise seat (#7). Secure by using bolts (#B) and screws (#D).

3) Attach middle leg (#12) to the middle hole of the chaise seat (#7).


#A x 4 pcs
#B x 3 pcs
#E x 7 pcs
#D x 9 pcs

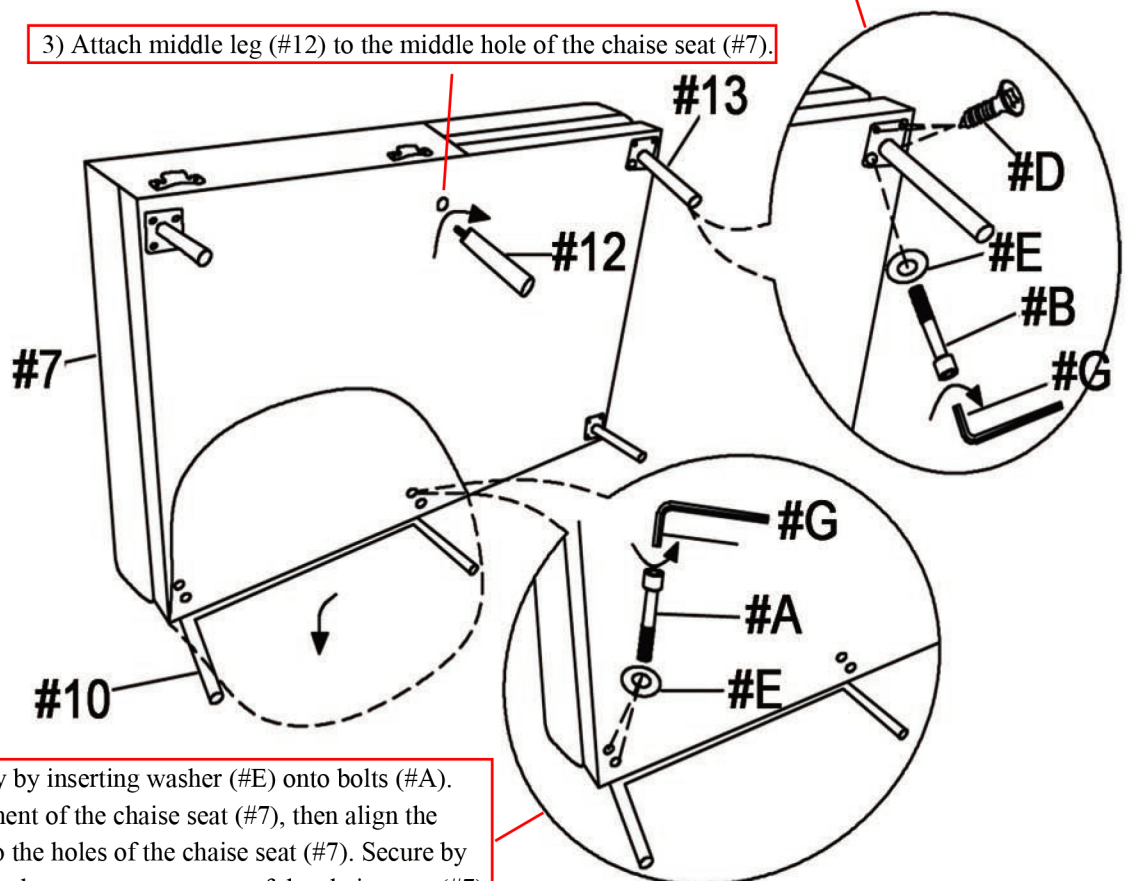


1) Prepare 4 bolts assembly by inserting washer (#E) onto bolts (#A). Open the bottom compartment of the chaise seat (#7), then align the chaise arm support (#10) to the holes of the chaise seat (#7). Secure by using bolts (#A) through the bottom compartment of the chaise seat (#7).



Align and attach the metal brackets of the chaise headrest (#9) to the metal brackets of the chaise seat. Make sure it is firmly in place.


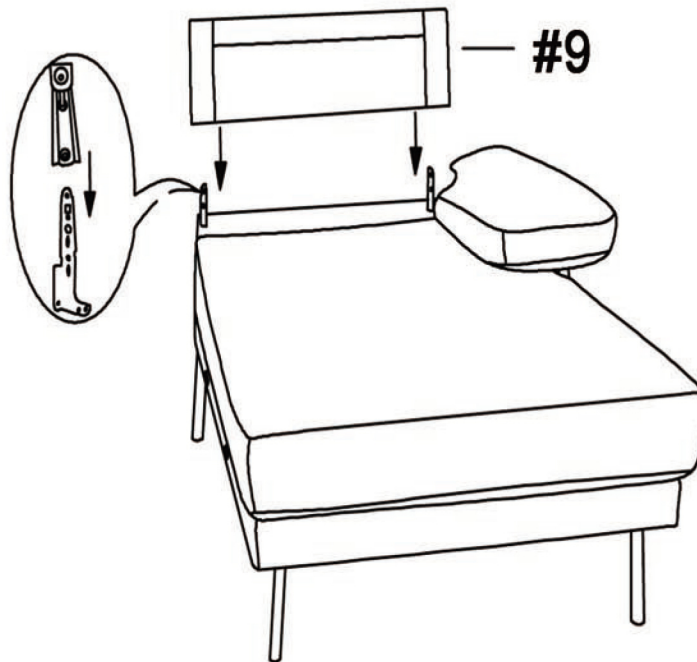


Place cushion (#8) onto chaise seat.

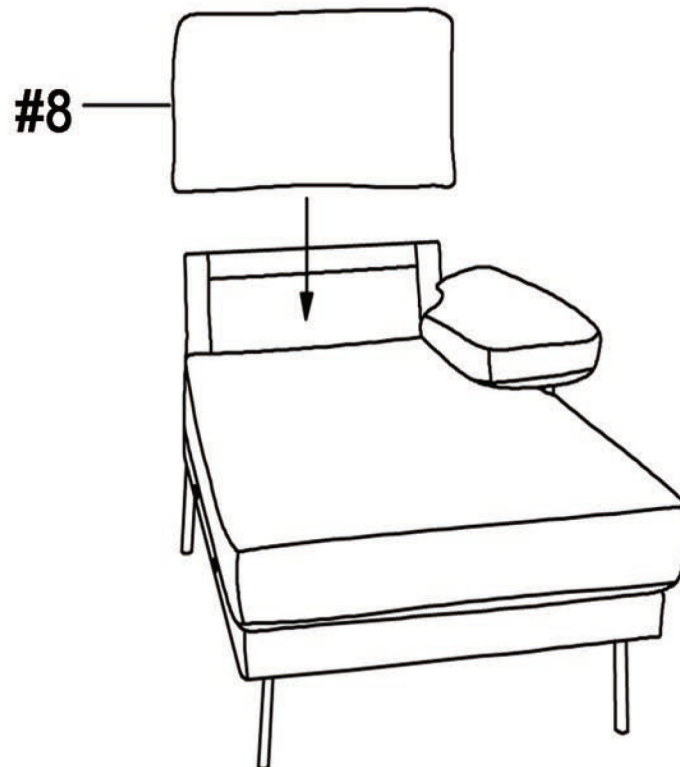



Align and attach metal brackets of the chaise seat to the metal brackets of the sofa seat. Make sure it is firmly in place.

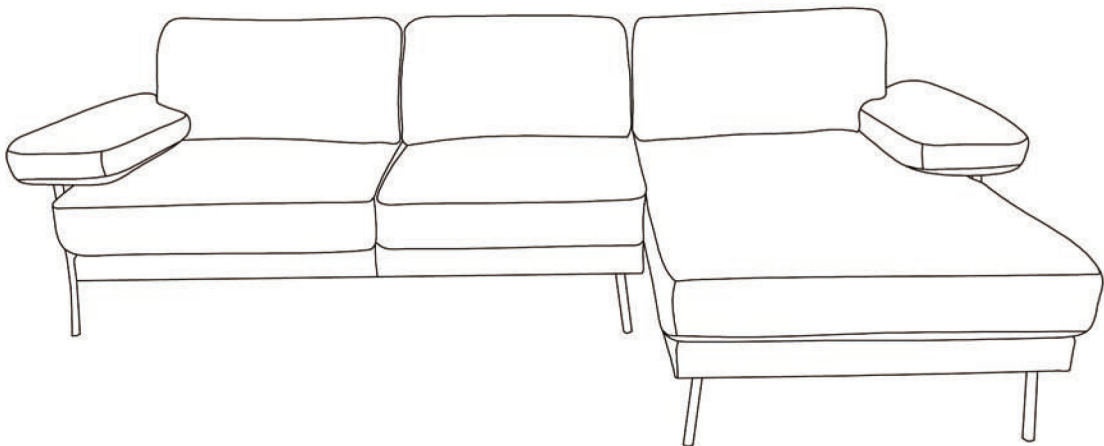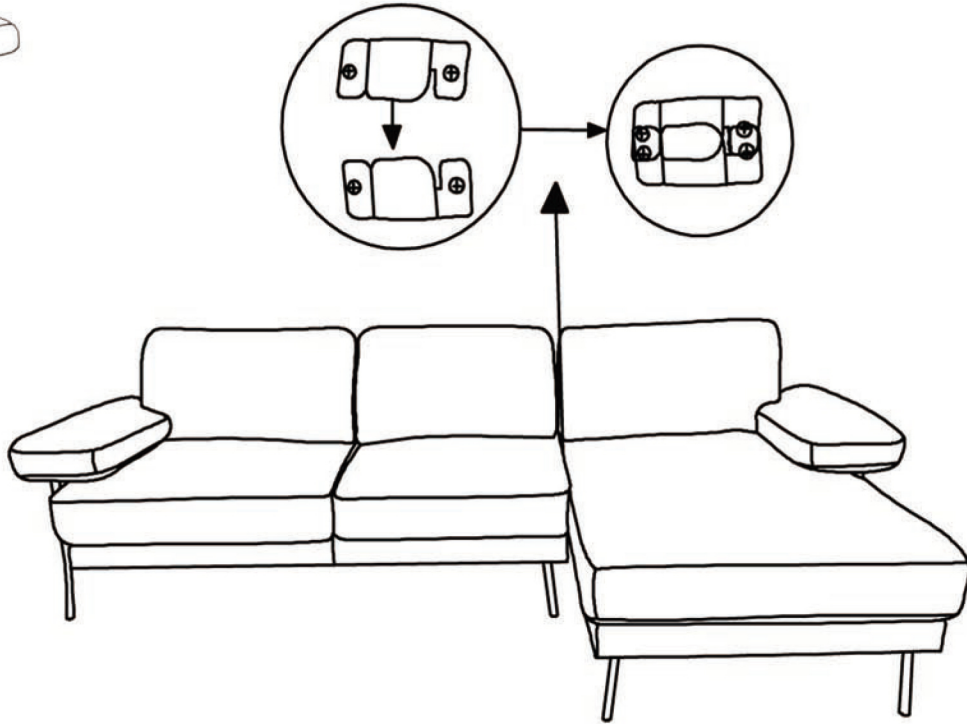

ASSEMBLY IS COMPLETED