
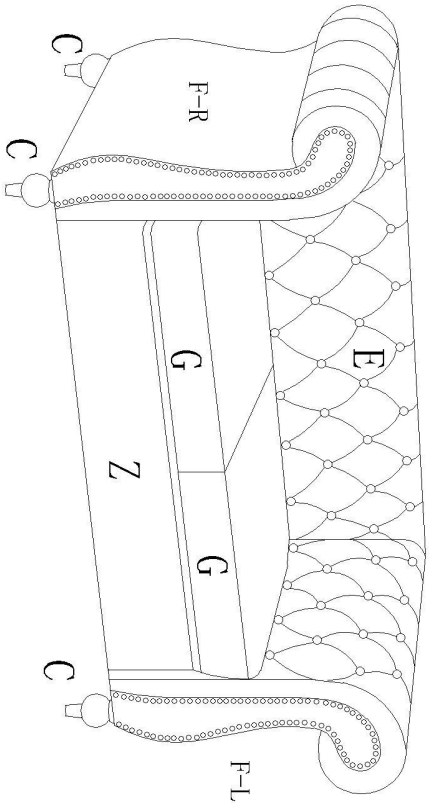



# ASSEMBLY INSTRUCTIONS

ITEM S5677/S5678/S5679/S5680/S5681/S5682




|                                                                                                              |                                                                                                            |                                                                                                      |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| <br>A: Allen Key<br>1PC    | <br>B: Beitz<br>4PCS     | <br>C: Leg<br>4PCS |
| <br>D: Shim<br>4PCS         | <br>E: Backrest<br>1PC    | <br>F: Arm<br>2PCS  |
| <br>G: Seat Cushion<br>2PCS | <br>H: Seat Board<br>1PCS |                                                                                                      |
| <br>Z: Front Beard<br>1PCS   | <br>K: Center Bar<br>1PCS |                                                                                                      |


STEP1

A line drawing of the chair's seat assembly. The seat is a rectangular wooden board (H) with a tufted leather-like backrest (E) attached to its rear. The backrest is secured with four corner fasteners (C). The seat is supported by two wooden legs (C) at the front. A horizontal wooden bar (Z) is positioned in front of the seat, supported by two vertical wooden pieces (G). The entire assembly is shown from a side perspective.


STEP2

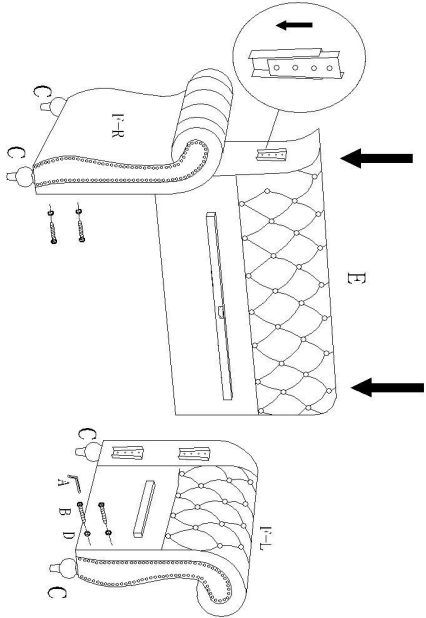


STEP3

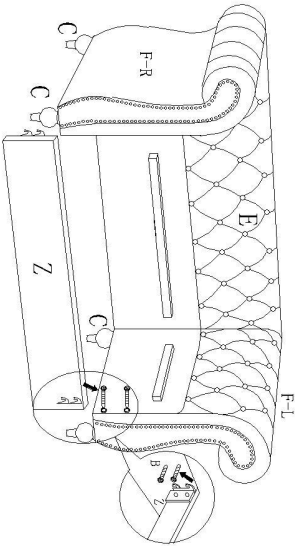


STEP4

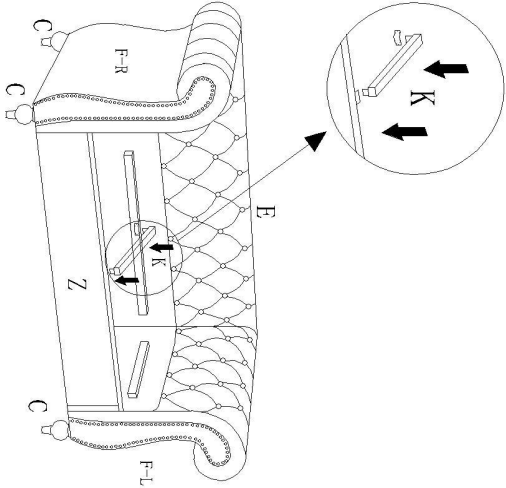

STEP5

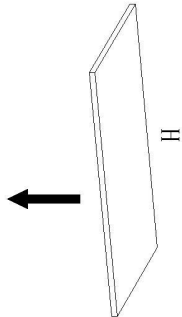

STEP6

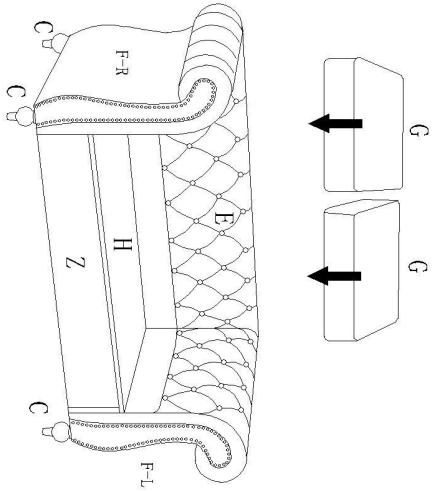

STEP7

