artos®

F907-18/5


INSTALLATION GUIDE

12” shower rainhead,
ceiling mount, 4.75” arm
round + square


BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)





WESTOVER, INC **13305 B STREET OMAHA, NEBRASKA 68144** **WWW.ARTOS.US.COM** **T:877.927.8679**

©071822 ed. All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos®

F907-18/5

12” shower rainhead,
ceiling mount, 4.75” arm
round + square

OPERATING SPECIFICATIONS



FLOW RATE
1.8 USGPM

TEMPERATURE
Maximum: 176°F

OPERATING PRESSURE
Maximum: 125psi
Minimum: 20psi
Recommended: 30psi- 95psi

INLET
1/2” MALE NPT


All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.


artos®


F907-18/5


PRODUCT DIMENSIONS

12” shower rainhead,
ceiling mount, 4.75” arm
round + square





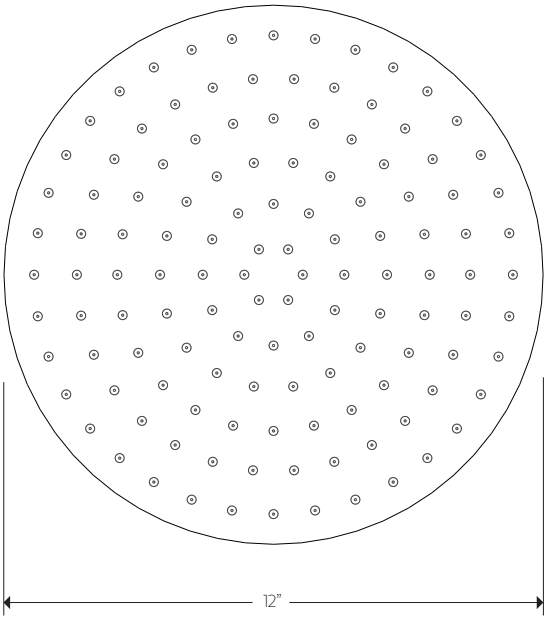

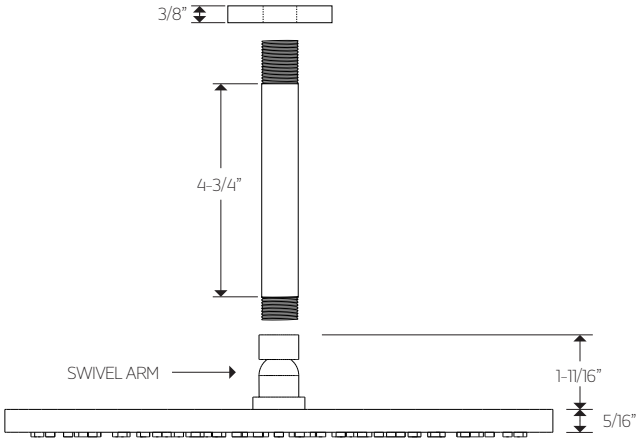


All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos®


F907-18/5

12” shower rainhead,
ceiling mount, 4.75” arm
round + square

STEP 1

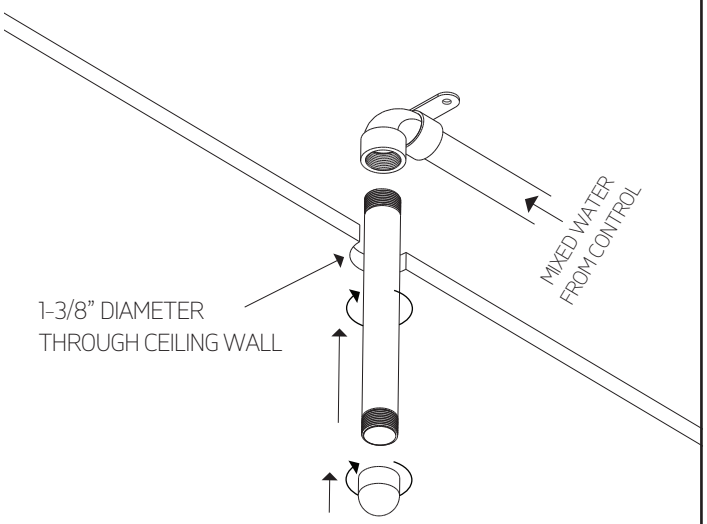


STEP 2

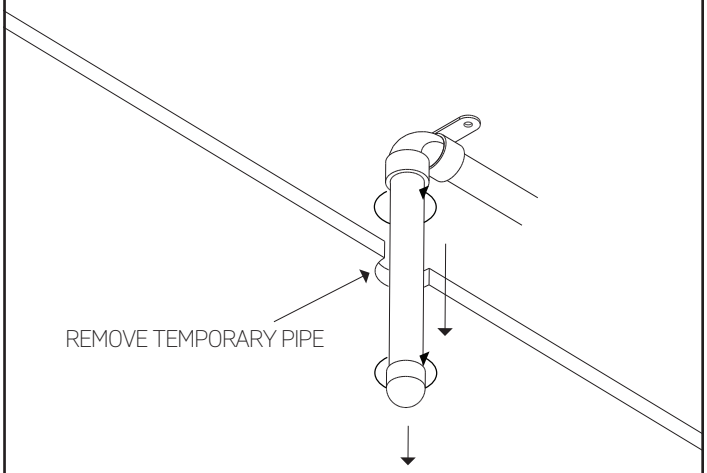


All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

STEP 3

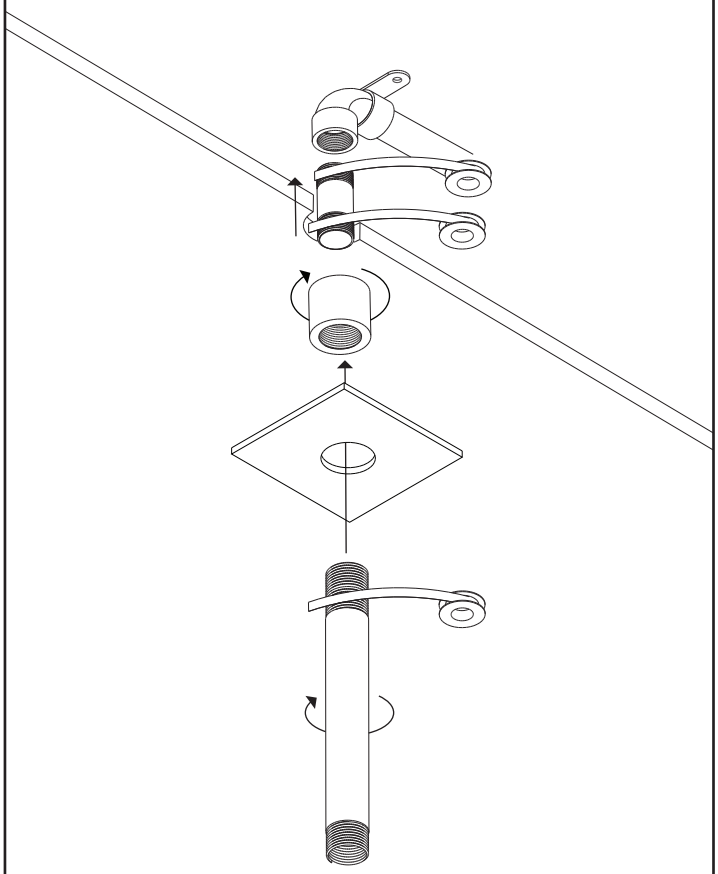

STEP 4

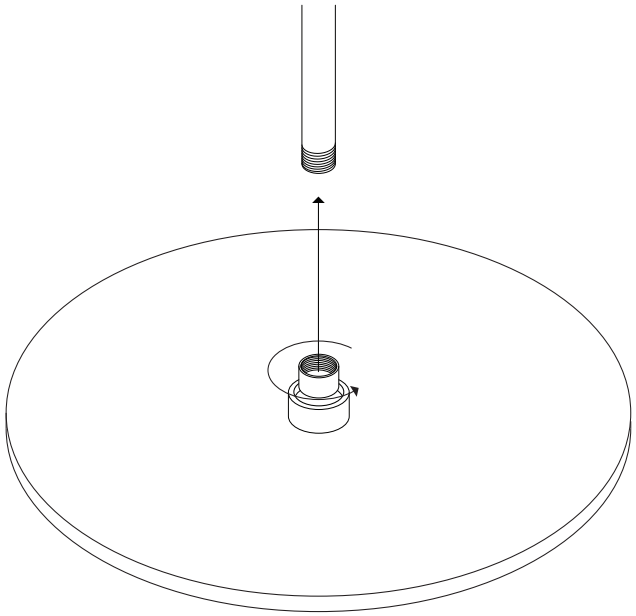


All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.

artos®

F907-18/5

PARTS BREAKDOWN

12” shower rainhead,
ceiling mount, 4.75” arm
round + square

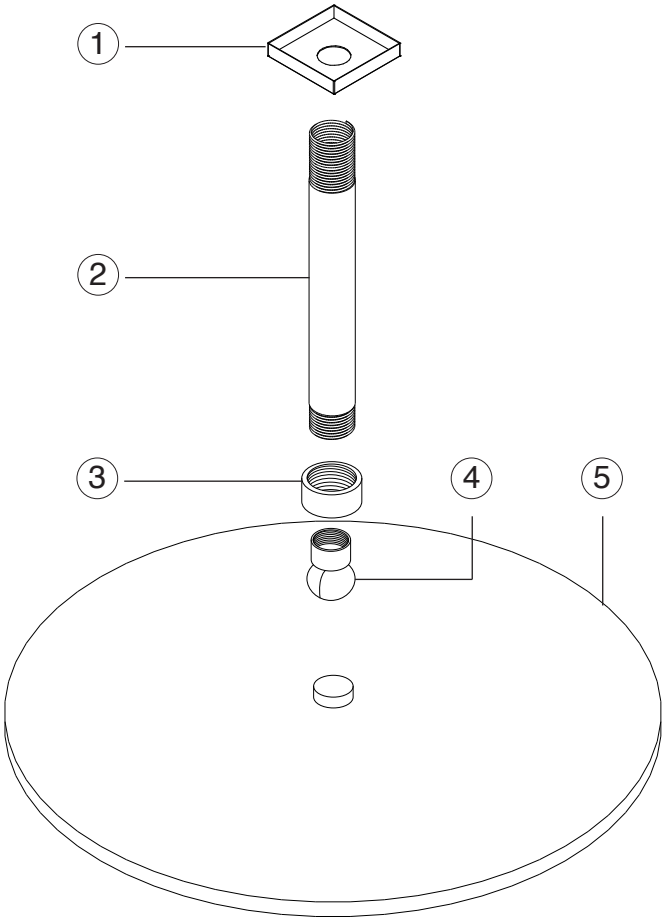

1. **ESCUTCHEON**
2. **SHOWER ARM**
3. **SWIVEL ARM SECURING NUT**
4. **SWIVEL ARM**
5. **RAINHEAD**

All technical and pricing information is subject to change without prior notice. To confirm accuracy check with Artos customer service.