





Assembly Instruction Sheet


Night Stand with USB Port

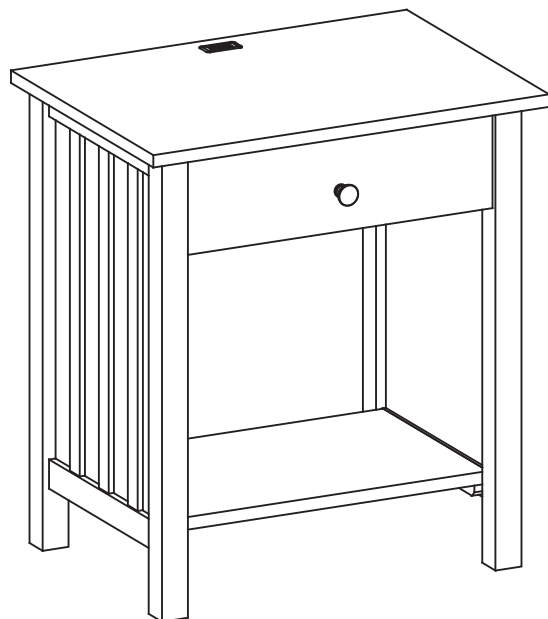





Hardware

Part	Description	
RF10052	Screw JCB M6 x 30	12 Pcs.
		
RF40170	Knob	1 Set
		
RF40103	Allen Key	1 Pc.
		

USB Port

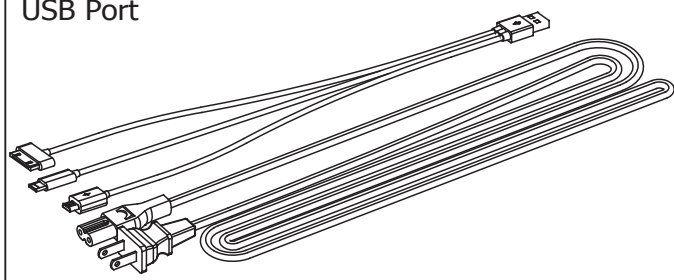

Parts List

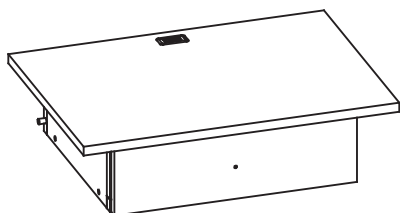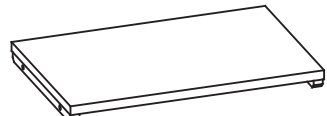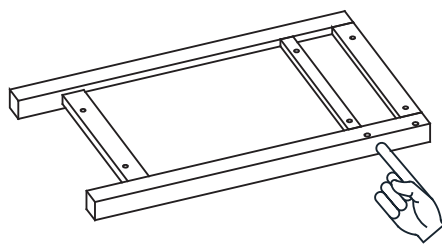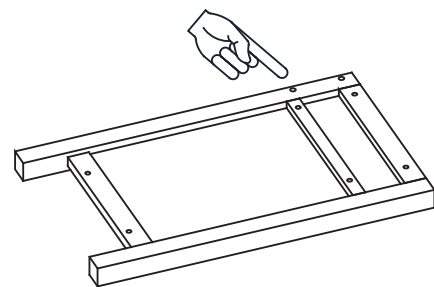Part	Description	
A	Top Set	1 Pc.
		
B	Shelf	1 Pc.
		
C	Left Panel	1 Pc.
		
D	Right Panel	1 Pc.
		

USB Adapter Specifications

Input Voltage	AC 100-240V 50/60Hz
Input Current	≤ 350mA @ 220V AC w/ full load
Output Voltage	5.0V ± 0.25V
Load Regulation	-0.5% (Max)
Output Current	3.1A Max
Output Ripple	< 400mV p-p
Efficiency	> 75% @ 220V AC
Output Plug	USB Type A x 4
Over Power	≈ 17W @ 220V AC
Short Protection	Auto Recovery

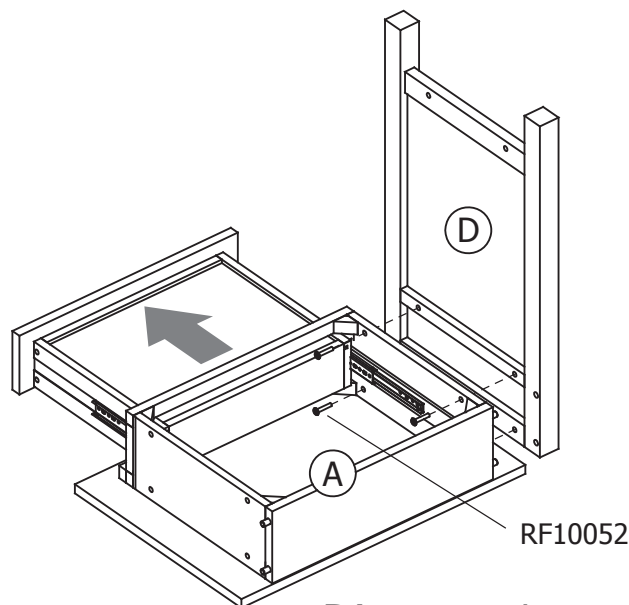


Diagram 1.

Step 2.

Attach Left Panel (C) and Bottom Shelf (B) into the Top Set (A) and Right Panel (D) using 8 Screws (RF10052) as per Diag. 2.

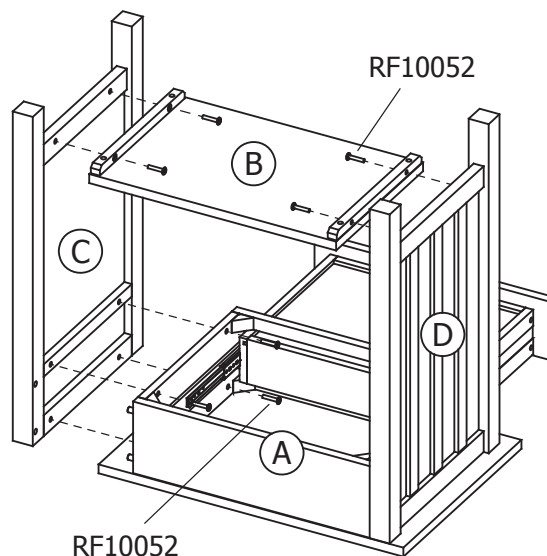


Diagram 2.

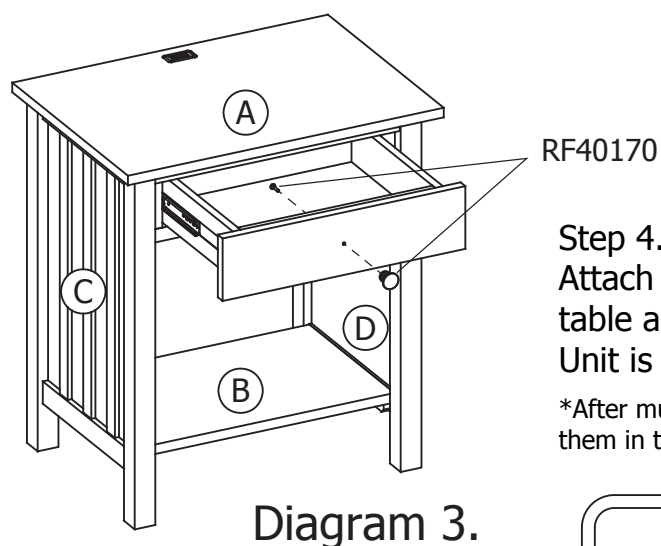


Diagram 3.


Step 3.

Upright the unit and attach Knob (RF40170) into the drawer as per Diag. 3.

Step 4.

Attach supplied AC cable from underneath the table and plug into a standard wall outlet. Unit is now ready to accept the supplied 3-in-1 cable.

*After multiple devices are charged simultaneously, please disconnect them in the reverse order.

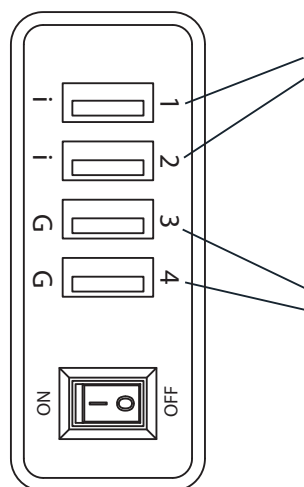

USB 1 & 2 PORTS

Fast charging ports for devices that require higher current, ideal for iPads and Android tablets, while also compatible with other mobile devices.

USB 3 & 4 PORTS

Standard USB ports, ideal for smartphones and other mobile devices.