


ASSEMBLY INSTRUCTIONS

Side Chair

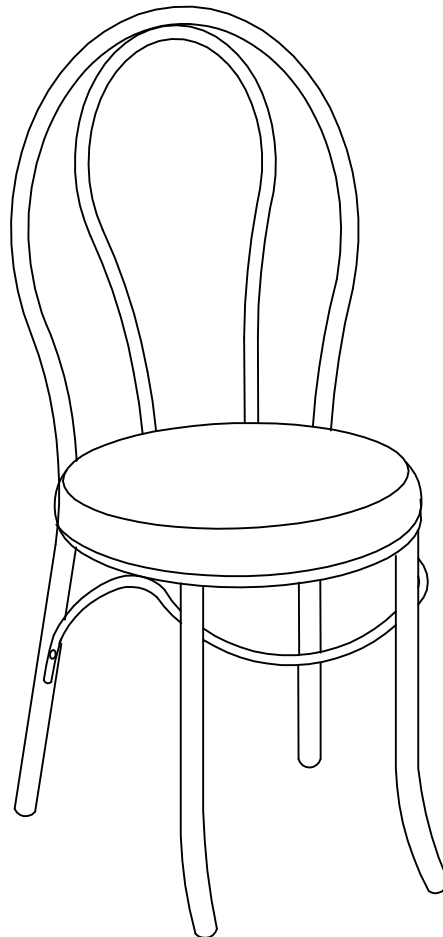

NOTE TO CUSTOMERS:

- For ease and speed of assembly we recommend that before you commence each step of the assembly that you identify all the parts required to complete that step.
- We recommend that where possible you allow sufficient space to assemble the item as close as possible to the place where it will be once assembled.
- For the protection of your furniture we recommend that the product is placed on protected surfaces during assembly to prevent any damage.
- During assembly do not to over tighten, as this may damage the product.
- Please ensure you retain all the product packaging until the item completely assembled.
- Please periodically check all fittings and re-tighten as necessary.
- Please never allow any liquids to remain on your furniture as absorption can cause the wood to warp or finish to de-laminate.
- It is recommended that this item should be assembled by two adults.


Part list :

			
A. Chair Back Qty: 2	B. Seat Frame Qty: 2	C. Leg Qty: 4	D. Side Rod(L) Qty: 2
			
D1. Side Rod(R) Qty: 2	E. Front Rod Qty: 2	F. Cushion Seat Qty: 2	

Hardware list :

			
15mm G. Bolt Qty: 14	20mm H. Bolt Qty: 12	35mm I. Bolt Qty: 4	J. Screw Qty: 8
			
K. Nut Qty: 4	L. Spring Washer Qty: 6	M. Flat Washer Qty: 22	N. Allen Wrench Qty: 1
			
			O. Allen Wrench Qty: 1

Step 1:

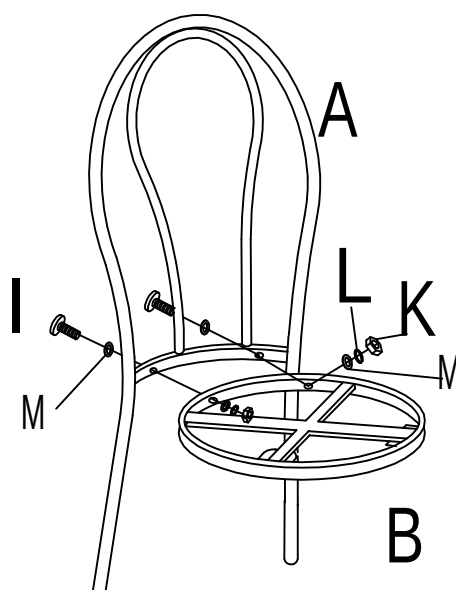


Item	Drawing	Qty
I		2x2
K		2x2
L		2x2
M		4x2

Attach seat frame (B) to chair back (A) using bolts (I) & spring washers (L) & flat washers (M) with nuts (K).

NOTE: Please do not tighten bolts (I) & nuts (K) until step 5 .

Step 2:

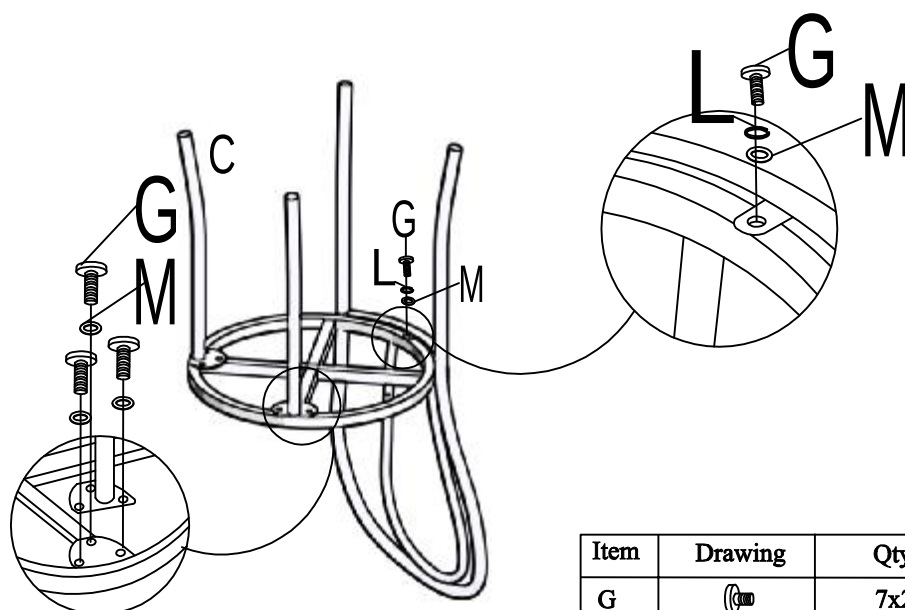


Item	Drawing	Qty
G		7x2
L		1x2
M		7x2

- 1) Attach seat frame (B) to chair back (A) using bolts (G) & spring washers (L) with flat washers (M) .
- 2) Assemble legs (C) to seat frame (B) using bolts (G) with flat washers (M).

NOTE: Please do not tighten bolts (G) until step 5.

Step 3:

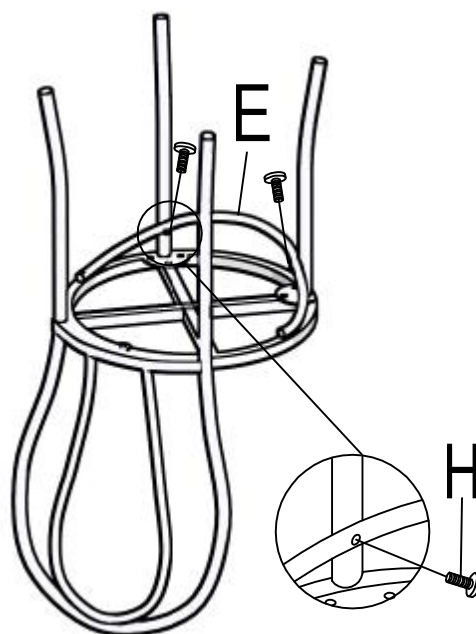


Item	Drawing	Qty
H		2x2

Attach the front rod (E) to legs (C) using bolts (H) .

NOTE: Please do not tighten bolts (H) until step 5.

Step 4:

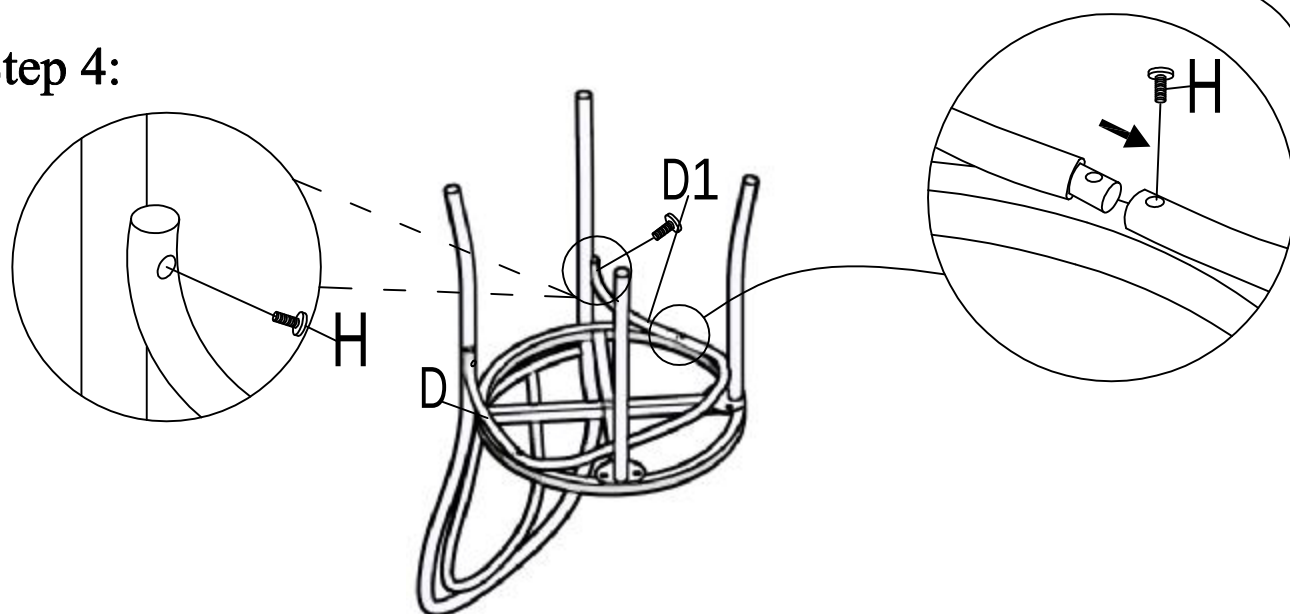


Item	Drawing	Qty
H		4x2

- 1). Insert the side rod (D) into the end of front rod (E), then assemble side rod (D) to seat frame (B) and chair back using bolts (H) .
- 2). Repeat above step with the other side rod (D1) as drawing shown above.

NOTE: Please do not tighten bolts (H) until step 5.

Step 5:

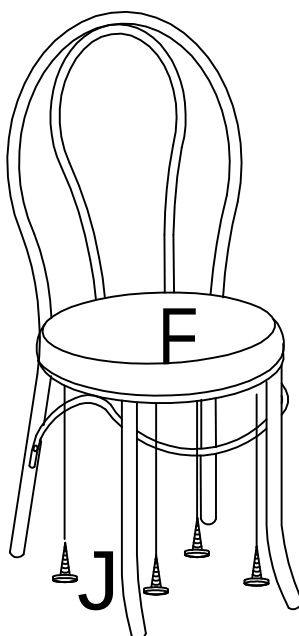

Item	Drawing	Qty
J		4x2

Place the chair on the floor to check if it is stable before tightening bolts (G)&(H)&(I) and screws(J).

Warning:

- 1). Do not stand on this chair or use it as a ladder.
- 2). Do not use this chair unless all bolts and screws are assembled and tightened.
- 3). Periodically check all hardware to ensure they are not loose.
- 4).Maximum load capacity is: 200LBS.