

VersaStrip




The Most Versatile LED Strip Light Available!

**Best 8' Strip light,
ships in 4' box**



2x48" VersaStrip
Model #: 54599142
Part #: ST-4-55-840-MV-D

VersaStrip



ETI ADVANTAGE



✓ One Product = Many Mounting Solutions!

- 4' Single strips – mounted individually
- 2 x 4' side by side – great for low/high bay installations
- 8' Strip – single or continuous strip up to 40'
- Grid layout – using optional brackets

✓ Future proofed! Replaceable light engine & driver

- ✓ Value priced 0-10V photo sensor
- ✓ Tandem and parallel mounting brackets included
- ✓ Converts to 11,000 lumen controllable warehouse high bay fixture

“Versa”-Tile Mounting Options And Locations!

- Flush or suspended mounting
- Wall or ceiling installations
- Grocery, retail, office, factory and warehouse installations - superb high/low bay or aisle lighting solution!
- Tandem and parallel mounting brackets included

Power


- 11,000 lumen output (5500 LM/4' strip)
- 120-277V

Control


- Optional motion control with 3 time settings
- 0-10V dimming

Robust, Intelligent Construction

- Shatterproof PMMA lens will not discolor over time
- Industrial grade powder coated housing
- Extra wire length included plus quick-connects for easy installation
- UL damp location rated

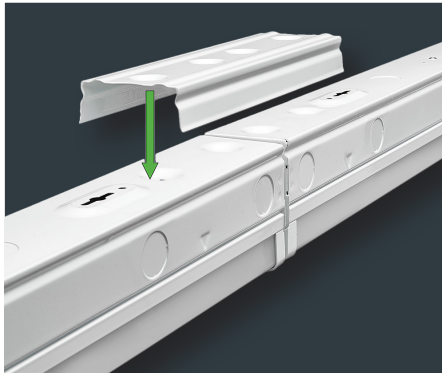

Joiner bracket snaps into place for 8 foot continuous mounting

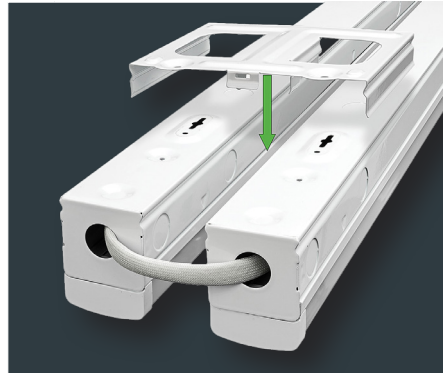

Brackets snap into place for tandem mounting



Snap on wireway covers for optional wiring

PART NUMBER GUIDE

CATEGORY	SIZE	WATTS	CRI/CCT	VOLTAGE	DIMMABILITY	UPGRADE FEATURE
ST	4	100	840	MV	D	N/A

PRODUCT/SKU DETAILS


GENERAL SPECIFICATIONS:

Voltage	120-277VAC	Frequency	50/60 Hz.	CRI	80
Power Factor	>.90	THD	< 20%	Rating	cULus Damp
Temperature	-4°F to +113°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited


ORDERING GUIDE

Part #	Model #	Description	Replaces	Watts	Lumens	LPW	CCT	Product Dim.	Case Pack
ST-4-55-840-MV-D	54598142	Dual 48" VersaStrip - 0-10V Dim.	400	100	11,000	110	4000K	48.03 x 4.17 x 2.48	2
Accessories									
OS-ST-01	90600647	Motion Sensor	N/A	N/A	N/A	N/A	N/A	4.65 x 1.50 x 2.99	10
MC031V-D	70201101	Step Dimming External Motion Sensor	N/A	N/A	N/A	N/A	N/A	N/A	50
BR-ST-LL-01	90600648	L Linking Bracket	N/A	N/A	N/A	N/A	N/A	7.28 x 6.69 x 0.93	10
BR-ST-TL-01	90600649	T Linking Bracket	N/A	N/A	N/A	N/A	N/A	11.32 x 7.28 x 0.93	10
BR-ST-PL-01	90600650	Parallel Linking Bracket	N/A	N/A	N/A	N/A	N/A	9.65 x 4.90 x 0.93	10
BR-ST-CL-02	90600737	Continuous Linking Bracket	N/A	N/A	N/A	N/A	N/A	6 x 2.90 x 1.4	10
BR-ST-CL-01	90600651	Cross Linking Bracket	N/A	N/A	N/A	N/A	N/A	11.73 x 11.32 x 0.93	10
BR-ST-AL-01	90600652	Adjustable Linking Bracket	N/A	N/A	N/A	N/A	N/A	9.84 x 2.22 x 0.93	10


OPTIONAL BRACKETS




X BRACKET



MULTI-ANGLE ADJUSTABLE





T BRACKET




L BRACKET

QUICK CONNECTORS ALLOW FOR EASY INSTALLATION


OPTIONAL BRACKETS

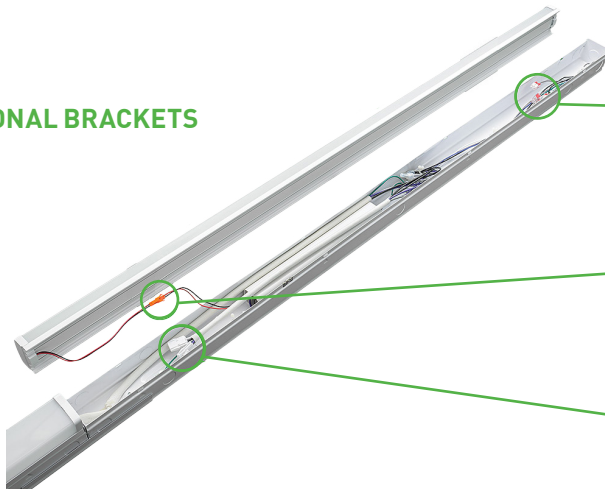

**Multi-voltage wiring
with quick connectors**



**Lamp detaches for
easy installation**



**Link additional fixtures
easily with installed
wiring harness**

PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Inner Carton Weight	Master Carton Dimensions	Shipper Carton Weight	Shipper Carton Qty.
ST-4-55-840-MV-D	54263143	849489060125	50849489060137	49.49 x 6.18 x 5.35	N/A	50.08 x 11.34 x 6.85	7.3	2
Accessories								
OS-ST-01	90600647	849489060637	50849489060632	35.51 x 1.81 x 3.70	N/A	10.87 x 9.84 x 4.41	2.9	10
MC031V-D	70201101	NA	NA	NA	NA	NA		50
BR-ST-LL-01	90600648	849489060026	50849489060021	N/A	N/A	14.37 x 6.06 x 8.03	3.7	10
BR-ST-TL-01	90600649	849489060033	50849489060038	N/A	N/A	23.35 x 6.06 x 8.07	5.2	10
BR-ST-PL-01	90600650	849489060040	50849489060045	N/A	N/A	20.43 x 20.12 x 5.71	11.5	10
BR-ST-CL-02	90600737	849489060057	50849489060052	N/A	N/A	23.35 x 6.06 x 8.07	7.1	10
BR-ST-CL-01	90600651	849489060057	50849489060052	N/A	N/A	23.35 x 6.06 x 8.07	7.1	10
BR-ST-AL-01	90600652	849489060064	50849489060069	N/A	N/A	14.37 x 6.06 x 8.03	3.2	10

DIMENSIONS

