


8240WL-01BK/GD-US

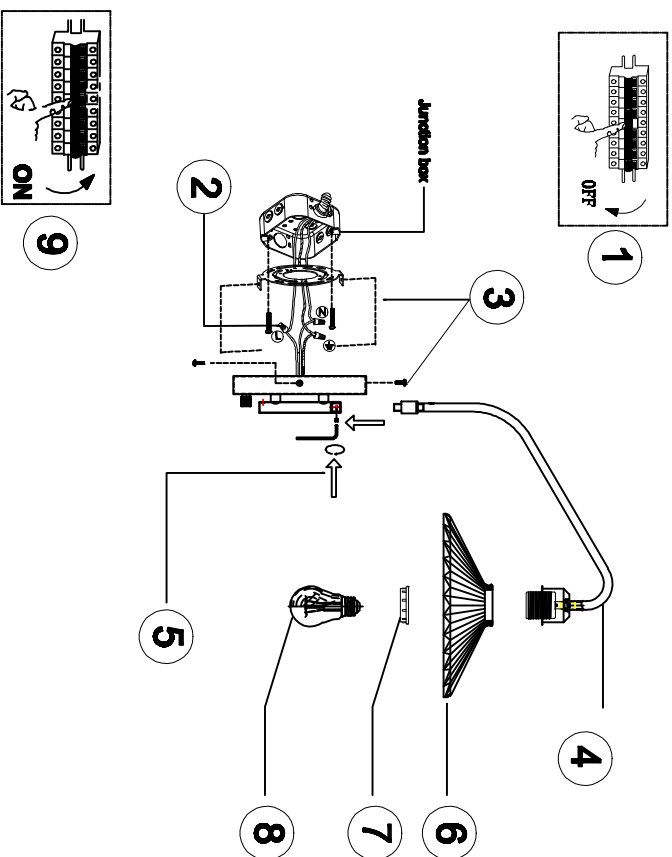

1 : Shut down the power.

2 : Screw on the terminal cap in the correct way

3 : Screw the mounting plate to the junction box Then fix the screws on both sides of the canopy.

4 : Insert the elbow pipe and the lamp head into the middle straight pipe.


5 : Use an internal hex socket wrench to tighten the M4 internal hex screws on the elbow pipe, and adjust the direction properly.

6 : Use an internal hex socket wrench to tighten the M4 internal hex screws on the elbow pipe, and adjust the direction properly.

7 : Fasten the lampshade tightly with the lamp collar..

8 : Turn the E26 bulb into the lamp socket.

9 : Turn on the main power supply, and the lights will come on.

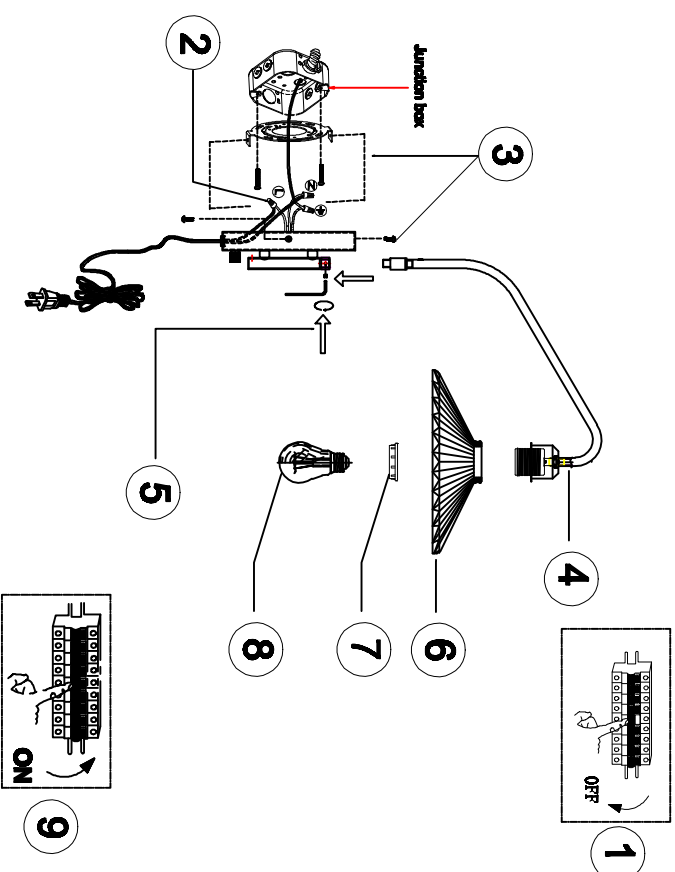

9