




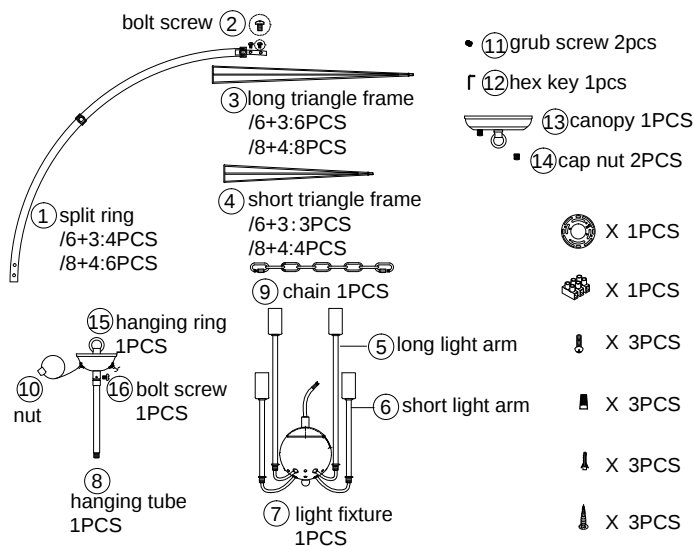


Note: male A should connect with female A, male B should connect with female B (C with C, D with D).

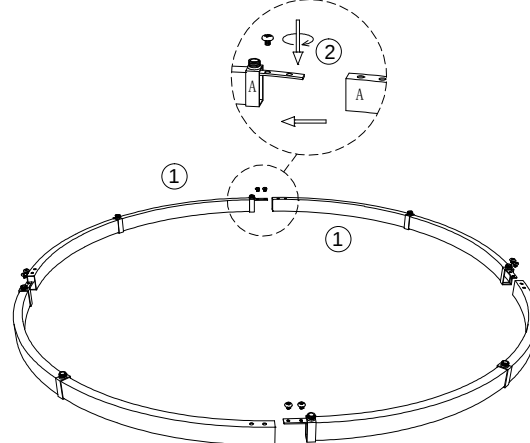


1. Assemble the ring ①, put the male and female connector together, lock it with screw ②.

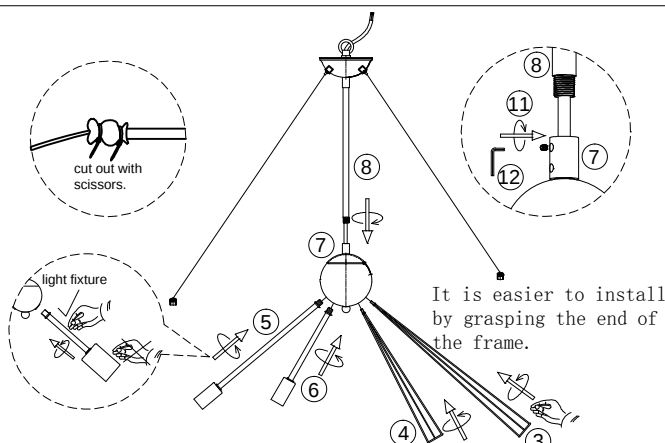


2. Rotate the light arm ⑤ and light arm ⑥ in the opposite direction for ⑩ circles, and then install it to the ball ⑦.
(note: please grasping the tube not the light cup when install the light arms!!!)
3. Rotate to install the frame ③ and frame ④ to the ball ⑦.
4. Let the wire go through the hanging tube ⑧, rotate to install to the ball ⑦, fix it with grub screw ⑪ by rotate hex key ⑫.

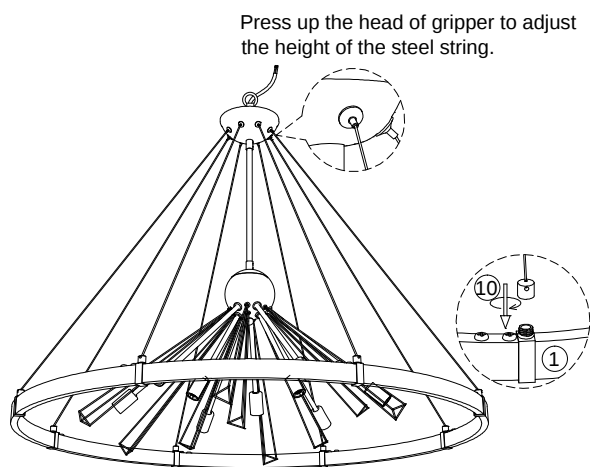

5. Rotate the nuts ⑩ to the threads of ring ①, press the head of gripper to adjust the length of the steel wire to balance the fixture.

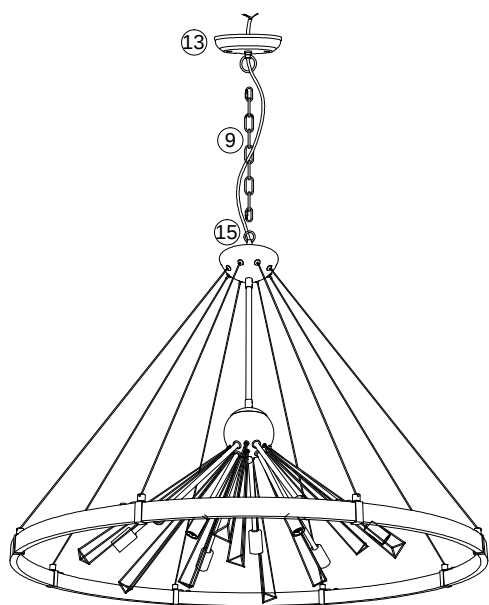

6. Hang the fixture to the canopy ⑬ with chain ⑨, let the wire go through the chain ⑨ and canopy ⑬.

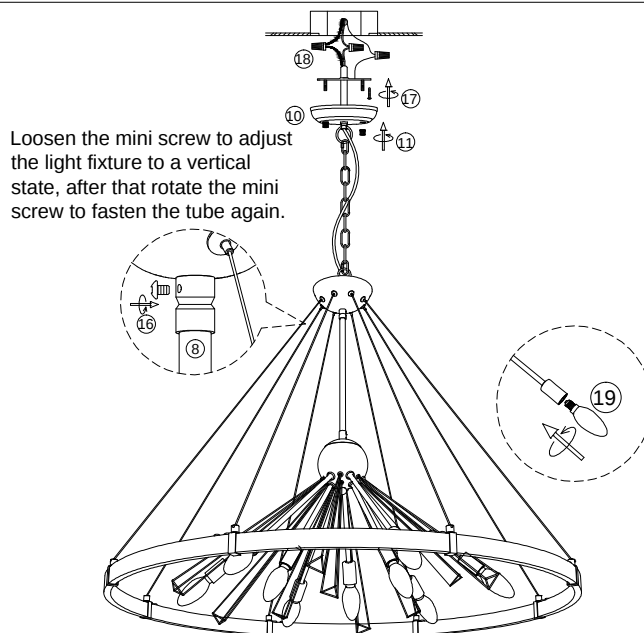

7. Install the bracket to the ceiling junction box with screw ⑰.
8. Connect the wire to your home line with cap connector ⑱.
9. Install the fixture to the bracket with cap nut ⑰.
10. Install the bulb ⑲.

D0180-6+3/D0180-8+4

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !