




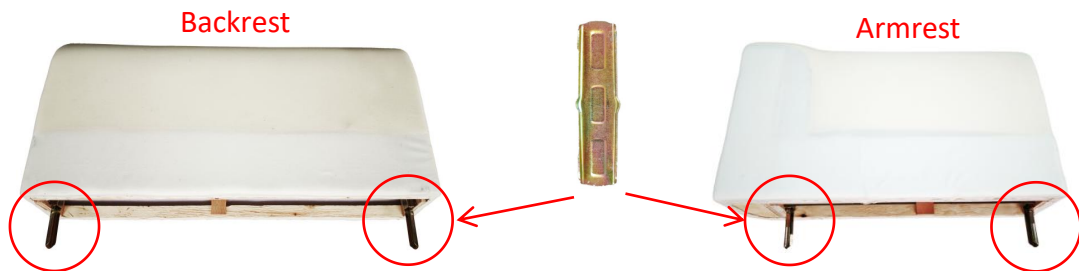


Installation 145-2


To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List			
	Seat	1		Backrest	1
	Armrest	1		Seat cushion	1
	Back cushion	1		Sofa cover	1
	Inserted rod	4		Legs	4
	Connecting buckle	1		8x20mm screw	2

1 As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.




2

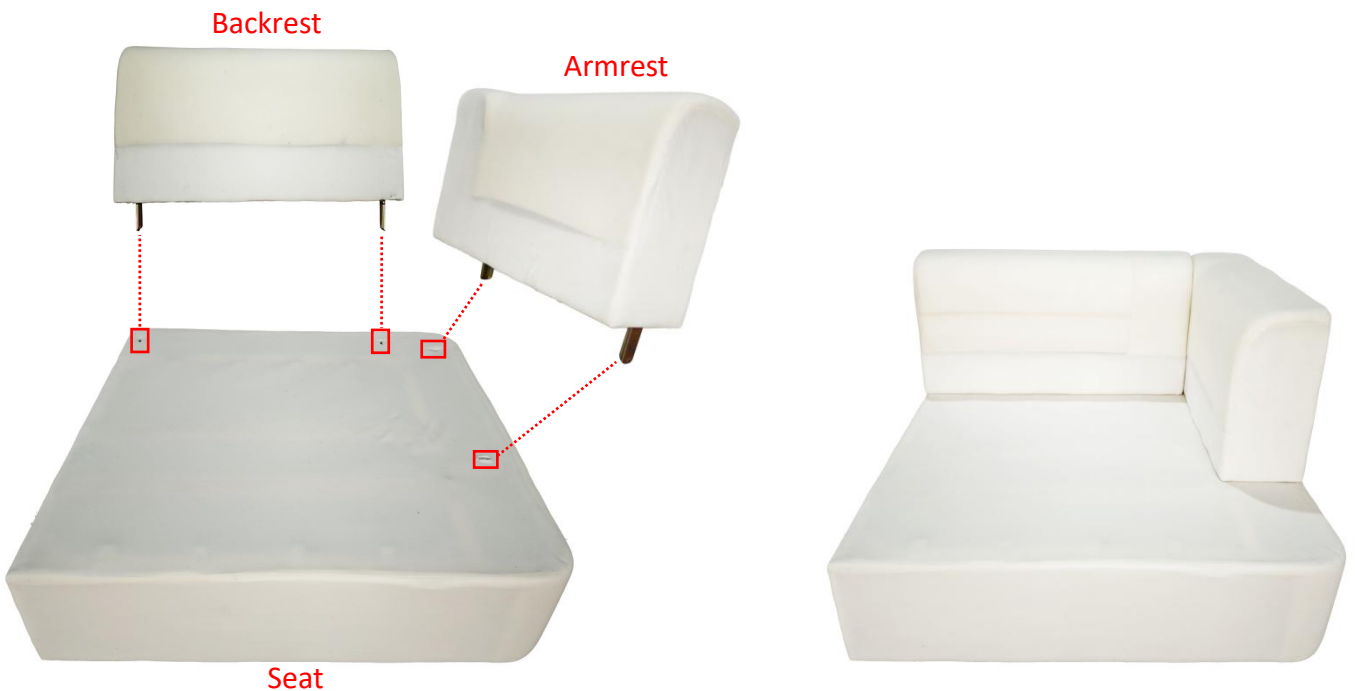

3 Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.

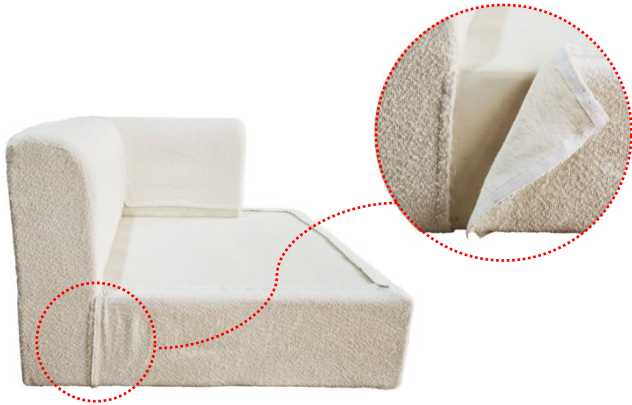

4




Secure the legs of the sofa.



5 Place the seat cushion and back cushion.

Note that the side with the zipper on the cushion should face the back.

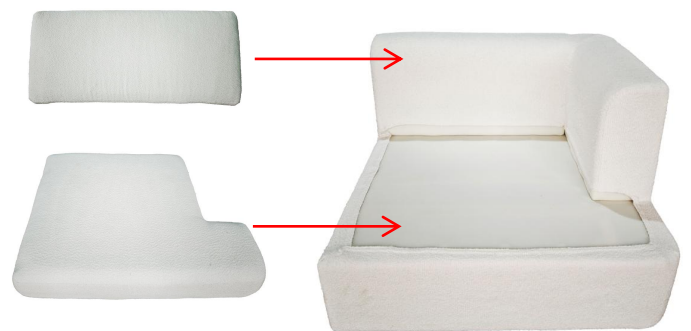

The seat cushion can be attached using Velcro.



6 Apply the connection buckles to connect the seats together (or not, it's totally up to users).

