

Buy it for looks. Buy it for life.®

DESCRIPTION

- Metal construction with a chrome plated or brushed chrome finish.
- Includes non-metalic showerhead, arm flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) Max CARTRIDGE
- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS


 Third party certified to meet CSA B-125, ASSE 1016, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications





Models: TL183, TL183BC (Bulk Packed 12 per carton)

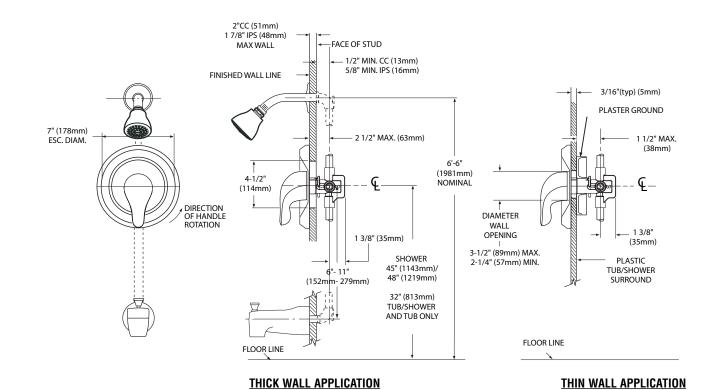

CRITICAL DIMENSIONS

(DO NOT SCALE)