


F903L-A : Tub & Shower Mixer with Massage Hand Held Shower Set

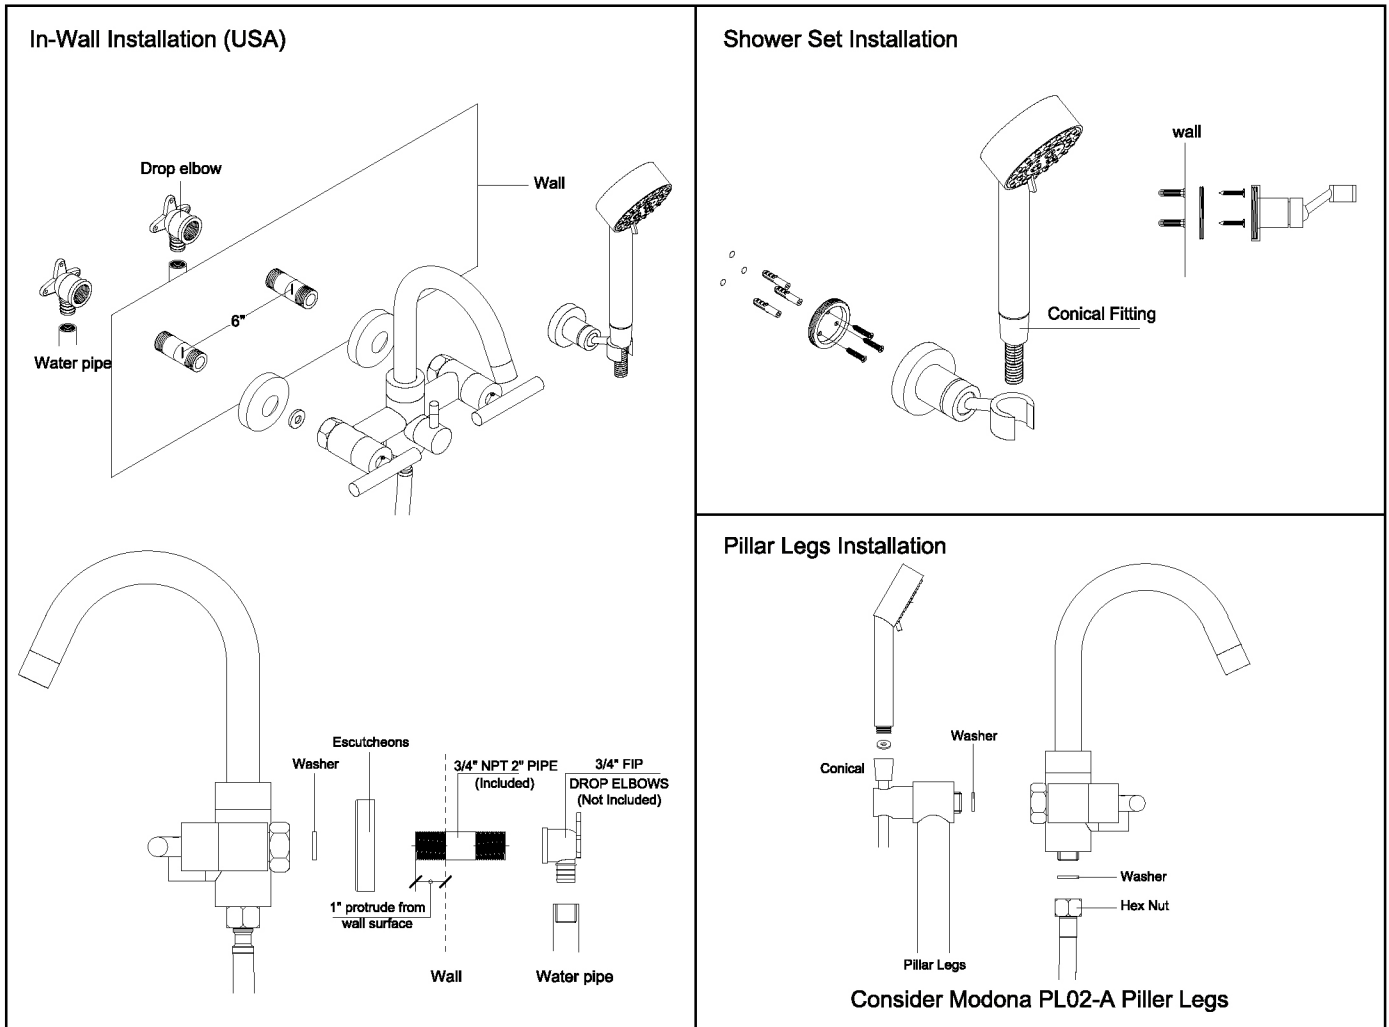

In-Wall Installation (USA):

1. Plumb Hot and Cold $\frac{3}{4}$ " NPT 2" PIPES (Included) to protrude 1" from FINISHED wall surface, 6" APART.
(NOTE: The $\frac{3}{4}$ " NPT 2" PIPES Should be installed to $\frac{3}{4}$ " FIP Brass Drop Elbows).
2. Slip Escutcheons over $\frac{3}{4}$ " NPT 2" PIPE before attaching MIXER.
3. Attach and Tighten Mixers $\frac{3}{4}$ " Female fittings to $\frac{3}{4}$ " NPT 2" Pipe Male fittings. Make sure washers are inserted into Mixer fitting BEFORE attaching to Pipes. As the Pipes are NPT (Tapered) the installation should be water tight. Use included Teflon Tap if any leaks detected.
4. Adjust Escutcheons as required.
5. Discard the S-Pipes as these are for European Installation ONLY (1/2" IPS).
6. Using Base of Shower Wall Mount, mark screw locations.
7. Drill guide holes into wall and insert Screw Anchors.
8. Attach Shower Wall Mount BASE to wall. Screw Shower Wall Mount onto Base.
9. Insert Washers into BOTH Shower Hose Fittings.
10. Attach Hand Shower to Conical End of Shower Hose.
11. Attach Shower Hose Hex Nut to end of Mixer.
13. To tighten the arm, turn the large nut on front of Shower Mount Clockwise.

Pillar Legs Installation:

1. Make sure Pillar Legs are exactly 6" apart (center fittings).
2. Attach Teflon Tape to Pillar Legs $\frac{3}{4}$ " fittings.
3. Attach and Tighten Mixer's $\frac{3}{4}$ " Female fittings to $\frac{3}{4}$ " Pillar Leg Male fittings. Make sure washers are inserted into Mixer fittings BEFORE attaching to Pillar Legs.
4. Discard Escutcheons, S-Pipes, and $\frac{3}{4}$ " NPT 2" Pipes as these are not required for Pillar Legs.
5. Insert Washers into BOTH Shower Hose Fittings.
6. Attach Hand Shower to Conical End of Shower Hose.
7. Attach Shower Hose Hex Nut to end of Mixer.
8. Hand Shower Sits in Shower Holder on Pillar Legs.