


Lamp installation instructions and icons

Note 1. Before installation, please check whether the parts package is complete. Whether the lamps are intact.

2. Cut off the main wire before installation. Before wiring.
3. Install the lamp body first. Then install the power supply.
4. Installation and maintenance must be carried out by professional and technical personnel.

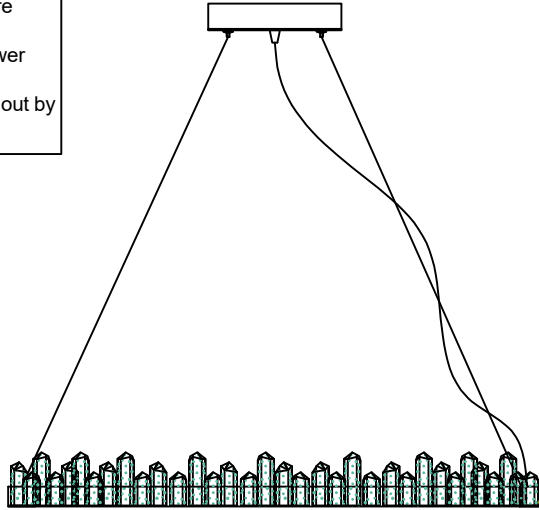

Number of magnets:
400 10 each
600 each with 16
800 21 pieces each
1000 27 each
1200 35 pieces each

Number of oblique inserts:
400 10 each
600 13 each
800 each 18
1000 25 pieces each

Number of magnets:
600*300 16 pcs each
800*300 20 pcs each
1000*300 24 pcs each

Fix the hanging plate in the wall according to the general installation diagram of the hanging plate.

Installation step one:

Connect the lamp body cord and the power cord, and lock the ceiling to the ceiling.

Installation step two:

Put the diamond crystal in the hardware frame and power on and try to brighten it.

Installation step three:

Overall lighting diagram

① 假天花
电钻
假天花
膨胀螺丝
锤子

1. Drill holes according to the hole position of the hanging board at the installation place.
2. Use a hammer to drive the expansion screw plug into the drilled hole for use.

② 假天花
挂板
自攻螺丝
螺丝刀

1. Use self-tapping screws to fix the hanging board in the ceiling, and use a screwdriver to lock the hanging board.

③ 假天花
老虎钳
吸顶盘

1. Connect the wires of the room and the positive and negative poles of the lamps respectively, connect the wires with the wiring cap, and tighten the wiring cap with a vise to prevent the wires from falling off.

④ 假天花

1. Align the side holes of the ceiling plate with the holes of the hanging plate, use a Phillips screwdriver to connect the hanging plate and the ceiling plate, and then lock them with a screwdriver.

Precautions for maintenance: When maintaining the lamp, be sure to cut off the power supply to prevent electric shock

1. In order to use this product efficiently and safely, please check and clean the lamps regularly (make sure that the connecting parts of the lamp body are Firmness, the embedded parts and load-bearing hooks and chains in the ceiling can prevent aging without being noticed. Cause an accident)
2. During the cleaning process, if the light source is replaced, it is recommended to choose a brand-name product with good quality and long life to avoid the trouble of replacing the light source.
3. When cleaning the lamp, do not rotate the lamp body to avoid loosening of the external screws of the lamp body connection and cause unsafe accidents.
4. When wiping the beads, it is recommended to use a warm cloth dipped in detergent to dilute the water, and gently wipe down on the surface of the crystal beads (do not pinch the beads when wiping Pull down to avoid breaking the beads.) If you remove all the crystal beads for cleaning, pay attention to the balance of the lamp body when removing the beads. The left and right sides should be used for disassembly, otherwise it will cause the lamp body to tilt and cause the lamp body to be deformed.
5. When wiping the bracket of the lamp body, use a soft cloth not to be dampened with water, especially alcohol, gasoline, etc. If the buckle is rusty or the crystal bead is missing, it should be replaced in time)