




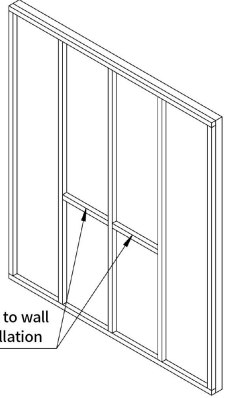
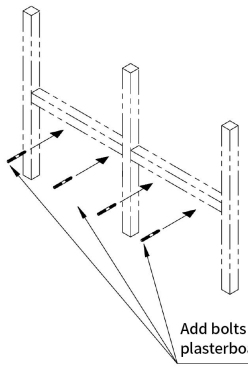
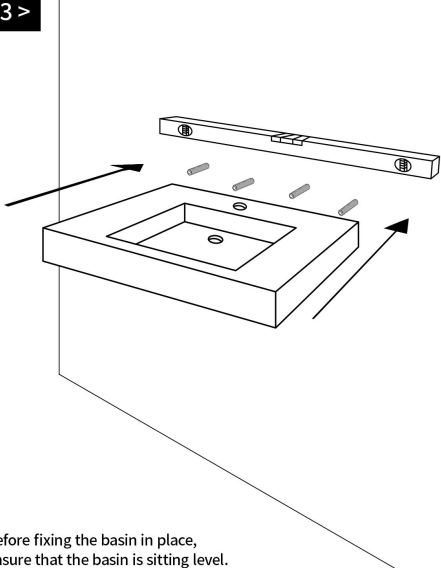
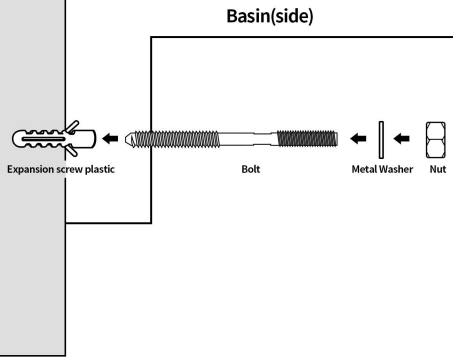


Basin installation Instructions

Model: FS140-900 (LTK)

Components:				
 <p>Basin*1</p>	 <p>Bolt*4</p>	 <p>Nut*4</p>	 <p>Metal Washer*4</p>	 <p>Expansion screw plastic*4</p>
<p>< 1 ></p>  <p>Add battens to wall before installation</p> <p>Note: Product can be mounted on both concrete or timber-framed walls.</p>		<p>< 2 ></p>  <p>Add bolts to plasterboard</p> <p>! Important! Before installing, ensure there is sufficient timber framing in the wall to securely fasten your basin to.</p>		
<p>< 3 ></p>  <p>Before fixing the basin in place, ensure that the basin is sitting level.</p>		<p>< 4 ></p>  <p>Basin(side)</p> <p>Expansion screw plastic Bolt Metal Washer Nut</p> <p>Screw a metal nut onto each fixing bolt to secure the basin. Caution: do not over tighten as this may damage the basin/top.</p>		