
LOS FLEXI

CRAFTING YOUR HOME STORY

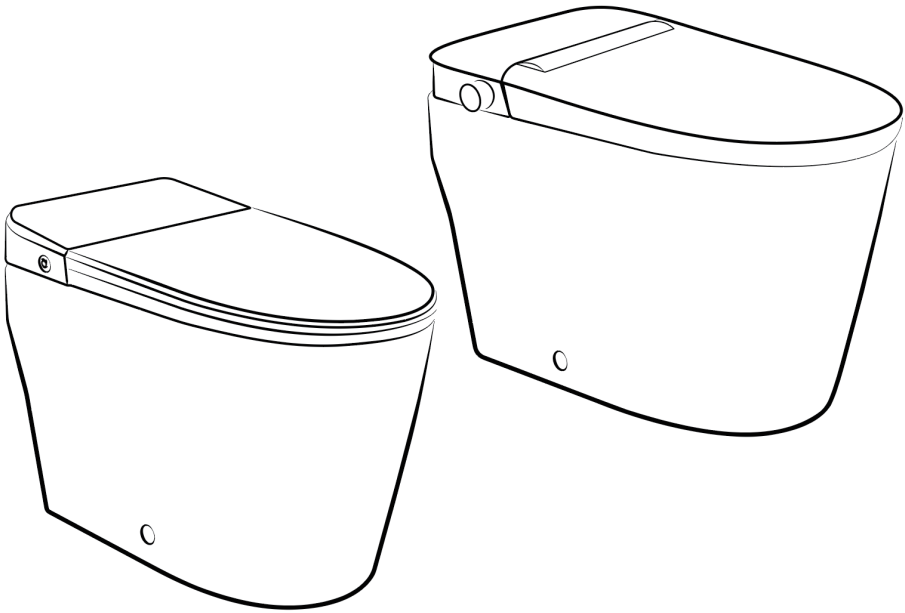

Non-Electric Toilet

INSTALLATION & USER GUIDE

cs@losflexi.com www.losflexi.com (+1) 662-502-5099

SAFETY

Before using the product, please read the following safety instructions carefully. Pay attention to the following safety warnings.

We will not be responsible for any loss due to violation of either requirement below.

- Qualification of installation person: The product should be installed by a specially trained qualified plumber.
- Before installing the product, please read the safety instructions right below and those in other parts of this manual. Please install the product as instructed in this manual. We will not be responsible for any adverse consequence due to a change of the installation method.

SYMBOLS DESCRIPTION

Symbol Description

 Inspect tightness

 Caution! A low risk possibly causing a light injury.

 Kind reminder

CAUTION!

Please avoid faults or damage of the product due to misoperation.

- Do not use industrial water, circulating water, sea water or waste water as the water source of the product. Please use a water source meeting the hygiene requirements for domestic drinking water.
- When installing the product, please abide by all the local regulations on water supply and drainage, and buildings to avoid safety hazards.
- When using the product, make sure the water supply pressure and the water supply flow are 0.1MPa to 0.86MPa (15PSI to 125PSI) and equal to or more than 9L/min(2.4gal/min), respectively, to ensure thorough flushing.
- Make sure that the water temperature is 39.2°F to 95°F and that the bathroom temperature is above 39.2°F.
- Do not bend, squeeze or wind the water supply pipe excessively.
- Do not use benzene, paint thinner, cleaning powder or nylon brush but a thinned neutral detergent to clean the product.
- Do not use an old hose repeatedly. Please use the new hose provided with the product.
- Do not strike the ceramic violently.
- Do not put the product upside down.
- Before installation, water-proof treatment should be done for the bathroom's floor and walls.
- To avoid product surface scratches, please remove the electrostatic film on the product after its installation.

PRIOR TO INSTALLATION:

CAUTION!

Please avoid faults or damage of the product due to misoperation.


- The product is made of ceramic. Handle it gently in installation. Do not fix the ceramic with cement, otherwise the product will tend to get damaged; do not lock the nuts too tightly, otherwise the product may get damaged or crack.
- After installation, do a water supply test first.
- Leaning on the top cover when using the product may damage it.
- When moving or installing the product, hold its body with hands. If only its top cover and seat are held, they may separate from the body and cause injuries.
- Keep the product from direct sunlight to avoid its discoloration.
- Do not put any article tending to make the product clogged, such as newspaper, paper diaper or sanitary pad, into the product.

KIND REMINDER!


- All dimensions are nominal! Be sure to measure you toilet prior to installation.
- Observe all plumbing and building codes in accordance with your state and local requirements.
- Before installation, please ensure all protective foam pieces are removed from the rear interior of the toilet.
- The product has taken a water supply test before delivery. Therefore, it is normal that a few water drops flow out of it when it is being taken out of the packing box.

PACKAGE INCLUDED

- LFNE1



Non Electric Toilet




Installation Template



Flange



Wax Ring




Floor Mounting Kit




Installation & User Guide

- LFNE2



Non Electric Bidet Toilet



Installation Template




Flange



Water Supply Hose



Wax Ring




Floor Mounting Kit



Installation & User Guide


MODEL: LFNE1

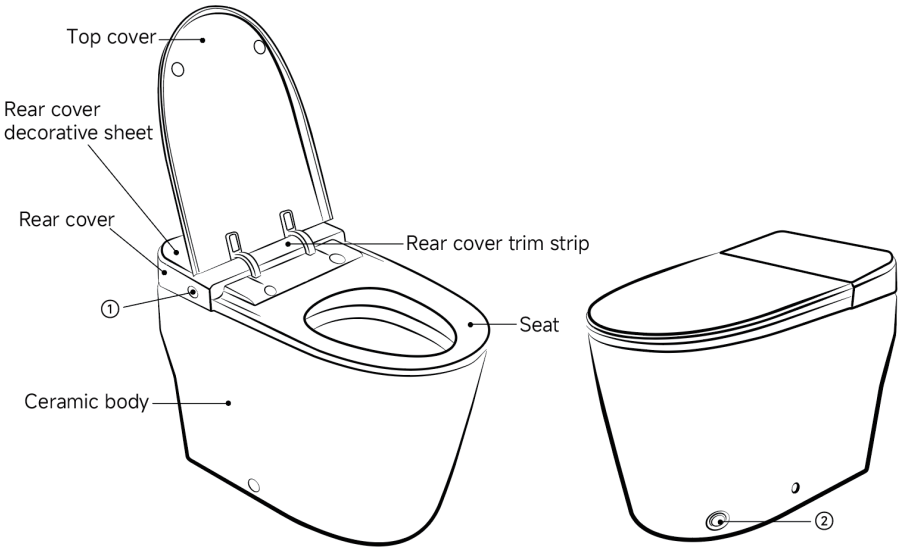

OPERATION BUTTON

Button	Symbol	Function	Operation	Notes
①		Flushing	Press the flush button.	/
②			Kick the flush button on the toilet body.	A short kick may not provide sufficient flushing power. A longer kick is required for continuous flushing.


MODEL: LFNE2

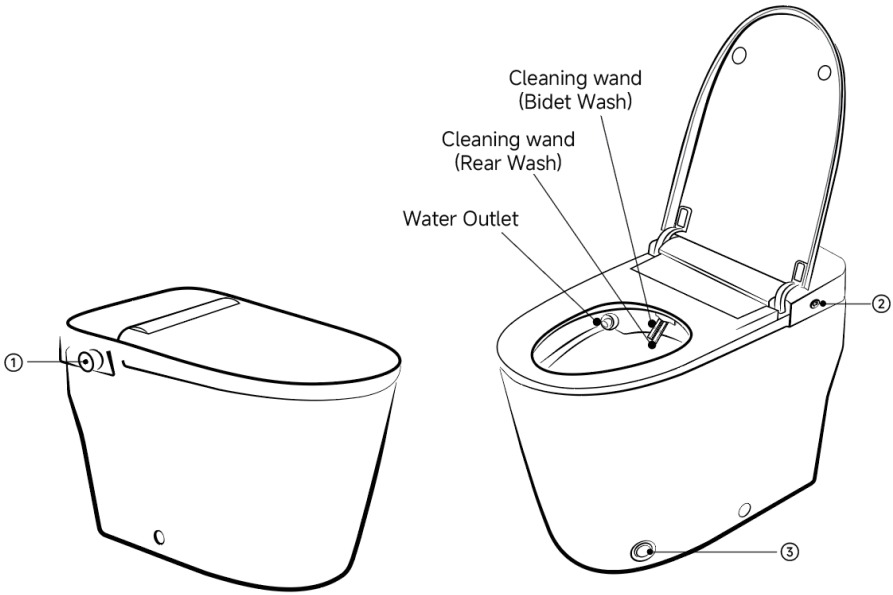

OPERATION KNOB

Knob	Symbol	Function	Operation	Notes
①		Feminine Wash	Turn the knob forward to activate the feminine washing.	Both feminine and rear washes use non-heated, ambient water. The water flow intensity is preset and cannot be modified. To suspend or stop the water flow, simply turn the control knob to the neutral (middle) position.
		Rear Wash	Turn the knob backward for rear washing.	
②		Flushing	Press the flush button.	/
③			Kick the flush button on the toilet body.	A short kick may not provide sufficient flushing power. A longer kick is required for continuous flushing.

REQUIRED TOOLS


Drill


Sillicone


Teflon Tape


Knife


Pen



Wrench


Screw Driver



Measure Tape

TOILET INSTALLATION


1. Before Installation
   - Ensure that floor and wall tiling is complete, and that the drain pipe and water supply line are pre-installed.
   - Reserve the installation position according to the dimensions given in the figure below to ensure normal use of the water supply pipe. (symbols * refer to the recommended dimensions)
   - Ensure the rough-in distance matches the product you purchased.

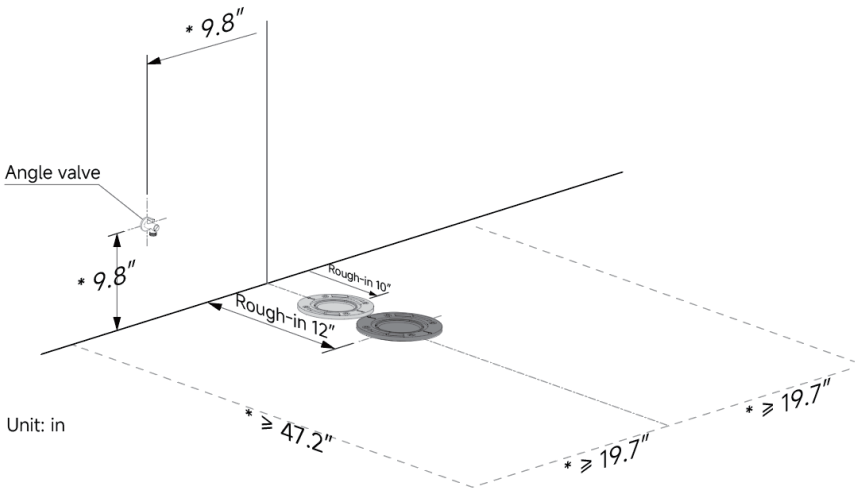

- Open the faucet and run water for 10 seconds to flush out any debris from the water line.

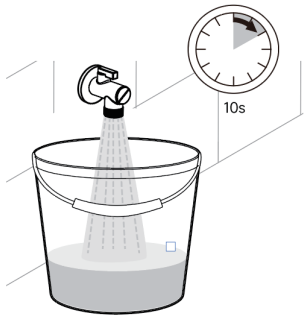


2. Position the included installation template.
   - Align the template with the drain outlet.
   - Mark the mounting holes and extend the dashed reference lines on both sides of the template to ensure proper toilet alignment.
   - Remove the installation template after marking.

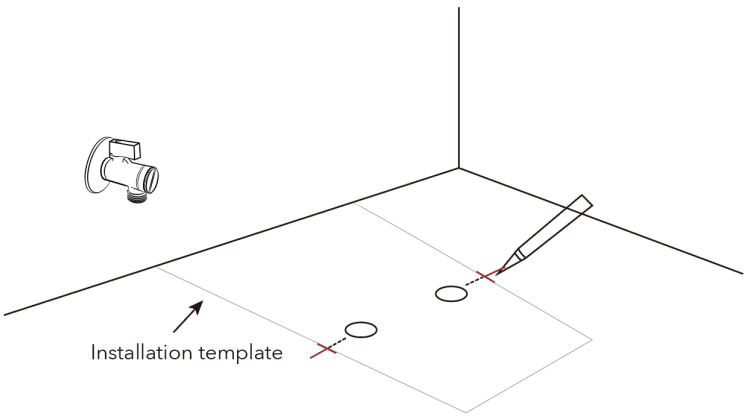


3. Install the toilet flange.


- Place the flange on the toilet outlet.
- Mark the holes on the floor with a marker, then remove the flange.

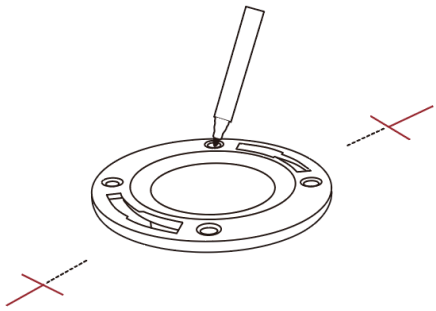

- Plug the expansion anchors into the holes.
- Align the flange with the holes.
- Place the screws into the holes and secure them with a drill.

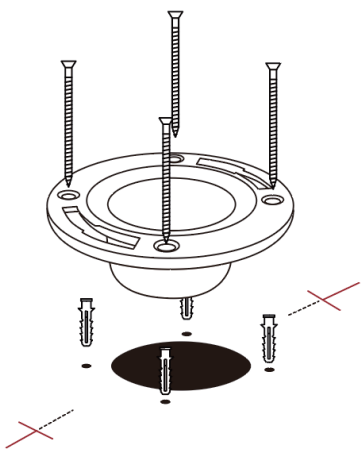


4. Install the floor mounting brackets.
   - Insert the T-bolts and and L-shaped mounting brackets into the flange slots.
   - Secure the washers and nuts onto the T-bolts to hold the brackets in place.

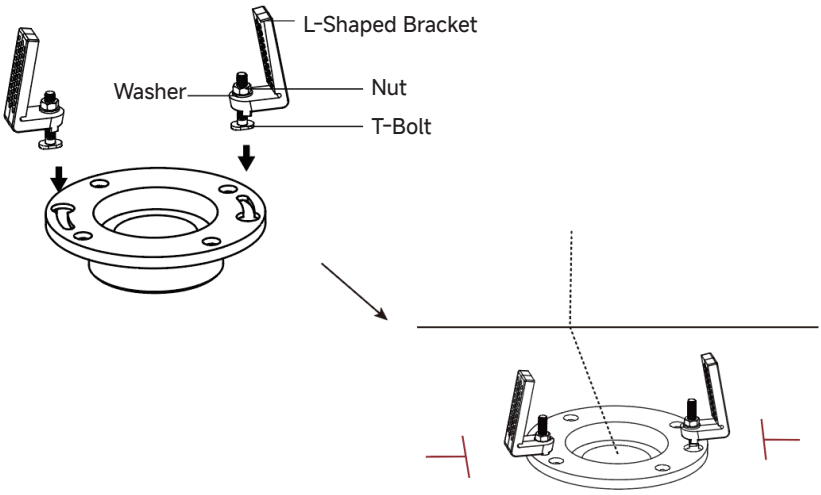


Note: Ensure the L-shaped brackets are aligned with the extended reference lines.


5. Connect the 7/8" end of the water supply hose to the toilet fill valve.

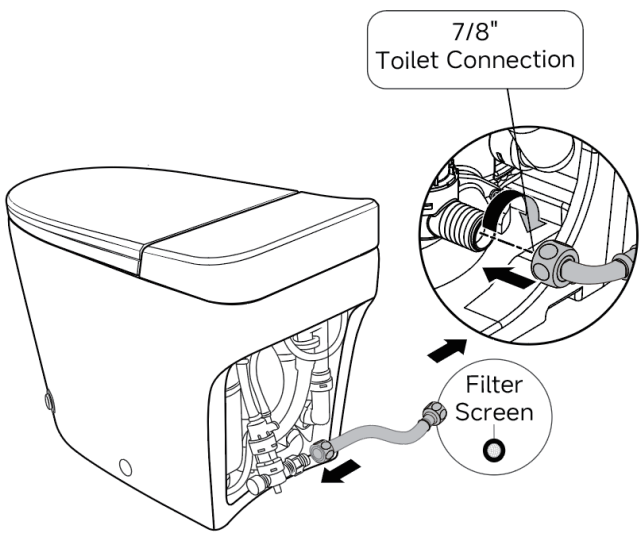


6. Install the wax seal over the toilet drain outlet and press firmly to secure it in place.

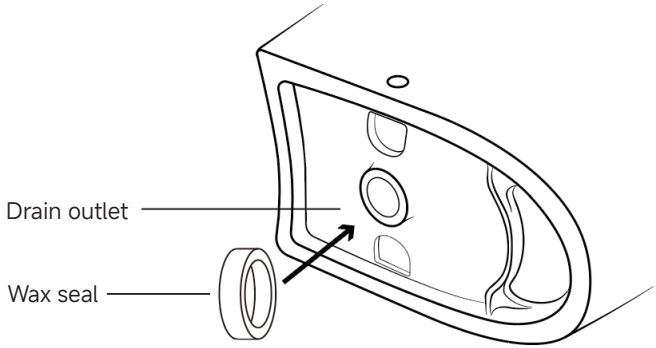


7. Set the toilet onto the flange and compress the wax seal.

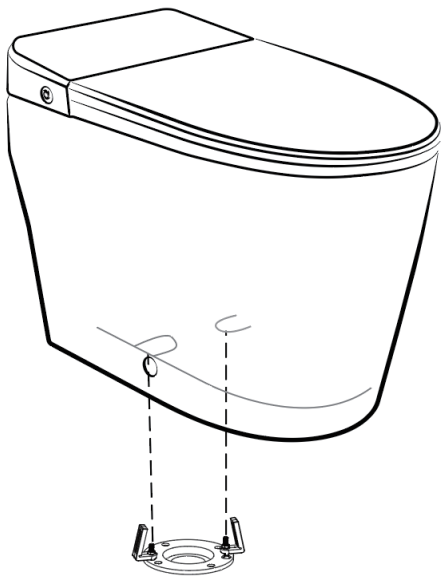


8. Attach the supply hose to the T-valve. Do not overtighten.

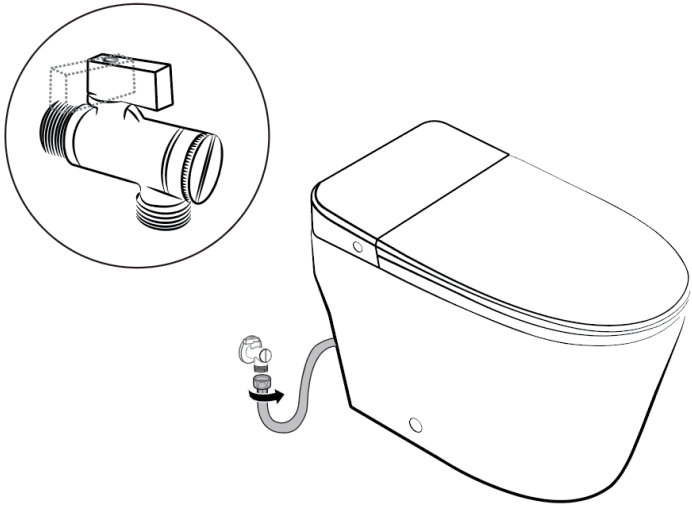

9. Install the decorative side covers using the provided hardware and washers. Press the caps into place to conceal the fasteners. Turn on the water supply and check for leaks.

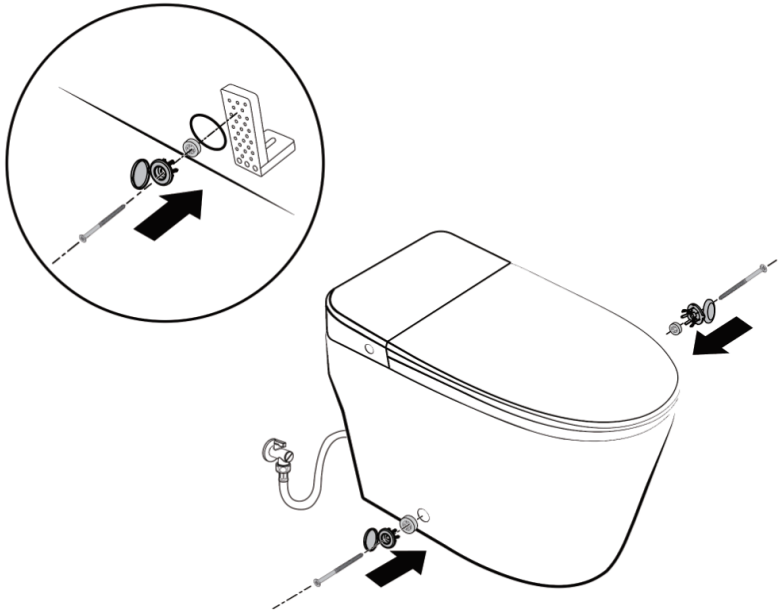


TEST BEFORE USING

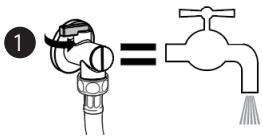


2

Open the tee and press the flush button to test for any leakage.

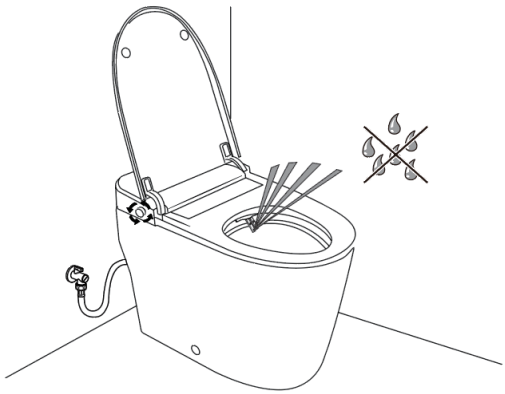


Make the product stand for 24 hours before use.

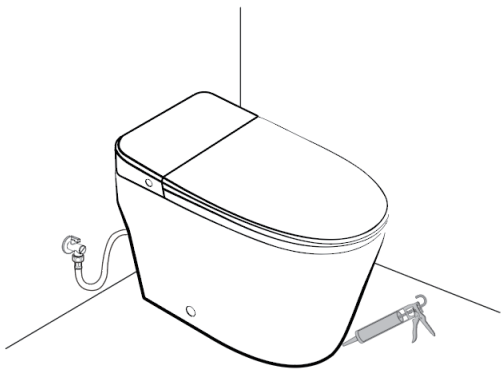

CLEAN & MAINTENANCE


FILTER CLEANING

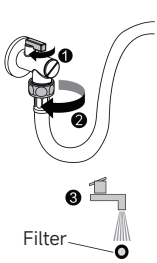

The filter needs to be cleaned at regular intervals. If the product fails in water supply, has a water supply pressure smaller than ordinary time or cannot work normally, please clean the filter first.

In cleaning, make sure the water supply switch is off; after cleaning, mount the filter back and inspect and make sure there's no water leakage.

NOZZLE CLEANING



Pull out the jet pipe gently and pull it for at least 5 times. Hold the jet pipe gently and wipe it and the nozzle with soft cloth, sponge or small brush with some neutral detergent.

SURFACE CLEANING

Use a smooth sponge or a piece of soft cloth dipped with a proper amount of room temperature water or neutral detergent and then wrung out to wipe the product surface. When cleaning any other part of the product, lift the top cover and the seat. Do not lay down the to cover or the seat until the detergent in the product has been completely flushed away, otherwise the evaporated detergent may corrode the product surface.

WINTERIZATION

When in use, make sure the indoor temperature is not below 39.2°F. When the indoor temperature is below 39.2°F, stop using the product and operate as below.

- Turn off the angle valve to stop water supply. After that, drain the water in the tank to flush the product once.

If the product is maintained before drainage, the product may damage and leak. If the product is moved from a cold place to a warm place, the water in it will condensate. In this case, make the product stand for a couple of hours before use.

TROUBLESHOOTING GUIDE

Fault phenomenon	Cause analysis	Solution
Water leakage	Loose hose connector	Turn off the water supply switch and check whether the connector between it (or the product) and the hose is tightened.
Flushing failure	Abnormal water supply	Check whether the water supply switch is on and whether the filter is blocked.
Insufficient flushing force	Too low water supply pressure	Please make sure the water supply pressure is above 15PSI.
	Insufficient water in the tank	Please make sure the interval between each twice flushing is longer than 60s.

WARNINGS

- When moving the product from a cold or humid environment to room temperature, please wait two hours until the condensed water is completely volatilized to prevent electrical short-circuiting.
- Do not place or store product where it can fall or be pulled into a tub or sink.
- Do not reach for an item that has fallen into the water.
- Heavy impact on ceramic leads to damage and water leakage.
- Never embed toilet base into cement, mortar or similar substances, this can lead to expansion cracking.
- Do not stand on seat, bowl or toilet lid.
- Do not use varnish thinners, gasoline, liquid chemicals, detergents, insecticides, toilet cleaners or scrubbing brushes, it may damage the product.
- Only use tap water or potable water to prevent chafing.
- Exposure to direct sunlight is not recommended.
- This product is equipped with a soft-close seat. Heavy pressing may damage the soft-close hinges.
- Do not lean against the toilet seat lid to avoid damage.
- Do not try flushing diapers, sanitary napkins or other unintended items to prevent clogging.
- If this product is malfunctioning, stop using immediately, turn off water supply, and contact Los Flexi customer service.
- Before installation, disassembly, repair or maintenance, unplug the power and turn off water supply.
- Do not use in an environment below 32°F.
- This product is not intended for children without adult supervision.
- This product is not intended for individuals with reduced physical, sensory, or mental capabilities.
- To prevent damage cause by freezing, please take measures to increase the temperature of the toilet.

LIMITED WARRANTY COVERAGE

ONE YEAR LIMITED WARRANTY

Los Flexi products are crafted with superior materials and impeccable workmanship, offering our customers reliable and long-lasting products. If defects in materials or craftsmanship are detected under standard use within the first one year of installation, Los Flexi will either supply replacement parts at no charge or, if deemed necessary, replace the product or its parts. This warranty is exclusive to the original purchaser, and proof of purchase is mandatory for any claim.

This Warranty Will Be Voided If:

- The product's installation did not follow our recommendations.
- The product was relocated from its initial installation site.
- The product underwent any modifications from its original condition.
- The product suffered from neglect, misuse, chemical overuse, accidents, or any other damages.

Los Flexi does not imply that our products adhere to local building or plumbing codes. Consumers must ascertain local code compliance before and during installation. This warranty is strictly for the original purchaser and first consumer.

Los Flexi won't be held responsible for any consequential damages linked to the product's installation, replacement, return, or usage. This includes, but is not limited to, freight charges, labor, downtime, home damages, and other associated costs (e.g., professional services, investigations, audits, legal fees).

This Los Flexi warranty clearly delineates our liability. Items not specified in this warranty fall outside Los Flexi's responsibility. In states with variations concerning implied warranties, our compliance is ensured.

For any queries or concerns, feel free to reach out to us at

Email: cs@losflexi.com
Site: www.losflexi.com
Voicemail : +1(662) 502-5099

SCAN FOR HIGH-RESOLUTION DIGITAL MANUAL