



**Bancroft®**  
Apron Bath with Bask™ Heated Surface  
**K-1150-RAW**

**Features**

- Integral apron with removable access panel.
- Integral tile flange.
- Right drain.
- Bask heated lumbar support with three temperature settings.
- Textured bottom surface.
- 60" (1524 mm) x 32" (813 mm) x 21-1/4" (540 mm) with flange.

**Material**

- Acrylic

**Installation**

- Alcove installation.



**Codes/Standards**

CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
UL 1795  
CSA C22.2 No. 218.2


**KOHLER® One-Year Limited Warranty**  
**KOHLER® Electronic Faucets, Valves,**  
**and Controls - Five-Year Limited**  
**Warranty**

See website for detailed warranty information.


**Available Color/Finishes**

*Color tiles intended for reference only.*

**Color Code Description**

	0	White
	96	Biscuit
	47	Almond
	NY	Dune
	G9	Sandbar

No change in measurements if connected with drain illustrated. (K-11677)

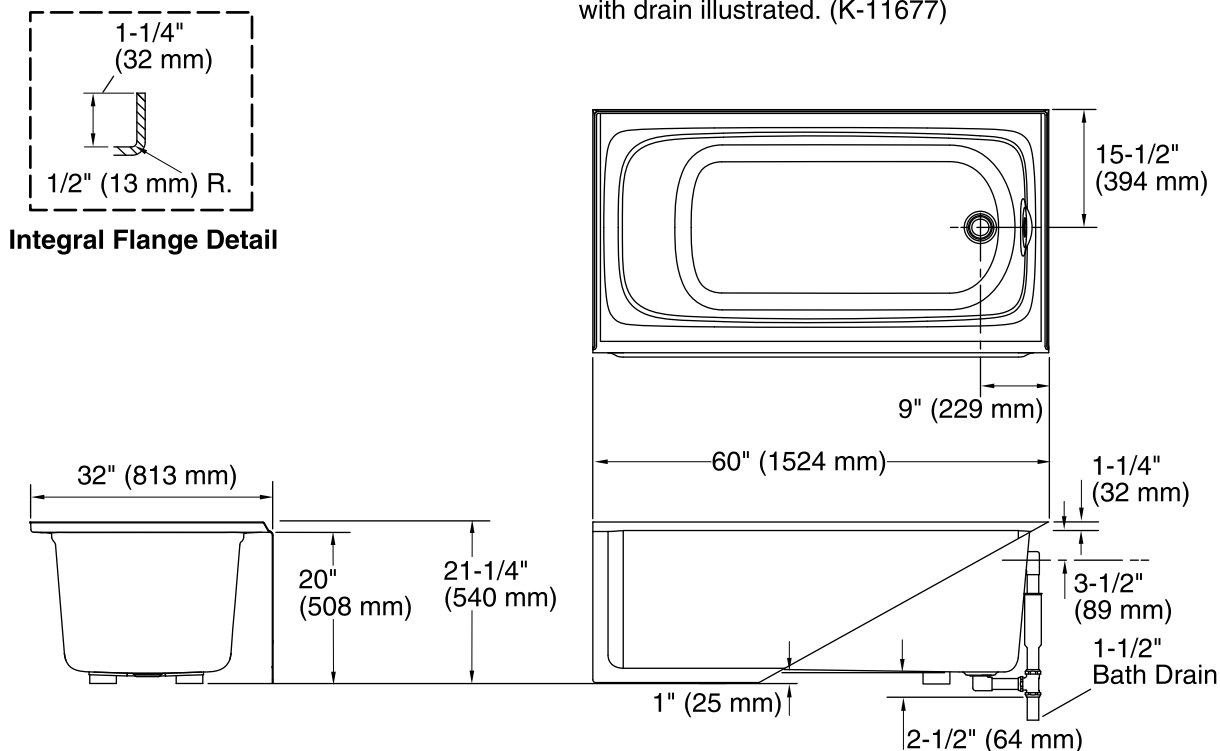

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Heater: 120 V, 15 A

## Technical Information

All product dimensions are nominal.

Installation: Alcove with Flange  
 Drain location: Right  
 Basin area, bottom: 45" x 22" (1143 mm x 559 mm)  
 Basin area, top: 54" x 25" (1372 mm x 635 mm)  
 Weight: 80 lbs (36.3 kg)  
 Minimum floor load: 45 lbs/ft² (219.7 kg/m²)  
 Water depth: 14" (356 mm)  
 Water capacity: 60 gal (227.1 L)  
 Electrical rating: Heater: 120 V, .5 A, 60 Hz, 65 W

## Notes

Measure your actual product for roughing-in details.

Install this product according to the installation guide.

Locate a GFCI-protected 120 V, 15 A, grounded electrical outlet within 24" (610 mm) of the bath junction box.

40" (1016 mm) cable is included.