


①	① metal ring 1pcs	⑥	⑥ round plate 1pcs	⑬	⑬ canopy 1pcs
②	② threaded rod 1pcs	⑦	⑦ cover 1pcs	⑭	⑭ cap nut 2pcs
		⑧	⑧ end cap 1pcs	⑮	lampshade 6pcs
③	hanging vase 1pcs	⑨ ⑩	lock nut & teeth lock washer; light arm 6pcs		X 1PCS
④	grub screw 2pcs	⑪	splicing connector 2pcs		X 1PCS
⑤	hex key 1pcs	⑫	chain 1pcs		X 3PCS
					X 3PCS
					X 3PCS
					X 3PCS

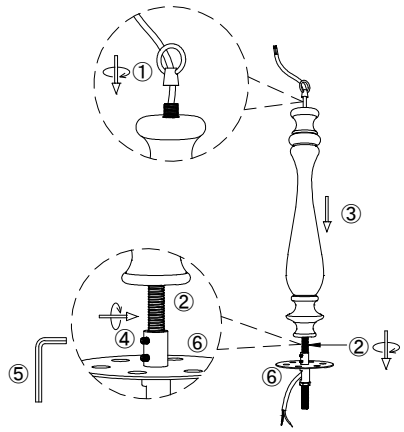

1.Let the wire which from the round plate ⑥ go through the threaded rod ②, rotate to install the rod ② to the plate ⑥, fasten it with grub screw ④ by rotate hex key ⑤.


2.Install the vase ③ to the threaded rod ② by rotate ring ①.




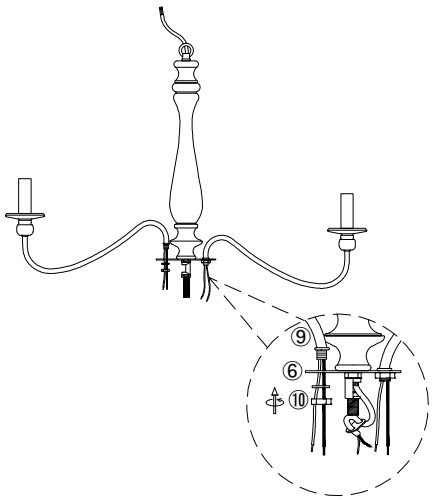

3.Install the light arms ⑨ to the round plate with lock nut & teeth lock washer ⑩, adjust them to suitable position like picture shown.


1.Pull the orange operating handle A to open the inlet hole, insert the wire B.
2.Press the operating handle A to finish wiring.
(Note: one inlet hole can put 2 or 3 wires inside)



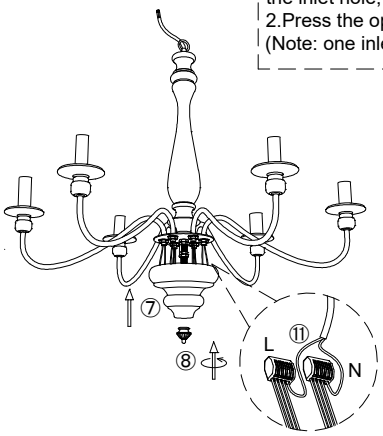


4.Connect all the wires together by parallel with connectors ⑪ (all live line-L use one connector, and neutral Line-N use another connector).

5.Close the cover ⑦ to the bottom of the light fixture with end cap ⑧.

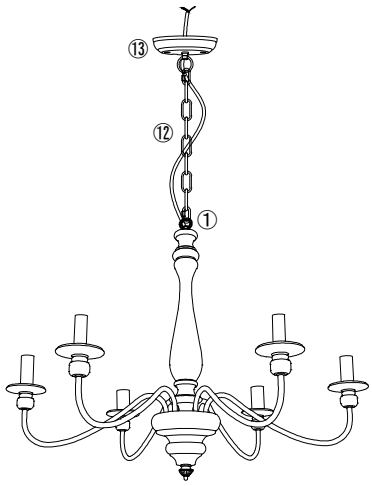

6.Hang the canopy to the light fixture with chain ⑫, let the wire go through the chain ⑫ and canopy ⑬.

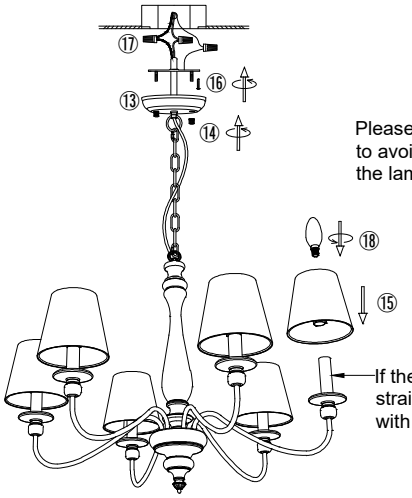

Please operate with gloves to avoid leaving stains on the lampshade.

If the lamp holder isn't straight, gently bend it with your hand to align it.

7.Install the bracket to the ceiling junction box with screw ⑯.
8.Connect the wires to your home line with cap connector ⑰.
9.Install the fixture to the bracket with cap nut ⑭.
10.Put the lampshade ⑮ on the bulb holder and install the bulb ⑱.

D5057-6

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !