
INSTALLATION INSTRUCTIONS

CHINA UNDERMOUNT SINK

SUGGESTED TOOLS AND MATERIALS



Philips Screwdriver



Sealant



Tape Measure



Safety Glasses

PARTS / HARDWARE (INCLUDED ONLY WITH AVANITY STONE TOPS)



4x



4x




4x



4x


SINK INSTALLATION

1

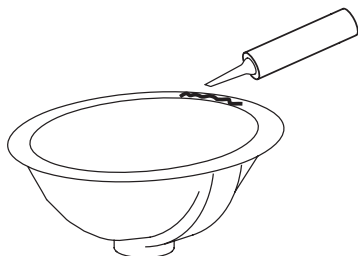


Apply a continuous bead of quality sealant to the top surface (rim) of the sink.

2

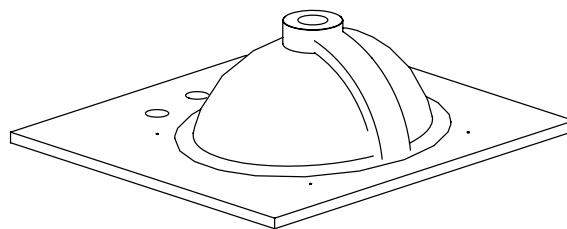

Turn the stone top upside down and place it on a clean, scratch resistant surface. Center the sink over the cutout.

3

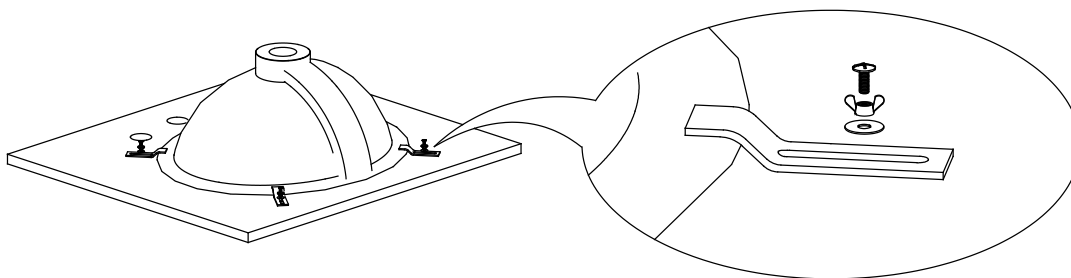

Secure the sink to the top using the mounting kit / hardware provided with the stone top, **HAND TIGHTEN ONLY**.

CARE AND CLEANING

For best results in caring for your vitreous china lavatory, we suggest:

- Always wipe off spills immediately.
 - Never use strong / abrasive cleaner. Always test your cleaning solution on unnoticeable areas before applying to the entire surface.
 - Wipe surfaces clean, immediately after applying cleaner.
 - Do not allow cleaner to sit or soak. Never let cleaners sit on the surface of the vitreous china for long periods of time.
 - Use a soft, dampened sponge and cloth. Never use an abrasive material such as brush or scouring pad to clean surfaces. They will scratch the surface of the vitreous china lavatory.
 - Always rinse and wipe clean the fixtures to prevent soap buildup.
-