


Assembly Instruction Sheet

for Model HL502976 (Remote Control Stepless Dimming)

Package Contents

Part	Description	Quantity
A	Crossbar	1 pc.
B	Fixture Body	1 pc.
C	Remote Control	1 pc.

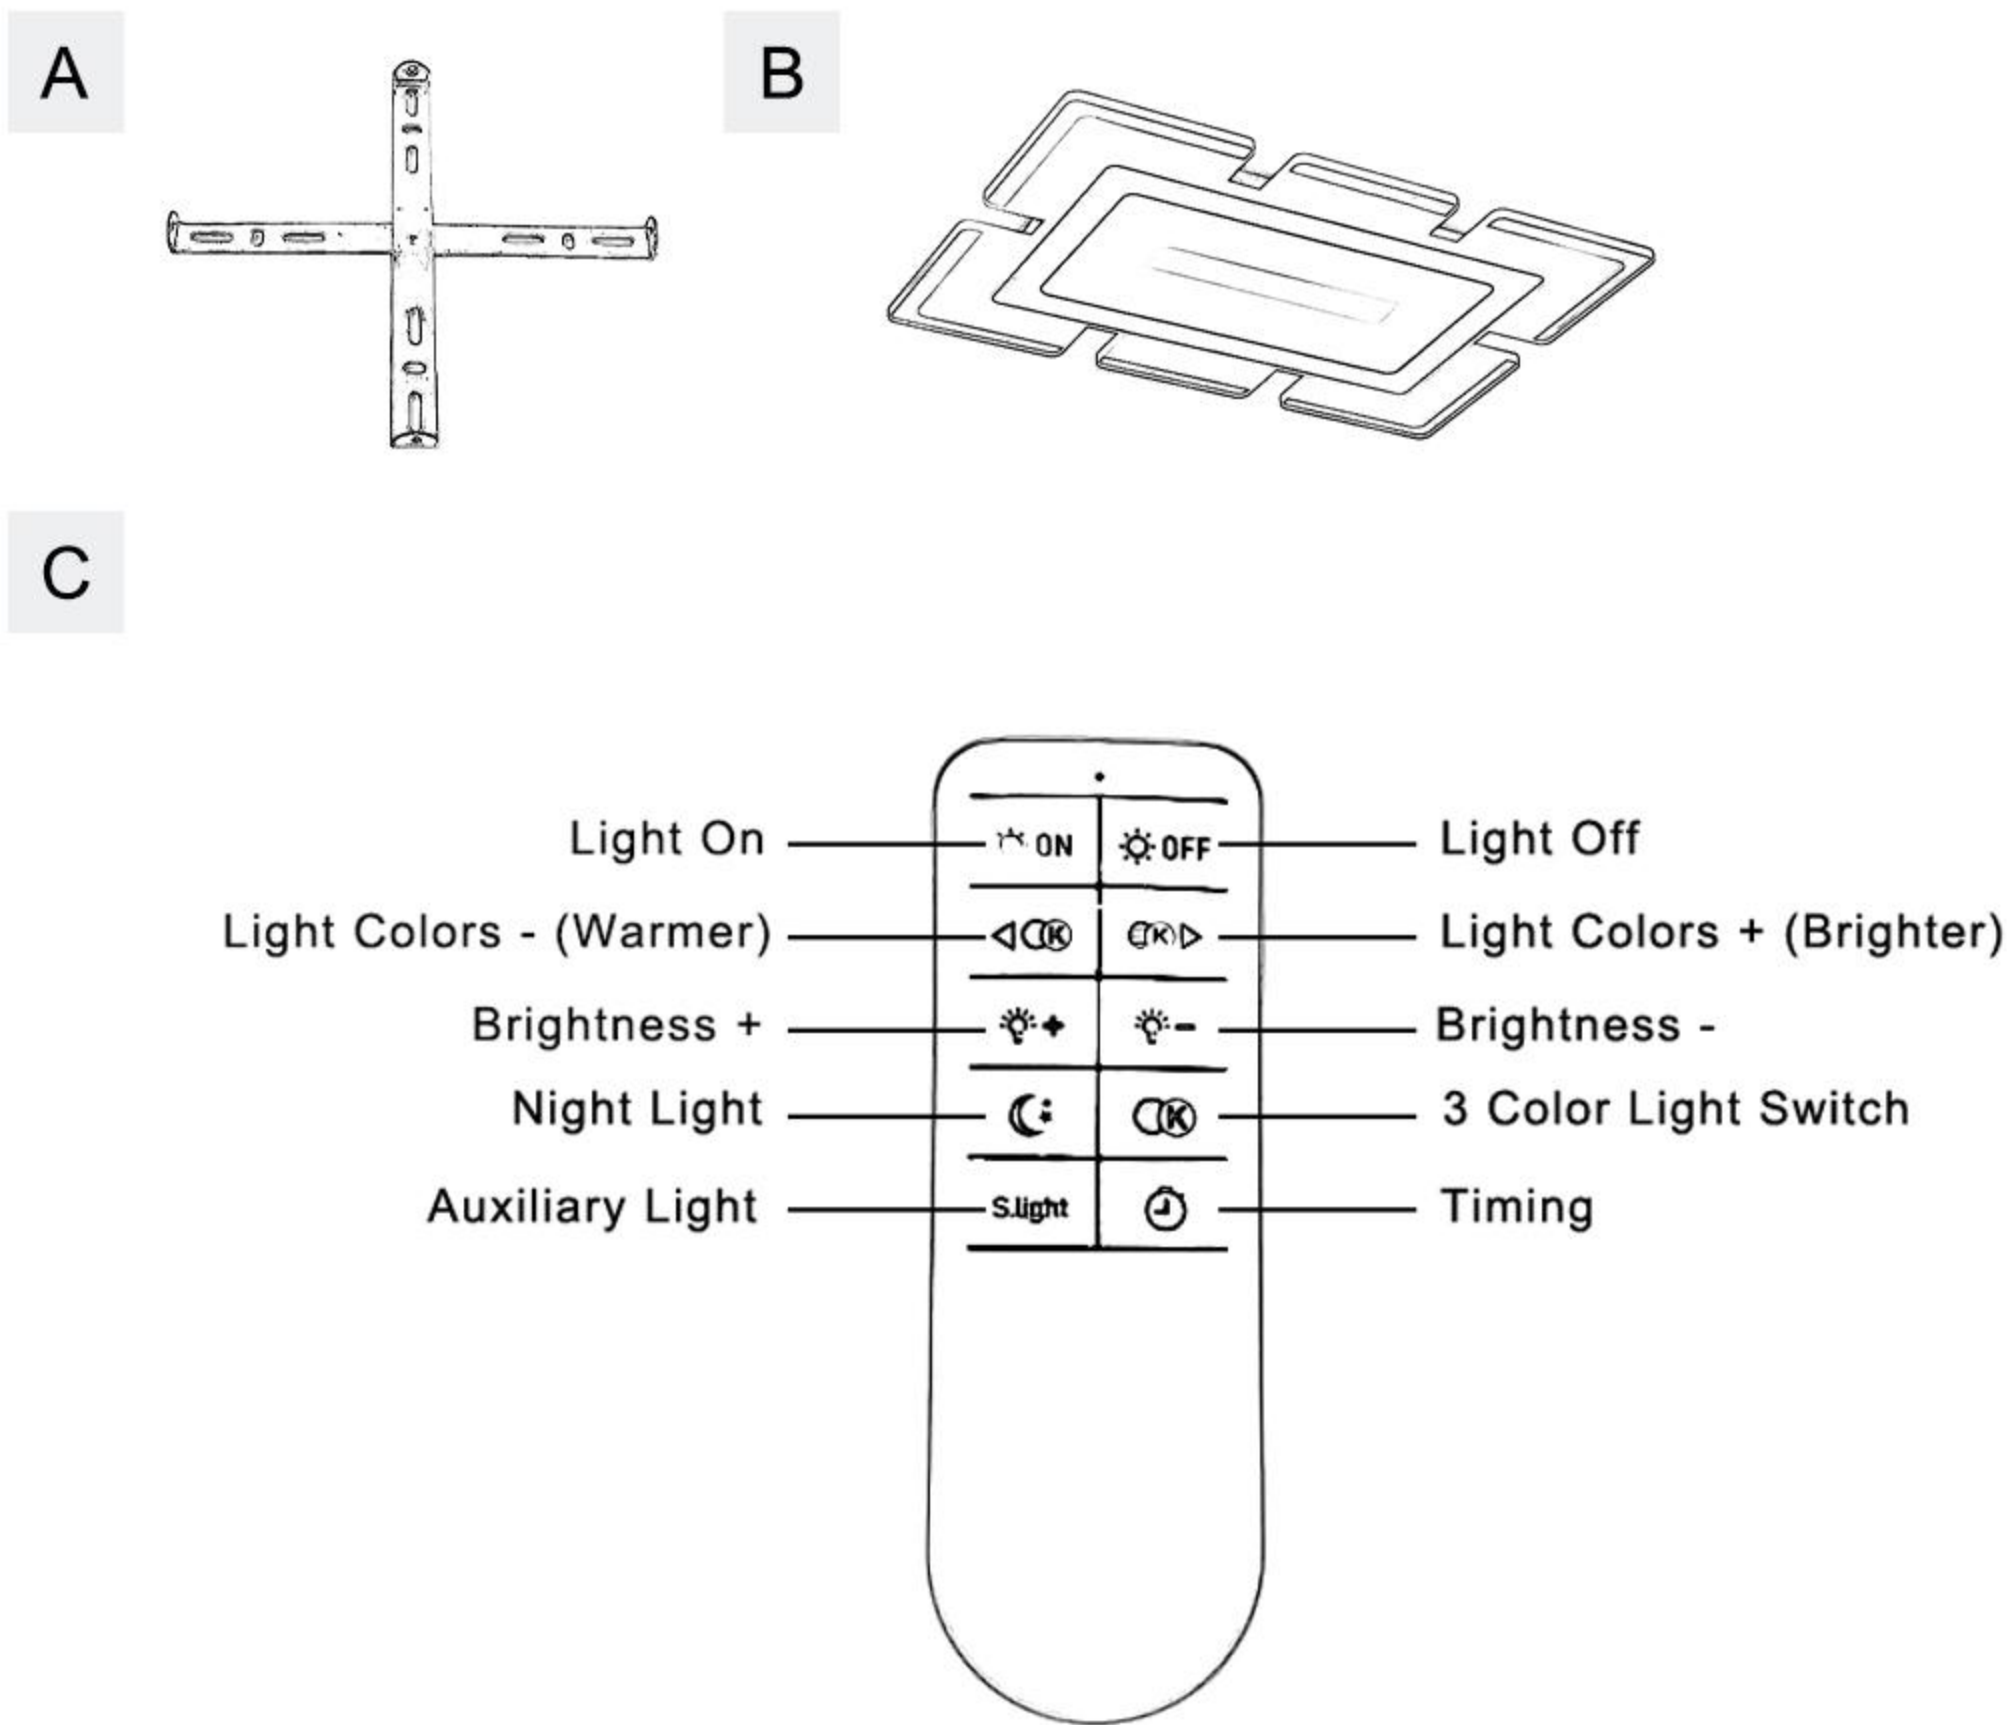

STEP 1

Remove the Crossbar(A) from the Fixture Body(B).
Mark the drilling position on ceiling with the help of the Crossbar(A).
Drill holes on the marks and stick the expansion anchors into the holes.
Fix the Crossbar(A) to the expansion anchors with self-tapping screws.

STEP 2

Hold the fixture close to the ceiling.
Connect live line to the Black/Red wire from the canopy of Fixture Body(B).
Connect neutral line to the White/Blue wire from the canopy of Fixture Body(B).
If two wires are identical, the wires do not distinguish between a live line and a neutral line.
Connect ground line to the Yellow-Green wire.

STEP 3

Attach the canopy of Fixture Body(B) to the Mounting Bracket(A).

STEP 4

Align the holes of the canopy of the Fixture Body(B) to the side holes of the Crossbar(A).
Attach the canopy of Fixture Body(B) to the Crossbar(A) with screws.

STEP 5

Tear off the protective film of the Fixture Body(B).

Your fixture is now assembled and ready to use.