

SPECIFICATION SHEET

BPL - 400

- Step/ Deck Lights
- Aluminum
- Brass

Fixture Specifications:

Housing: Die-cast aluminum or Brass

Wiring: Fixture is prewired with a 3ft 18-2 direct burial cord.


Finish: Polyester UV powder coated, available in **BLK-Black, RST-Rust and BS-BZ Brass-Bronze**

Electrical Notes: A 12V transformer is required.
Voltage range for 12V halogen lamps are 11V-12.5V
Voltage range for LED lamps are 8V-21V.
Proper grease/lubricant is suggested on threaded parts during installation process.

Socket: G4 Bi-Pin socket

Warranty: Limited five (5) year warranty on fixture housing and stem against manufacture's defects.

Lamp: 12V, JC Bi-Pin bulb 20W standard, 20W Max
LED lamps available in 3W, with 2700K-warm white color temperature.

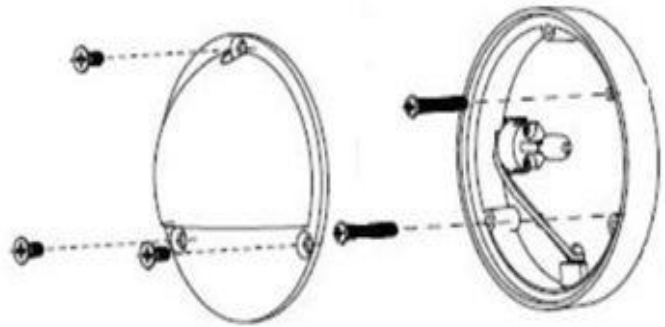

AVAILABLE LED LAMPS

LAMP NUMBER	BEAM		LUMEN	COLOR & TEMP.	RATED HOURS	HALOGEN EQUIVALENT
	WATTS	SPREAD				

LED3WG412V	3	360°	270	2700K	30000	20 Watt
------------	---	------	-----	-------	-------	---------

AVAILABLE HALOGEN LAMPS

LAMP NUMBER	WATTS	BEAM		COLOR & TEMP.	RATED HOURS
		SPREAD	LUMEN		

JC10W	10	360°	75	2700K	2000
JC20W	20	360°	190	2700K	2000

