




Chandeliers

SKU: HCDL16A
[Instruction Manual]

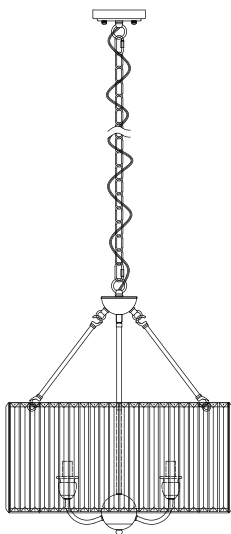

Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

Warning:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position. Depending on which type of fuse box in your home:

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL





FIG.3 FUSE BOX

PACKING LIST

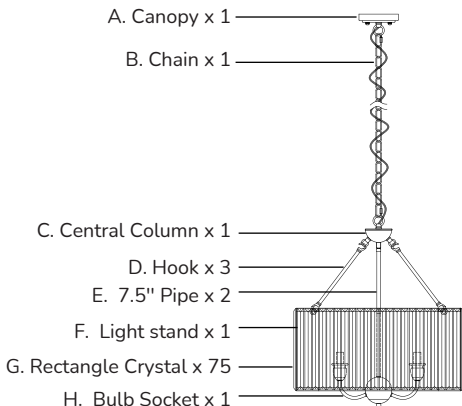

1. Rectangle Crystal (G) have some extra pieces for back-up.


INSTALLATION KIT

AA x1  Mounting Bracket	BB x1  Ground Screw	CC x2  Knurled Nut	DD x3  Wire Nut
EE x3  Outlet Box Screw	FF x150  Staple Clip		

1. Staple Clip (FF) have some extra pieces for back-up.

2. Ground Screw (BB) have been pre-installed on Mounting Bracket (AA).

INSTALLATION

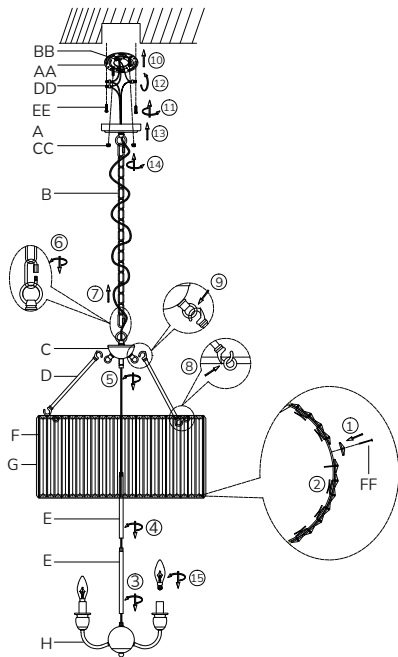

Step 1:

Fix the Mounting Bracket : Secure the mounting plate to the ceiling junction box using screws.

Step 2:

Install the Nut: Tighten the nut onto the mounting rod.

Step 3:

Thread the Wires: Pass the wires through the downrod.

Step 4:

Tighten the Downrod: Screw the downrod into the chandelier body.

Step 5:

Attach the Chain: Connect one end of the chain to the ceiling hook.

Step 6:

Secure the Safety Clip: Close the chain's safety latch to secure it.

Step 7:

Hook the Chain: Attach the other end of the chain to the chandelier top hook.

Step 8:

Install the Canopy: Slide the canopy up to the ceiling.

Step 9:

Fix the Canopy: Tighten the nut to hold the canopy in place.

Step 10:

Connect the Wires: Connect the chandelier wires to the ceiling wires using wire nuts.

Step 11:

Secure to Ceiling: Ensure the chandelier is firmly fixed to the ceiling.

Step 12:

Check All Connections: Verify all screws, hooks, and wires are secure.

Step 13:

Install Light Bulbs: Screw in the light bulbs and test the chandelier by turning on the power.

E12 Bulbs X 6

(Max 40W each, not included)

Specifications

- Input Voltage: 120VAC 60Hz
- Max.load Power: Incandescent Bulb 40w
- Socket Type: Standard Medium E12

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China