
outline drawing:




model:

Technical data: Power supply voltage 110-120V, bulb type E26Max40Wx24PCS (not included)

CAUTION

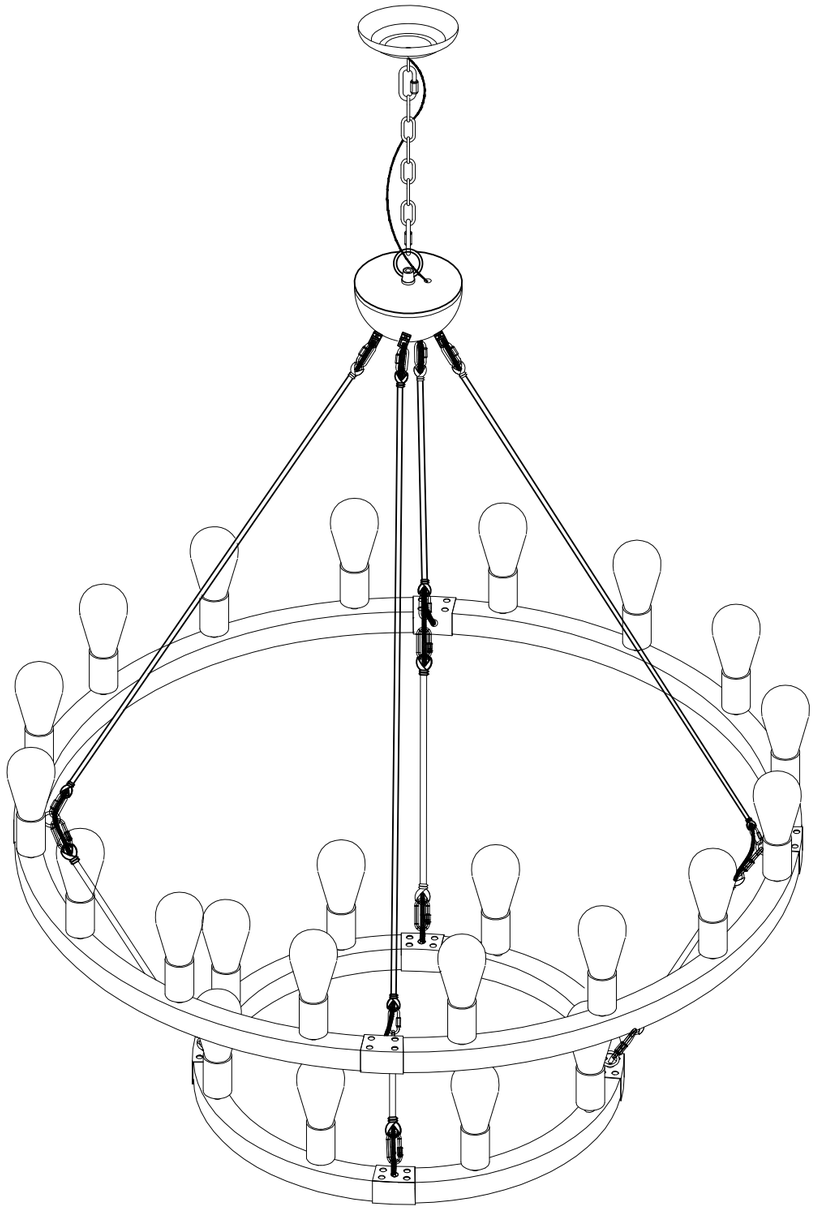


- Before installing the lighting fixtures, please check the insulation of the wires for any cuts, wear, or possible damage during transportation。If the wires are defective, do not attempt installation 。
- In some countries, electrical installation work can only be carried out by authorized electrical contractors。Please contact the local power department for advice。




IMPORTANT Before starting the installation work, please make sure to cut off the power supply to the circuit。

IMPORTANT Keep children away from the installation process 。

Required tools (not included):



Ladder



Phillips screwdriver



pincers

Required tools (including):




expension screws



glove


The hardware kit provides:



sling chain



carabiner



Installation board



mounting screw

Hanging plate screws



ring



CONNECTORS




tray



Semi circular body



Long pull rod




Lights+decorative wooden rings




cable tie




Short pull rod



Lights+decorative wooden rings




Gecko rubber stopper



Self tapping screws


- The components displayed on each lamp may vary slightly

Step 1

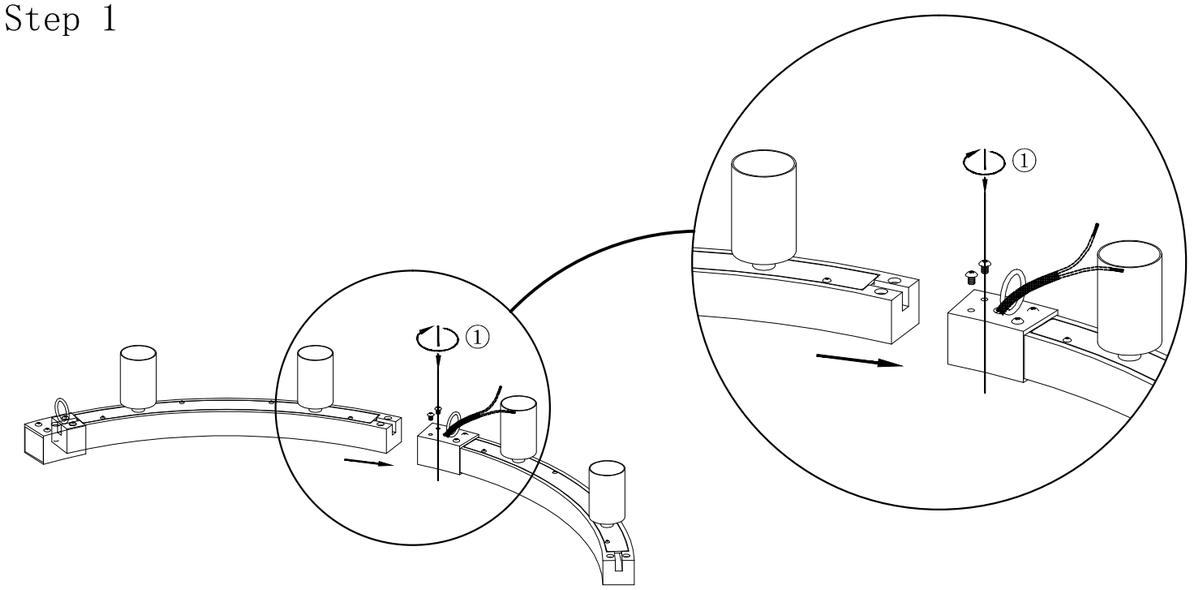


① Insert the decorative wood at the end without hardware components into another hardware component and secure it with screws。

Step 2

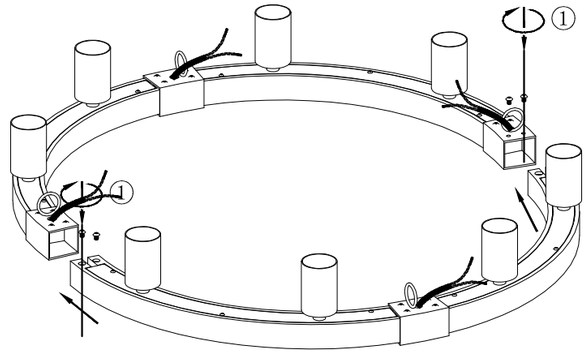


① Small circle splicing, refer to step 1 for this step 。

Step 3

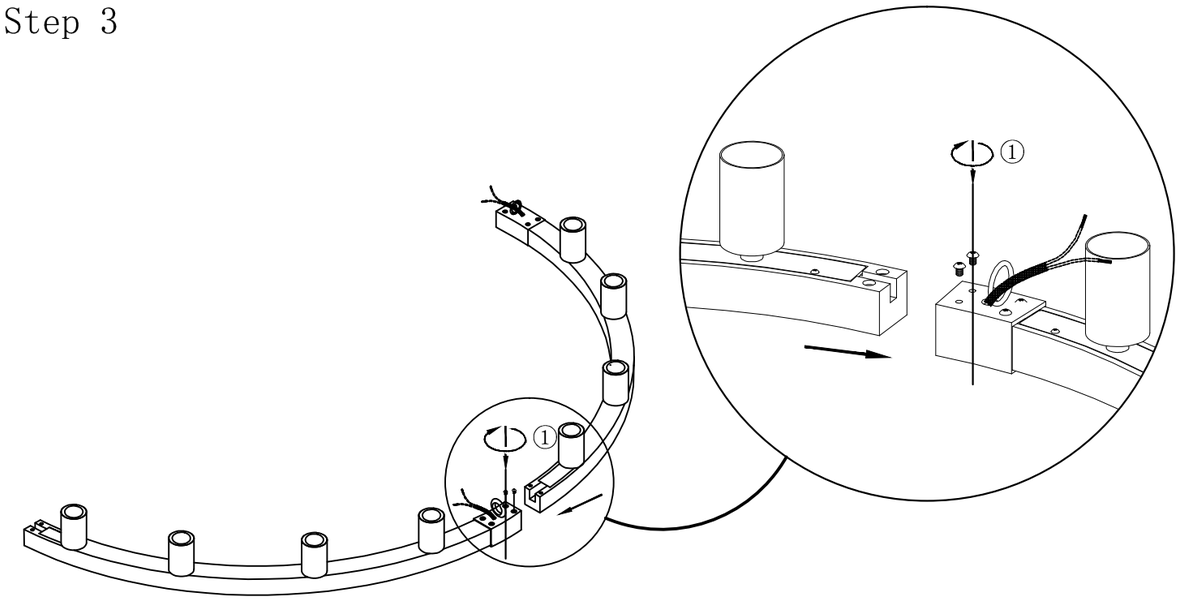


① Insert the decorative wood at the end without hardware components into another hardware component and secure it with screws。

Step 4

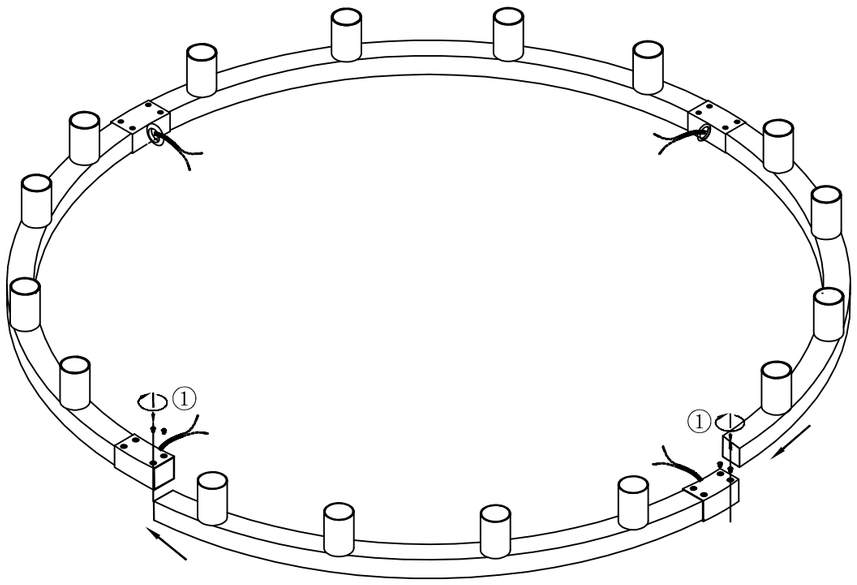


① Large circle splicing, refer to step 1 for this step 。

Step 5

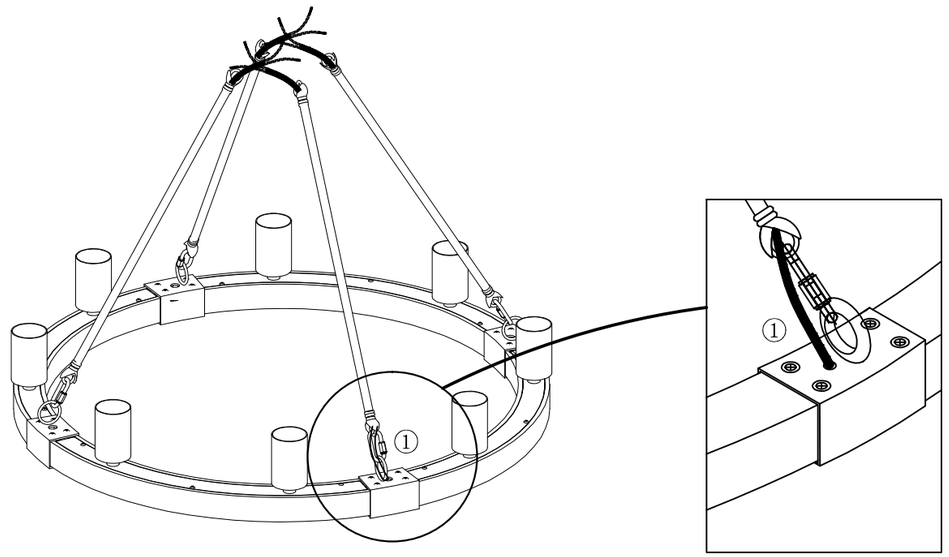


① Thread the power cable through the pull rod。

Step 6

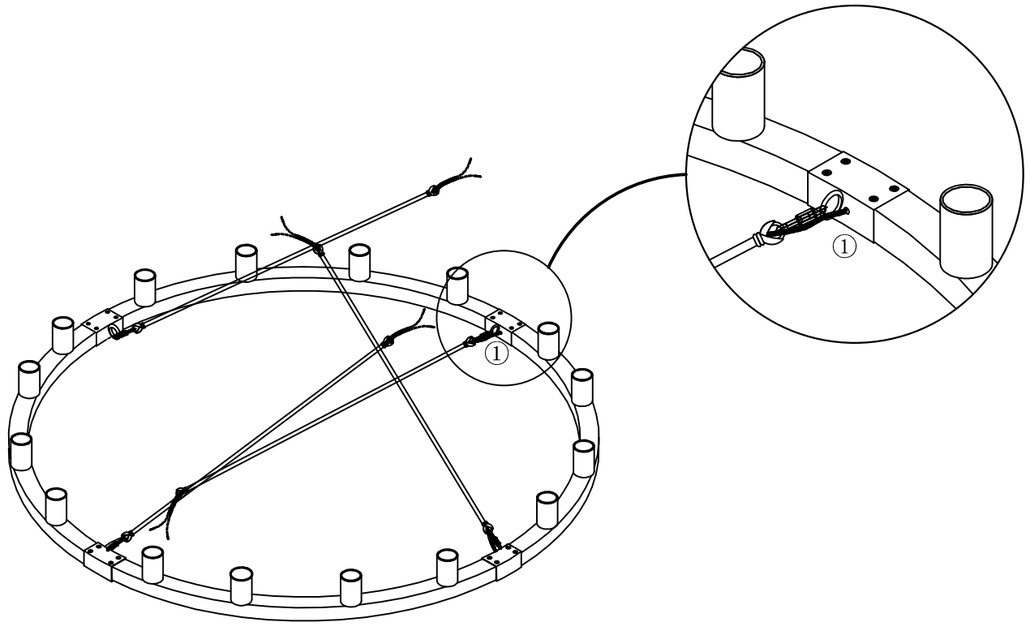

① Thread the power cable through the pull rod。

Step 7

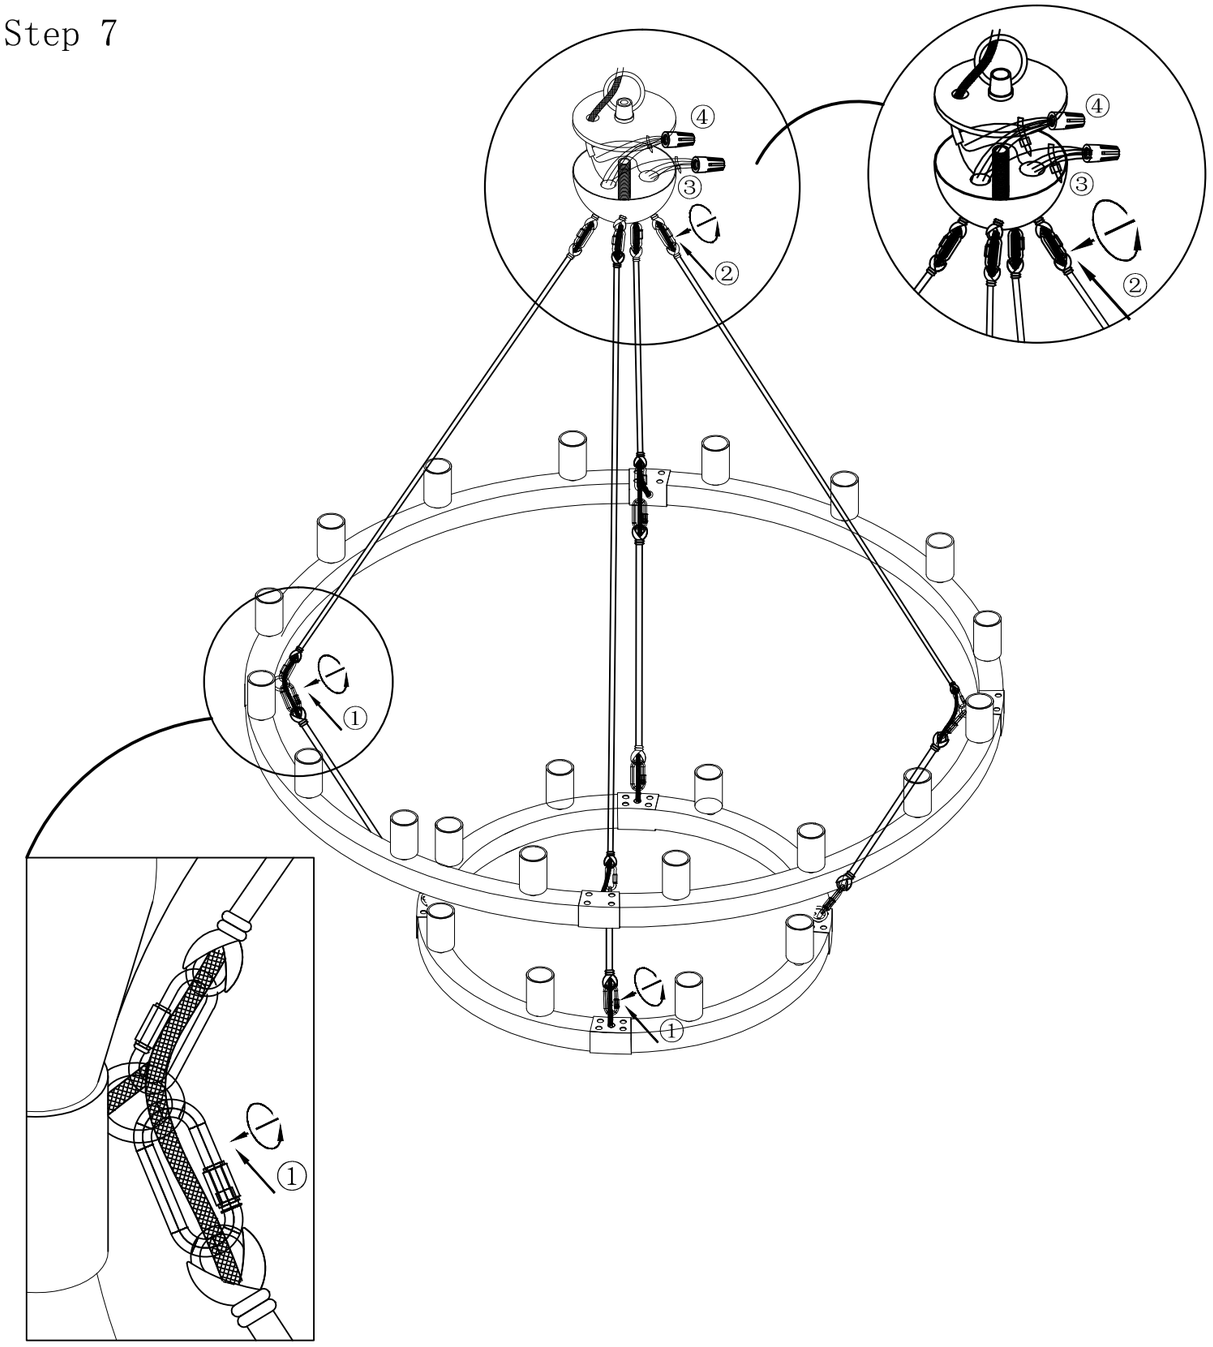


① Hang the short pull rod on the lower small circle onto the hardware ring of the large circle, and then thread the power cable through the long pull rod on top of the large circle。

② Connect the vertical hook to the semi-circular body and lamp body, and thread the power cable into the semi-circular body。

③ Use two zip ties to tie wires of the same color together。

④ Two cable connectors are used to connect wires of the same color, black to black and white to white。

Step 8

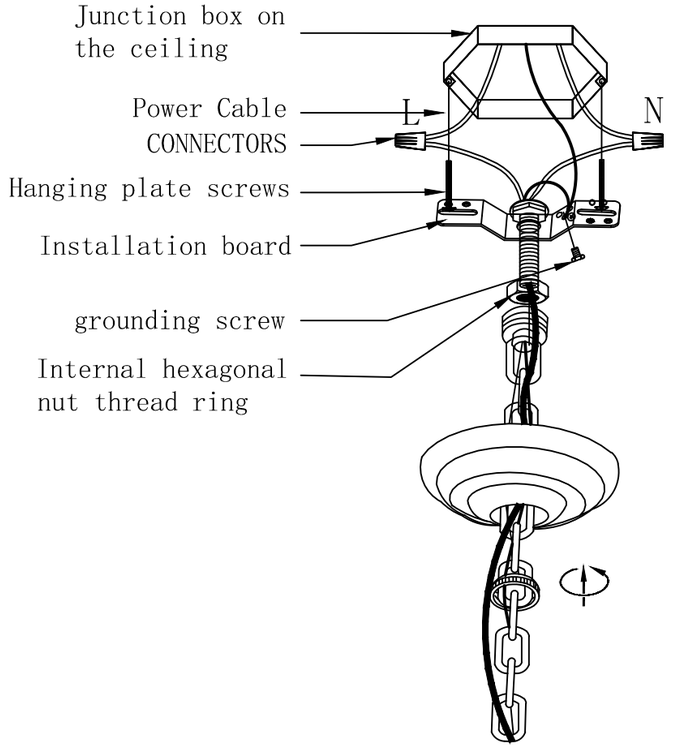

① Thread all the wires through the canopy and installation kit。

② Connect the power cable with two cable connectors。


③ Connect the grounding wire and tighten it with the grounding screw。

④ Install the fixing screws into the mounting plate, install the installation unit under the junction box, and tighten with two mounting screws。


⑤ Fix the canopy in place using a suspension ring. Tighten the screw ring and hex nut with a wrench to tighten the hex nut。

⑥ Tighten the fixing screws on the rain shelter holes。


⑦ Swivel the lid onto the canopy。

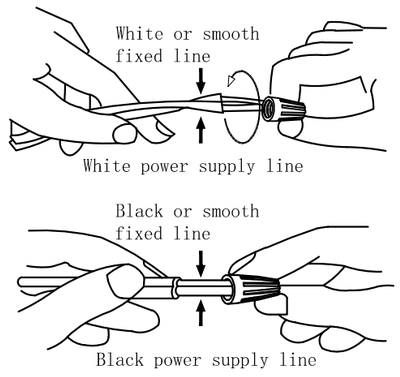

Connect the black or red wire (with an L sticker on the wire) to:	Connect the white wire (with N stickers on the wire) to:
black	white
Parallel lines - pti&l (circular and smooth)	Parallel lines - spri&l (square and ridge shaped)
Transparent, brown, gold or black (without tracer)	Transparent, brown, gold or black (with tracer)
Copper core insulated wire (excluding GREEN)	Silver conductor insulated wire (excluding GREEN)

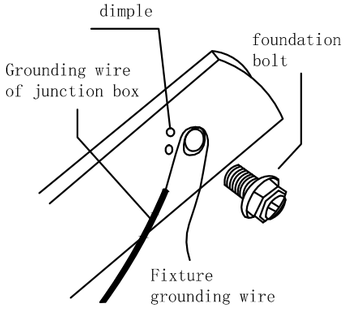

Step 9

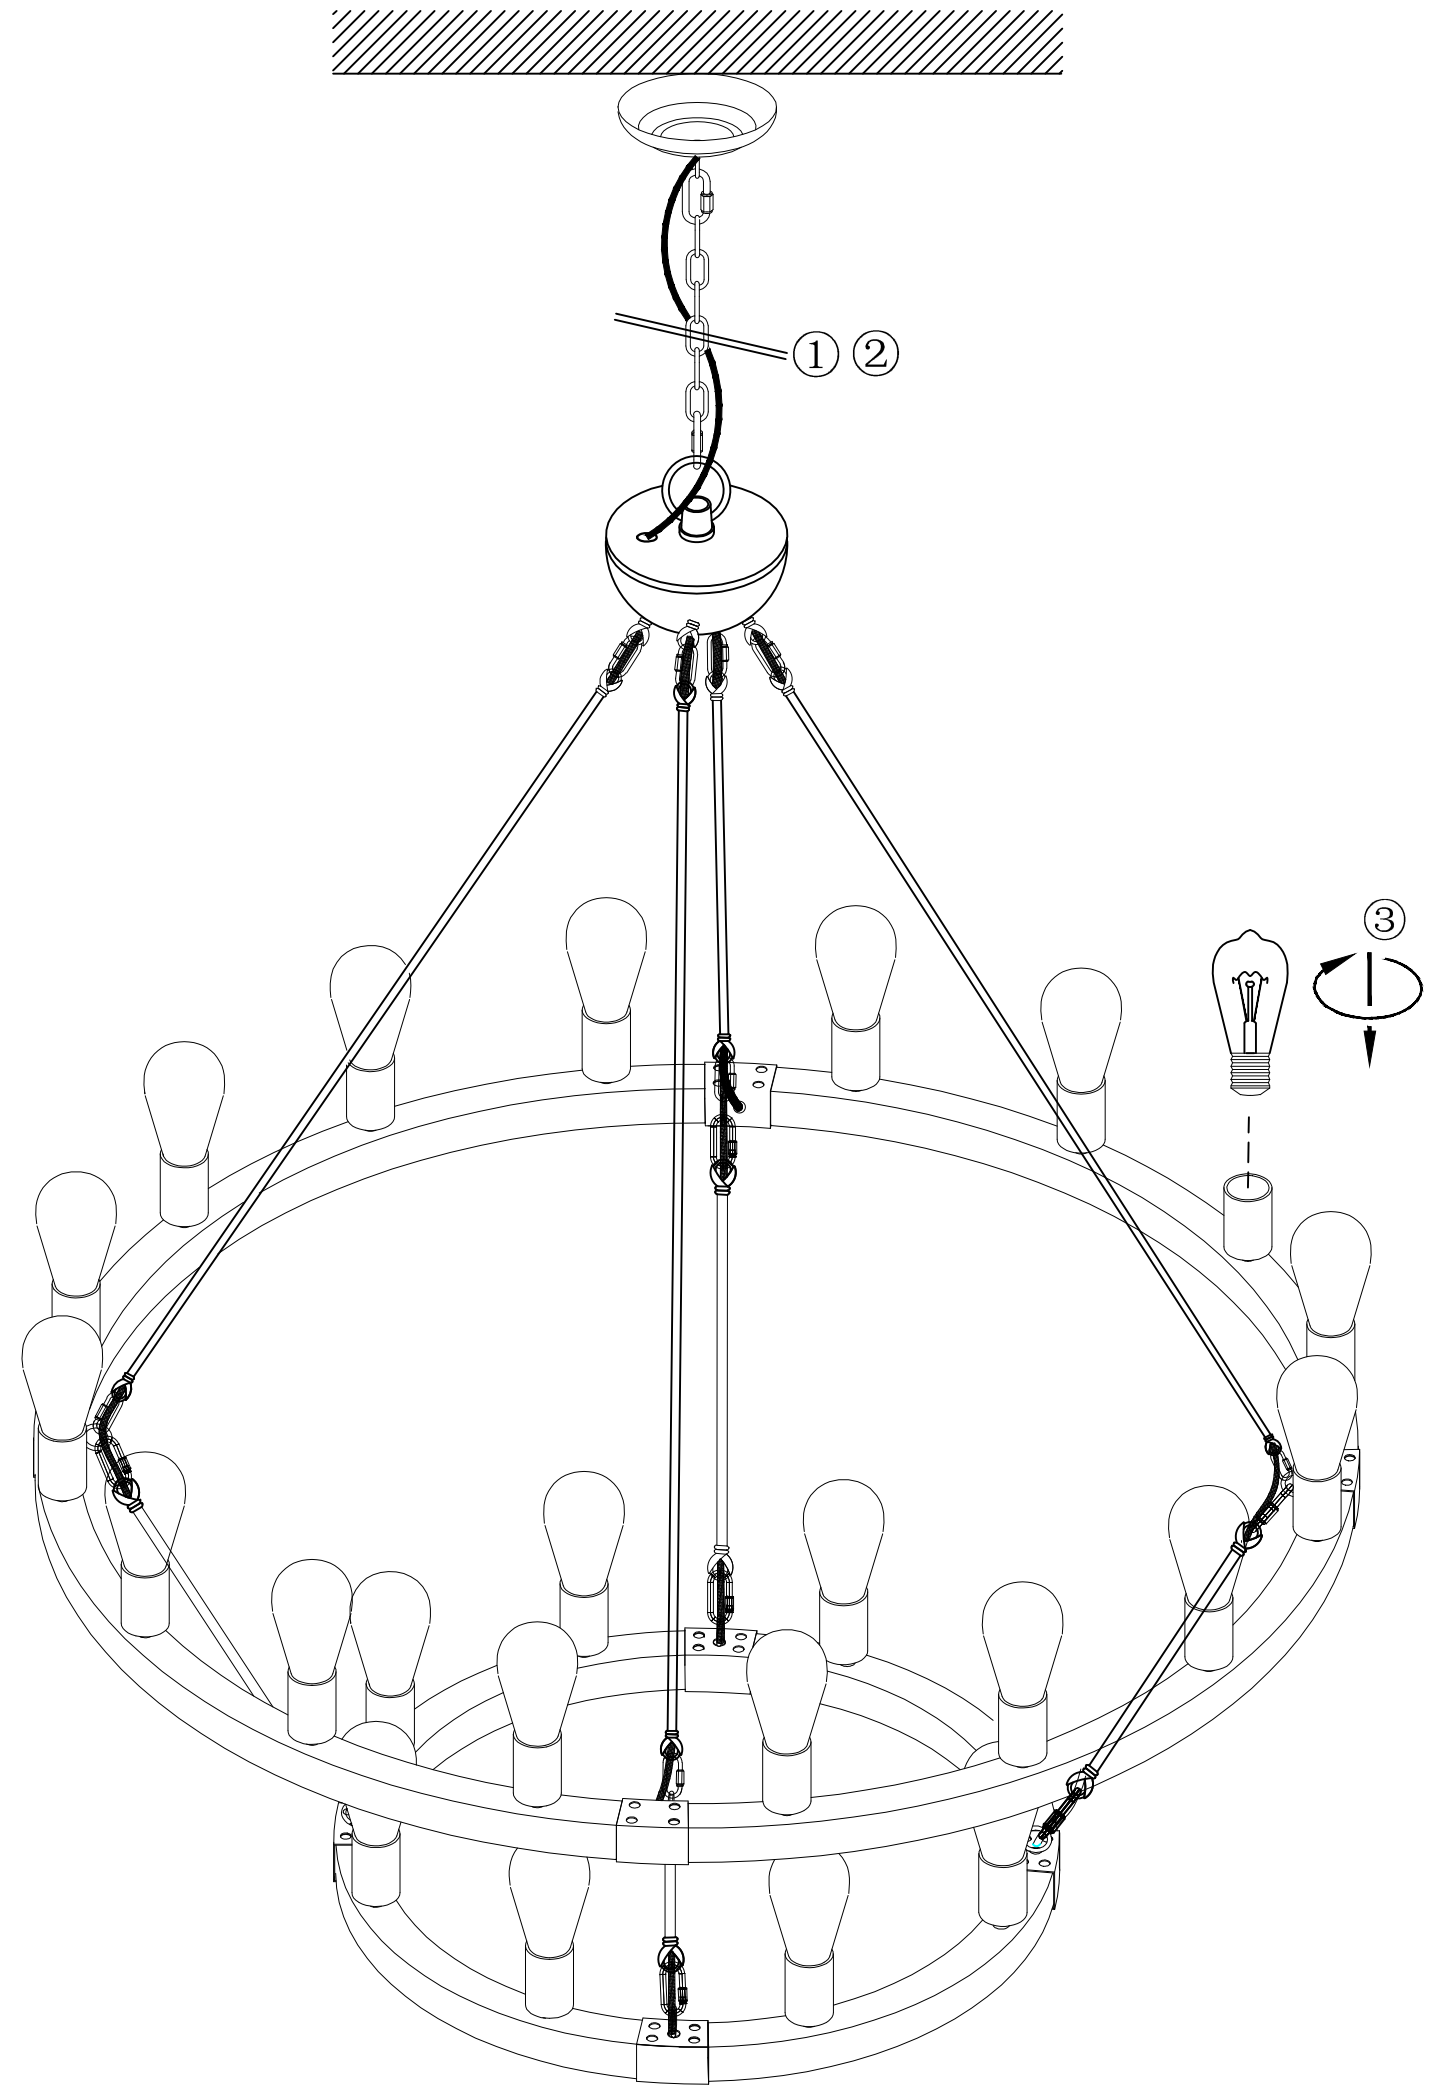

①② This depends on the height of your ceiling and the desired suspension length. You can measure the chain and adjust the locking buckle to achieve the desired chain length。

③ Tighten the light bulb (E26 maximum 40W, not included)。