

FLAT PANEL

1x4ft, 2x2ft, 2x4ft



2x4 ft

2x2 ft

1x4 ft



SPECIFICATIONS

1x4 Flat Panels

Item Description	LED45W1X4PANEL/30K/DIM	LED45W1X4PANEL/35K/DIM	LED45W1X4PANEL/40K/DIM	LED45W1X4PANEL/50K/DIM	LED45W1X4PANEL/65K/DIM
Model	LR24045	LR24046	LR24047	LR24048	LR24049
Power (W)	45	45	45	45	45
Voltage - Frequency	100-277	100-277	100-277	100-277	100-277
Color	3000K	3500K	4000K	5000K	6500K
Temperature	SOFT WHITE	NATURAL	COOL WHITE	BRIGHT WHITE	DAYLIGHT
CRI (Ra)	81	81	81	81	81
Typical Lumens (lm)	5000	4950	5150	5150	5100
Efficacy (LPW)	111.1	110.0	114.4	114.4	113.3
Beam Angle	120°	120°	120°	120°	120°
Dimmable	Yes	Yes	Yes	Yes	Yes
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Temperature Rating	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°
Rated Lifetime	50,000	50,000	50,000	50,000	50,000
Dimensions (LxWxH)	47.7" x 11.8" x 2"	47.7" x 11.8" x 2"	47.7" x 11.8" x 2"	47.7" x 11.8" x 2"	47.7" x 11.8" x 2"

SPECIFICATIONS

2x2 Flat Panels


Item Description	LED45W2X2PANEL/30K/DIM	LED45W2X2PANEL/35K/DIM	LED45W2X2PANEL/40K/DIM	LED45W2X2PANEL/50K/DIM	LED45W2X2PANEL/65K/DIM
Model	LR24050	LR24051	LR24052	LR24053	LR24054
Power (W)	45	45	45	45	45
Voltage - Frequency	100-277	100-277	100-277	100-277	100-277
Color	3000K	3500K	4000K	5000K	6500K
Temperature	SOFT WHITE	NATURAL	COOL WHITE	BRIGHT WHITE	DAYLIGHT
CRI (Ra)	81	81	81	81	81
Typical Lumens (lm)	4850	4950	5150	5150	5100
Efficacy (LPW)	107.8	110.0	114.4	114.4	113.3
Beam Angle	120°	120°	120°	120°	120°
Dimmable	Yes	Yes	Yes	Yes	Yes
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Temperature Rating	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°
Rated Lifetime	50,000	50,000	50,000	50,000	50,000
Dimensions (LxWxH)	23.7" x 23.7" x 2"	23.7" x 23.7" x 2"	23.7" x 23.7" x 2"	23.7" x 23.7" x 2"	23.7" x 23.7" x 2"

SPECIFICATIONS


2x4 Flat Panels

Item Description	LED72W2X4PANEL/30K/DIM	LED72W2X4PANEL/35K/DIM	LED72W2X4PANEL/40K/DIM	LED72W2X4PANEL/50K/DIM	LED72W2X4PANEL/65K/DIM
Model	LR24055	LR24056	LR24057	LR24058	LR24059
Power (W)	72	72	72	72	72
Voltage - Frequency	100-277	100-277	100-277	100-277	100-277
Color	3000K	3500K	4000K	5000K	6500K
Temperature	SOFT WHITE	NATURAL	COOL WHITE	BRIGHT WHITE	DAYLIGHT
CRI (Ra)	83	83	83	83	83
Typical Lumens (lm)	7100	7550	7920	7920	7920
Efficacy (LPW)	98.6	104.9	110	110	110
Beam Angle	120°	120°	120°	120°	120°
Dimmable	Yes	Yes	Yes	Yes	Yes
Power Factor	>0.90	>0.90	>0.90	>0.90	>0.90
Temperature Rating	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°	-4° - 122°
Rated Lifetime	50,000	50,000	50,000	50,000	50,000
Dimensions (LxWxH)	47.7" x 23.7" x 2"	47.7" x 23.7" x 2"	47.7" x 23.7" x 2"	47.7" x 23.7" x 2"	47.7" x 23.7" x 2"


DIMENSIONS

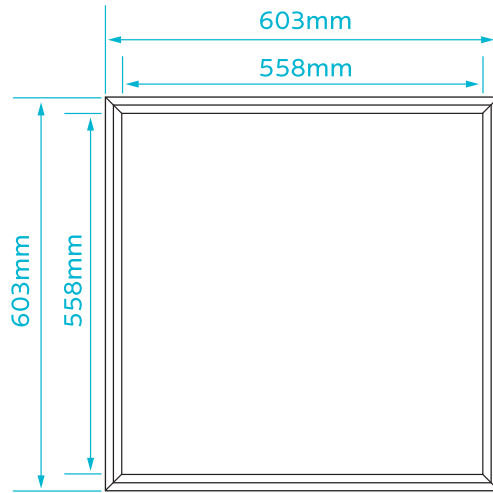

603mm * 603mm (2 * 2 ft)

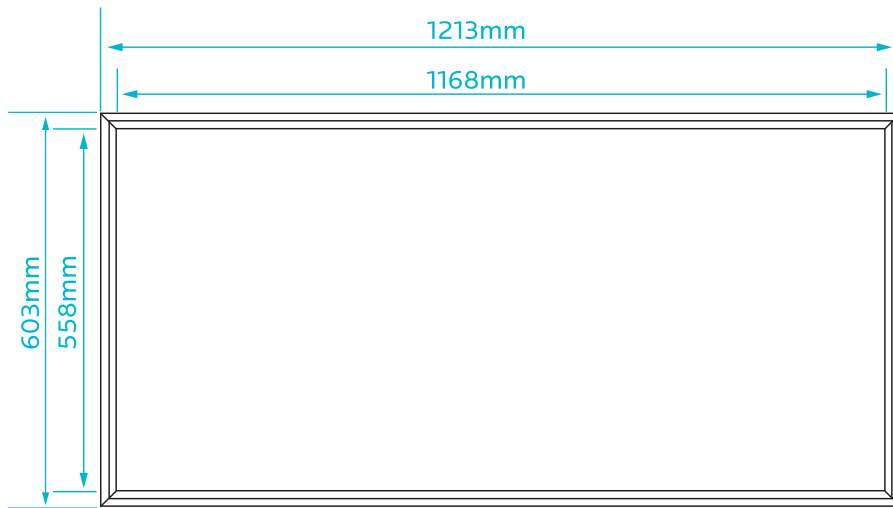




603mm * 1213mm (2 * 4 ft)

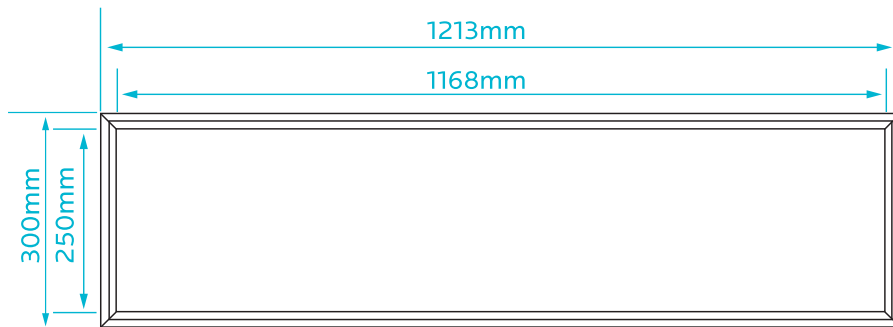

300mm * 1213mm (1 * 4ft)

ACCESSORIES

SURFACE KIT & SUSPENSION KIT

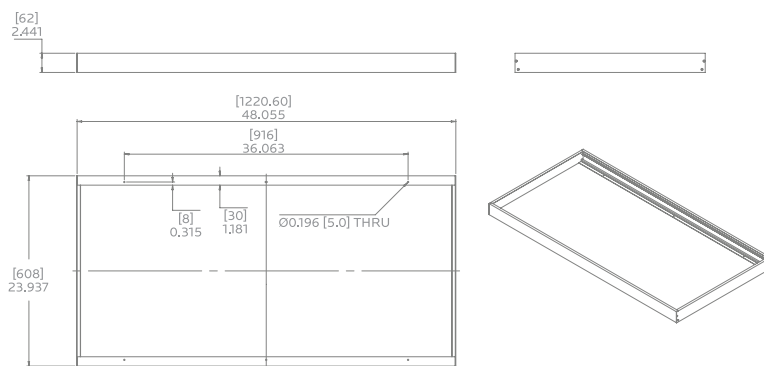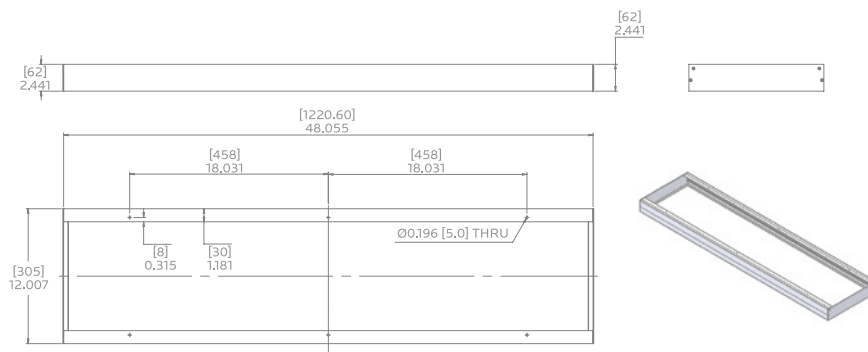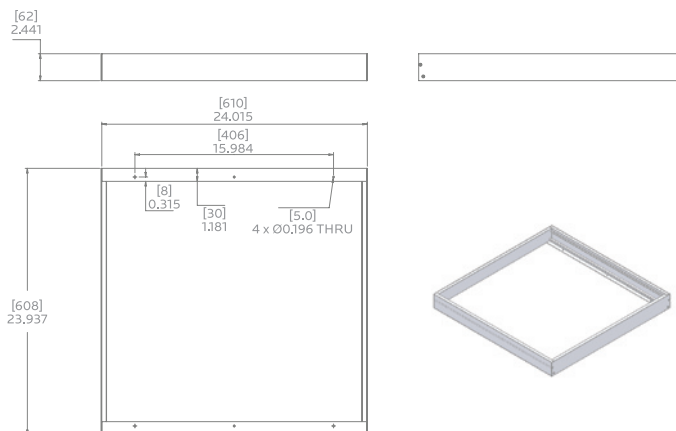

MODEL	DESCRIPTION
LR24072	LED/1X4/SURFACE/KIT
LR24070	LED/2X2/SURFACE/KIT
LR24075	LED/2X4/SURFACE/KIT
LR24077	LED/SUSPENSION/KIT


ACCESSORIES

FLANGE KIT


MODEL	DESCRIPTION	DIMENSIONS
LR24080	LED/1X4/FLANGE/KIT 1X4 RECESSED MOUNTING KIT	13.1" x 49.1" x 1.4"
LR24081	LED/2X2/FLANGE/KIT 2X2 RECESSED MOUNTING KIT	25.1" x 25.1" x 1.4"
LR24082	LED/2X4/FLANGE/KIT 2X4 RECESSED MOUNTING KIT	25.1" x 49.1" x 1.4"



1X4

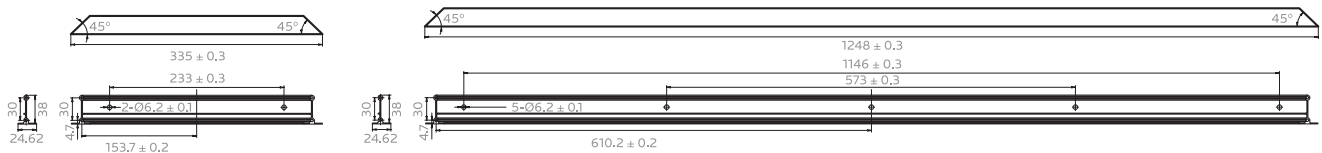

2X2

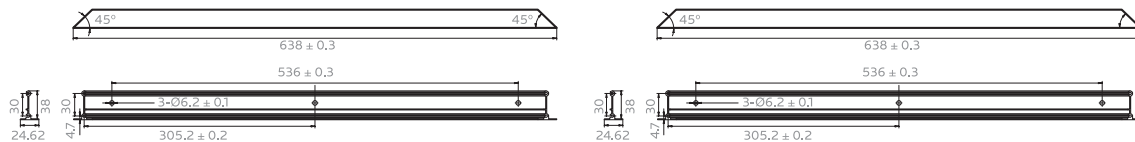

2X4

