


Product Installation Instructions

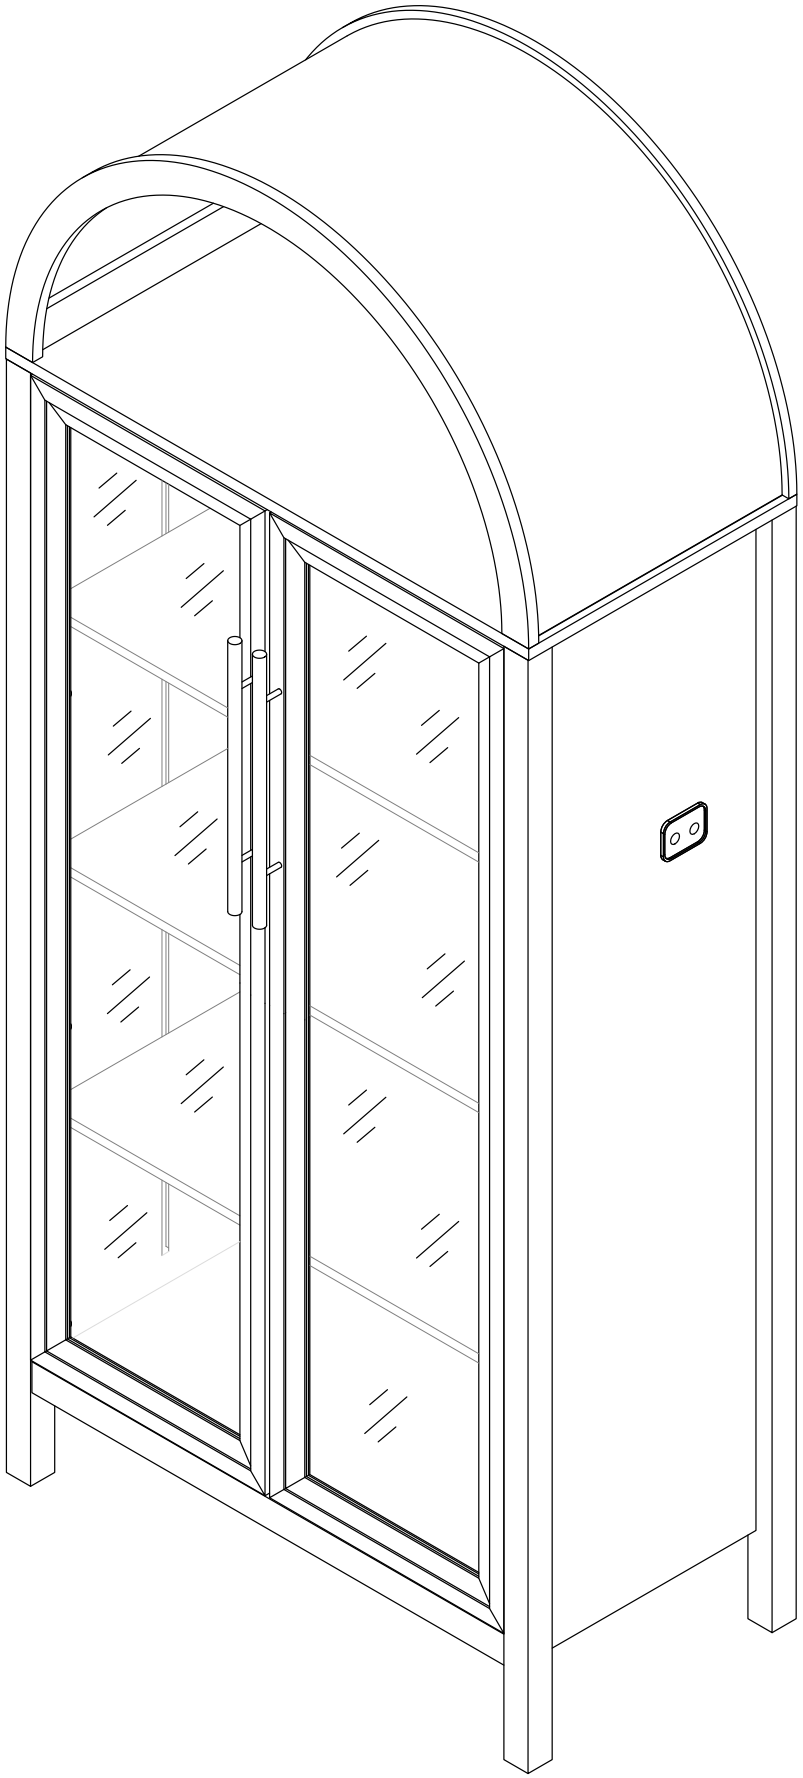





A x1



B x1




C x1



D x1



E x1




F x1




G x1




H x1




I x3




J x2




J1 x1




J2 x1




K x1




L x2




M x1




N x1

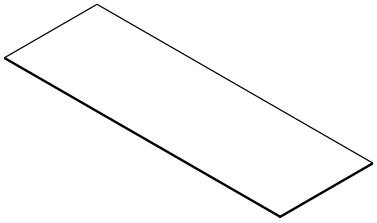


O x1

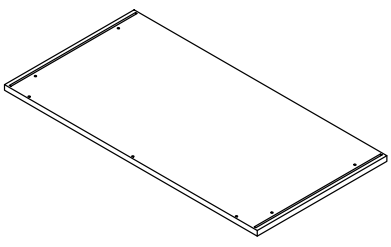

P x1
















Q x1




R x1

Accessories list

1		Two In One Screw (6x28mm)	58pcs +4pcs
2		Two In One Nut (10x12mm)	58pcs +4pcs
3		Wood Chipping (6x30mm)	20pcs +2pcs
4		Non-slip pads (35x35x2mm)	4pcs +2pcs
5		Magnetic Attraction & Screw (3x12mm)	4pcs +1pcs / 2pcs
6		Sticker (L＝371mm Ø20mm)	4pcs +2pcs / 1pcs
7		Wire	1pcs
8		Hinge & Screw (3.5x12mm)	36pcs +4pcs / 6pcs
9		Handle & screw (4x22mm)	4pcs +2pcs / 2pcs
10		Fixing clip & screw (3x16mm)	8pcs +2pcs
11		Forked line	1pcs
12		anti-tipping tape Screw & gasket (3.5x12mm) Screw (4x45mm)	1pcs 1pcs 2pcs 1pcs 1pcs
13		Magnetic Attraction & Screw (3x12mm)	4pcs +2pcs / 4pcs
14		Wire Clamp	3pcs +1pcs
15		Foot nail	6pcs +2pcs
		AC/DC Adapter(12V 2.0A)	1pcs




1pcs Double-head screwdriver, use as required

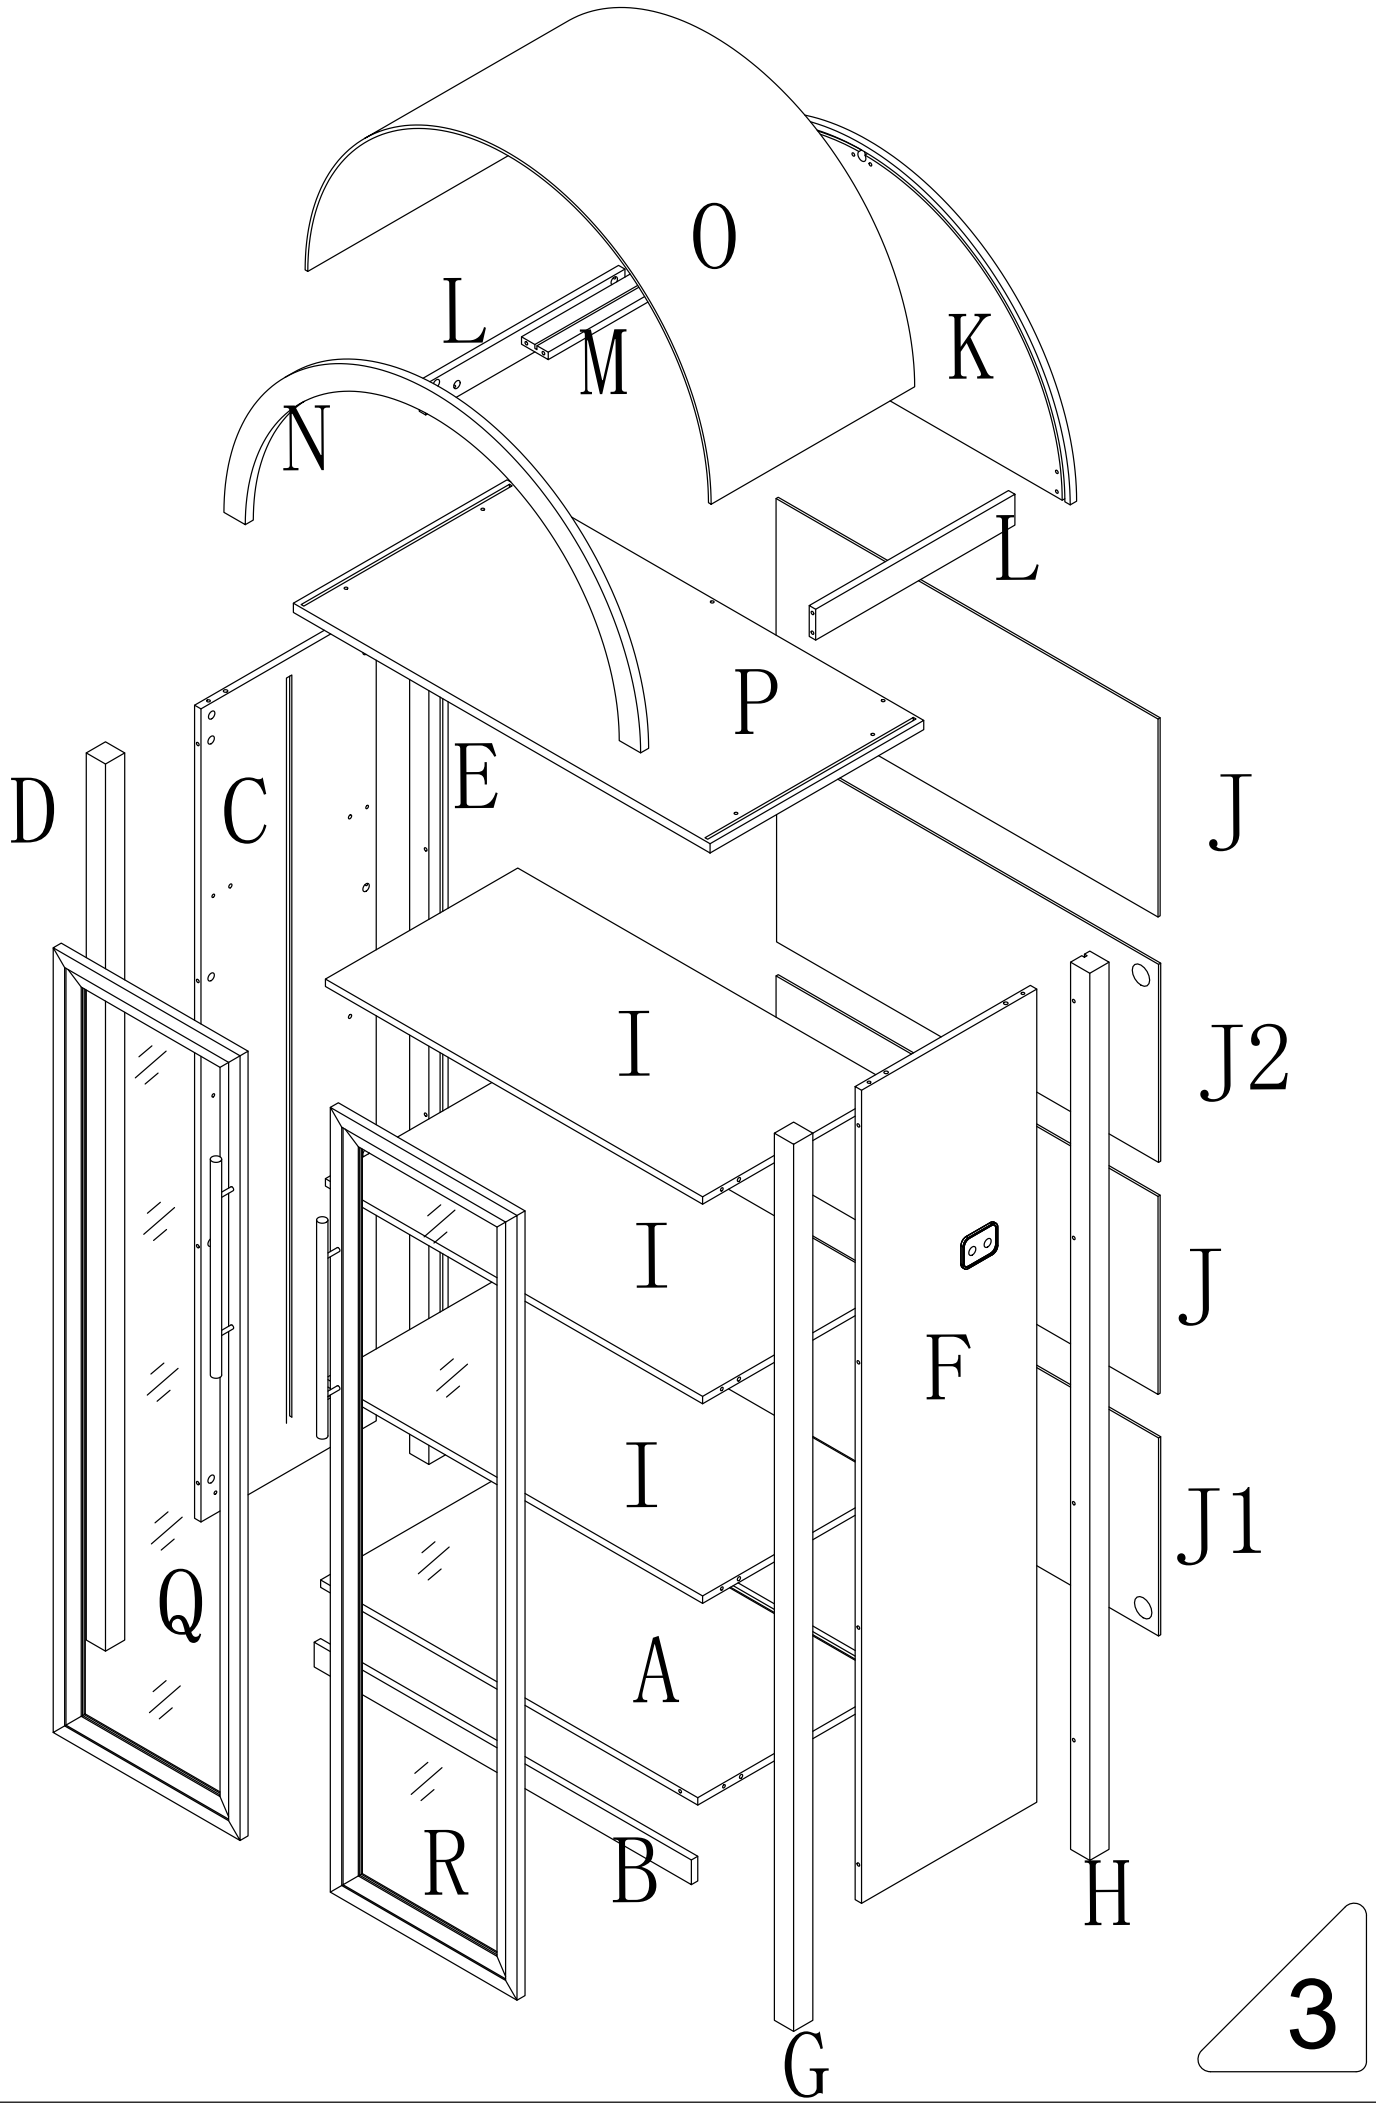

O
L
M
K
N
L
P
D
C
E
J
I
J2
I
J
F
I
J1
Q
A
R
B
H
G

Use parts A and B


Step1

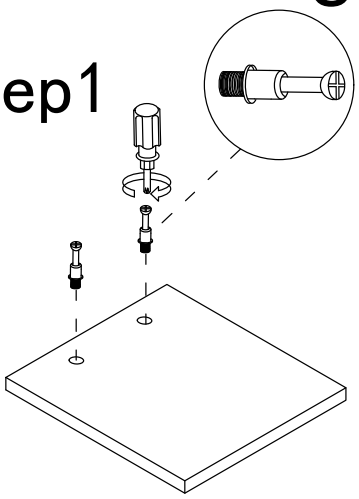


Step2

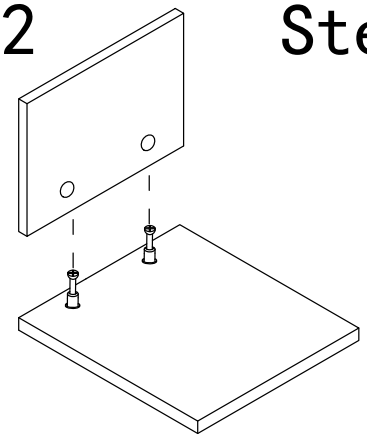


Step3

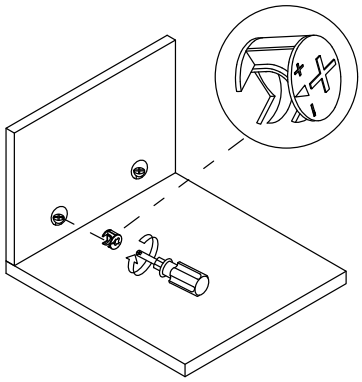

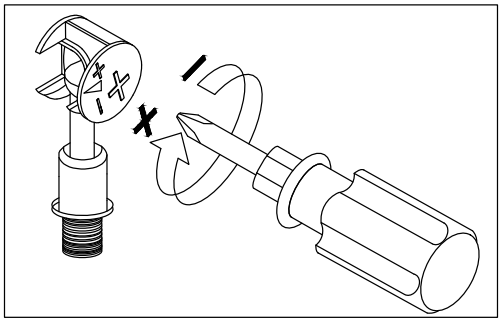



Use a screwdriver to lock in the direction of the "+" sign

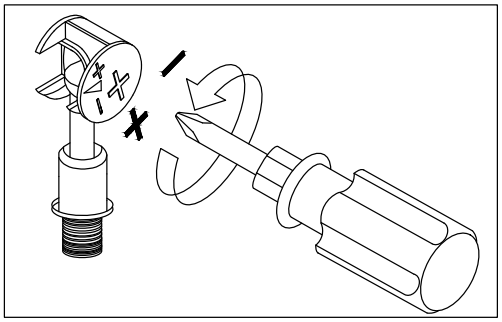

Disassemble along the direction of "-" sign


Step 1



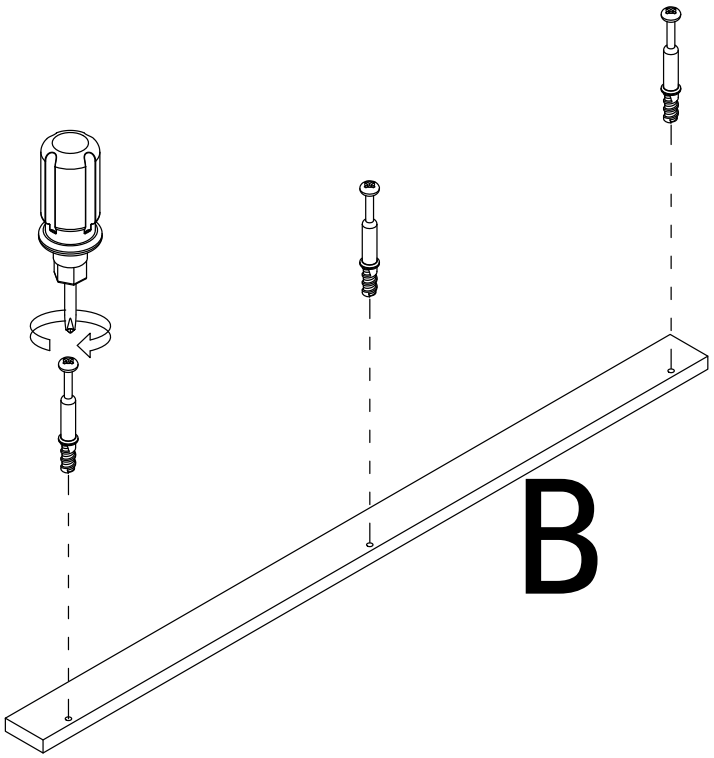


Step 2

2 x3

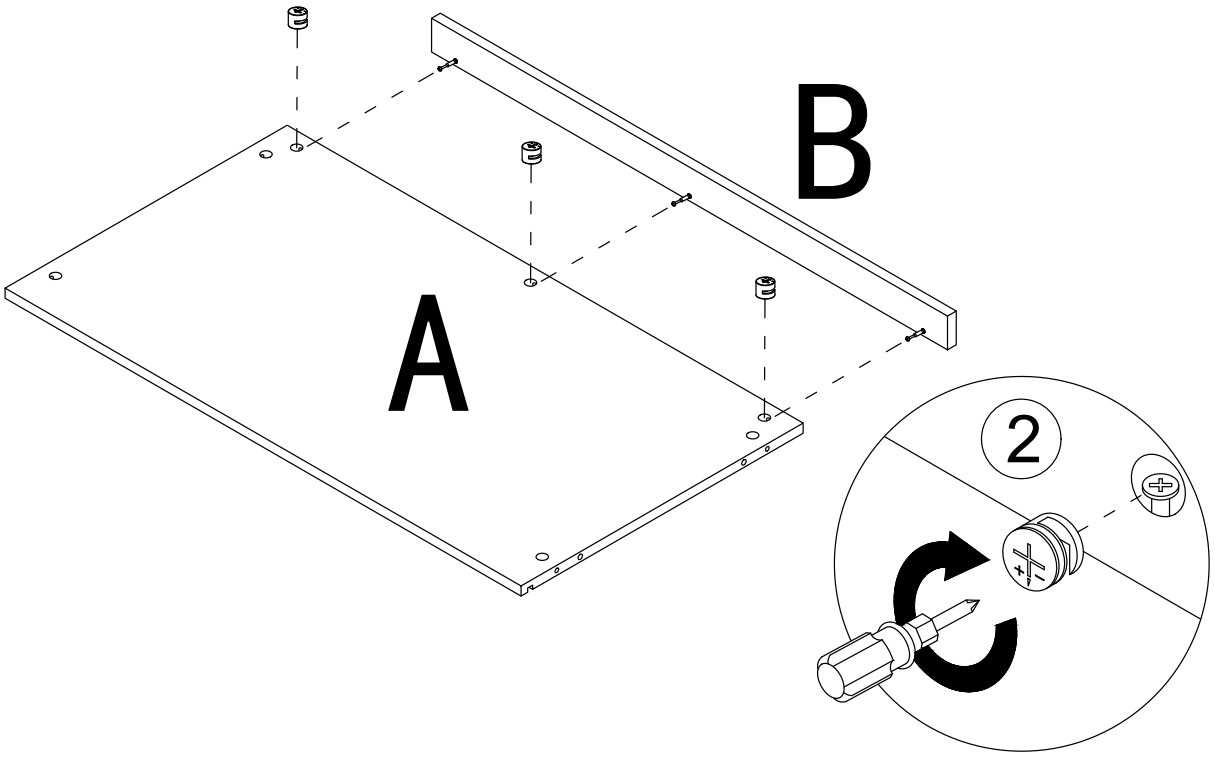



Step 3

1 x4

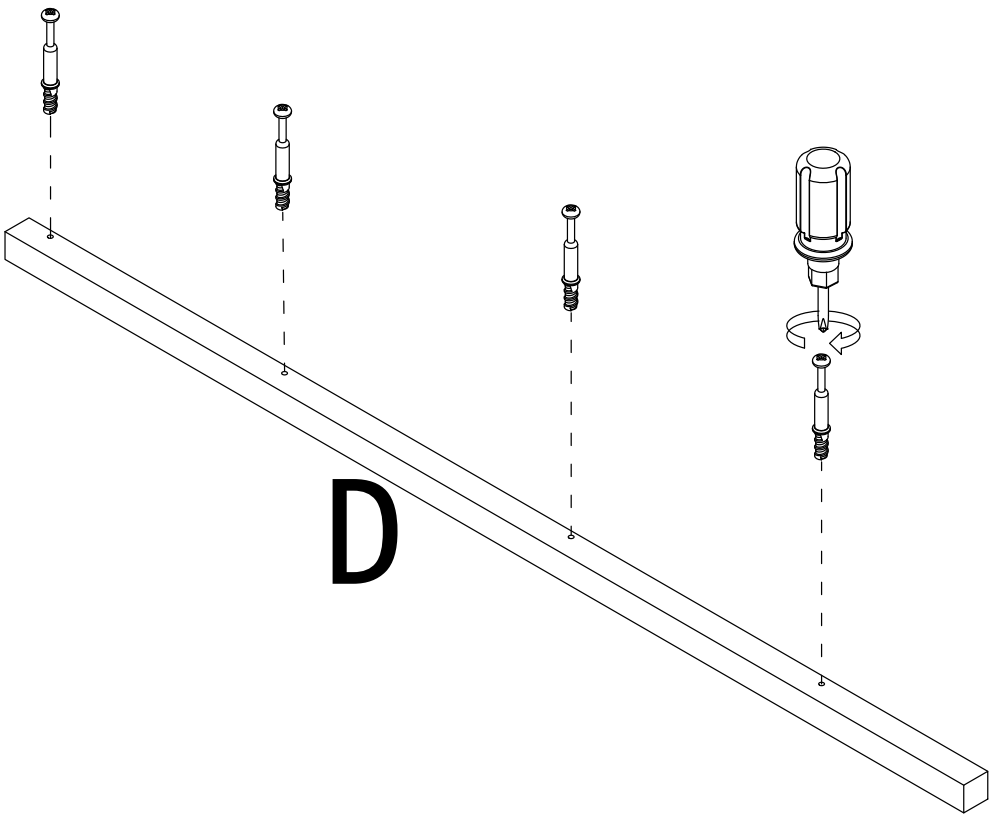



Step 4



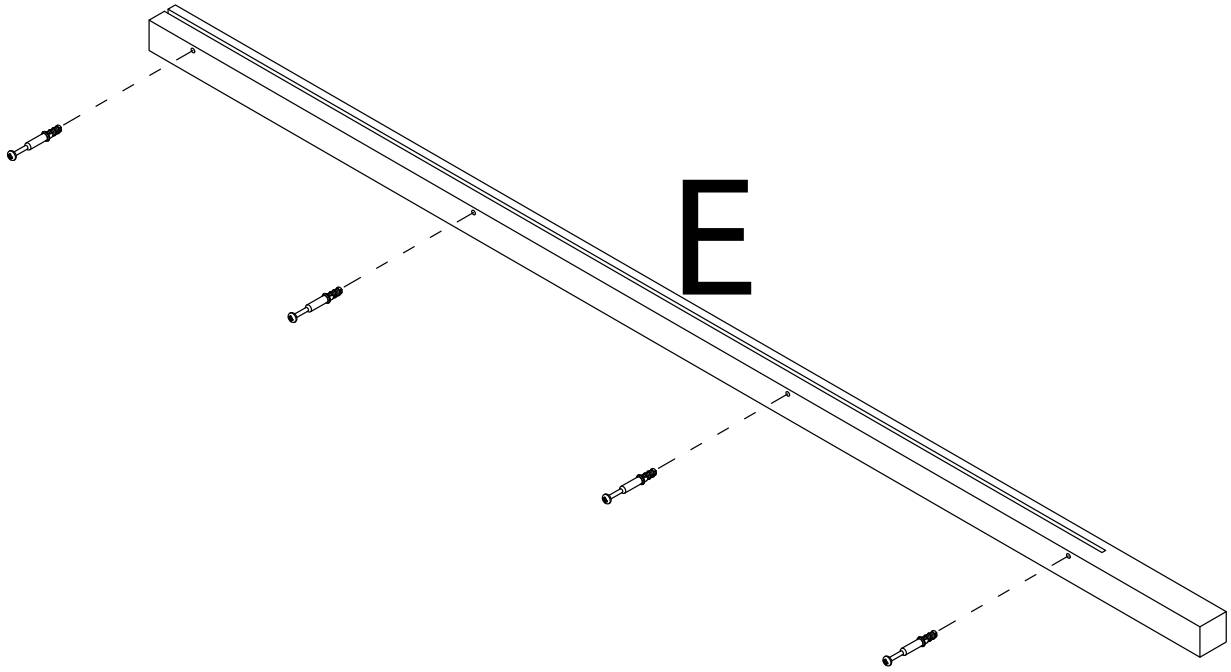


Step 5



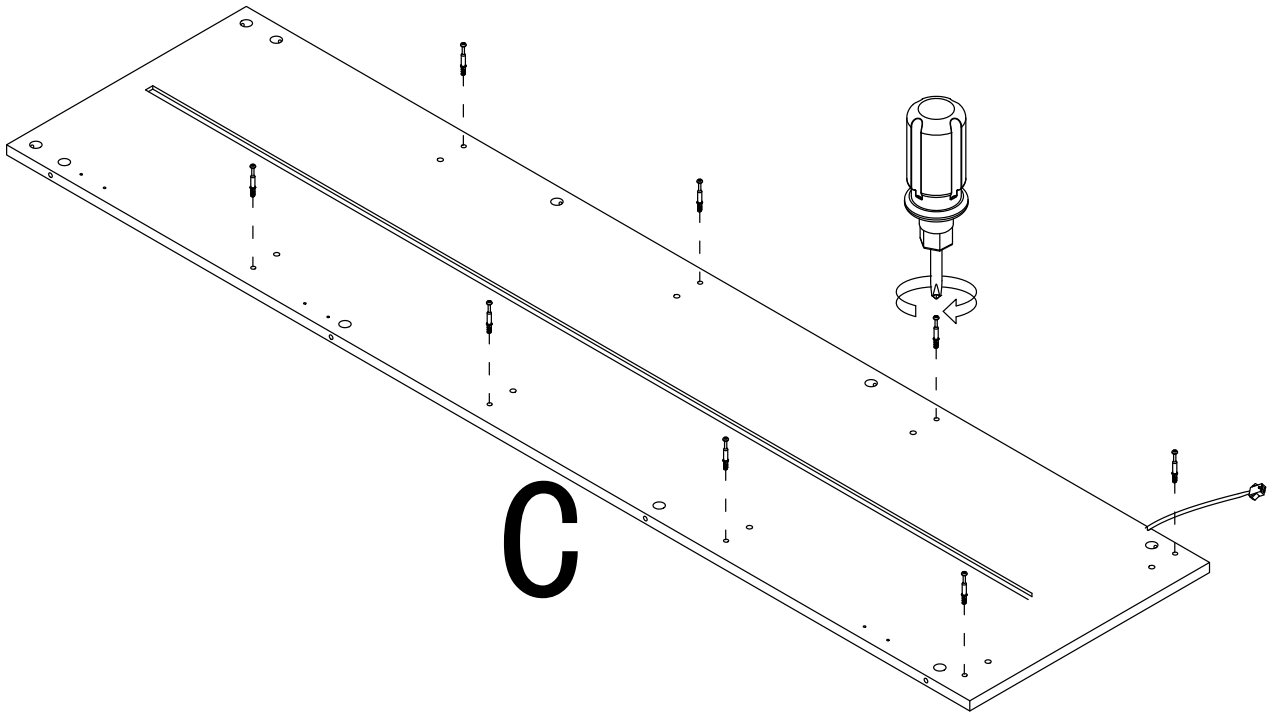


Step 6

2 x8

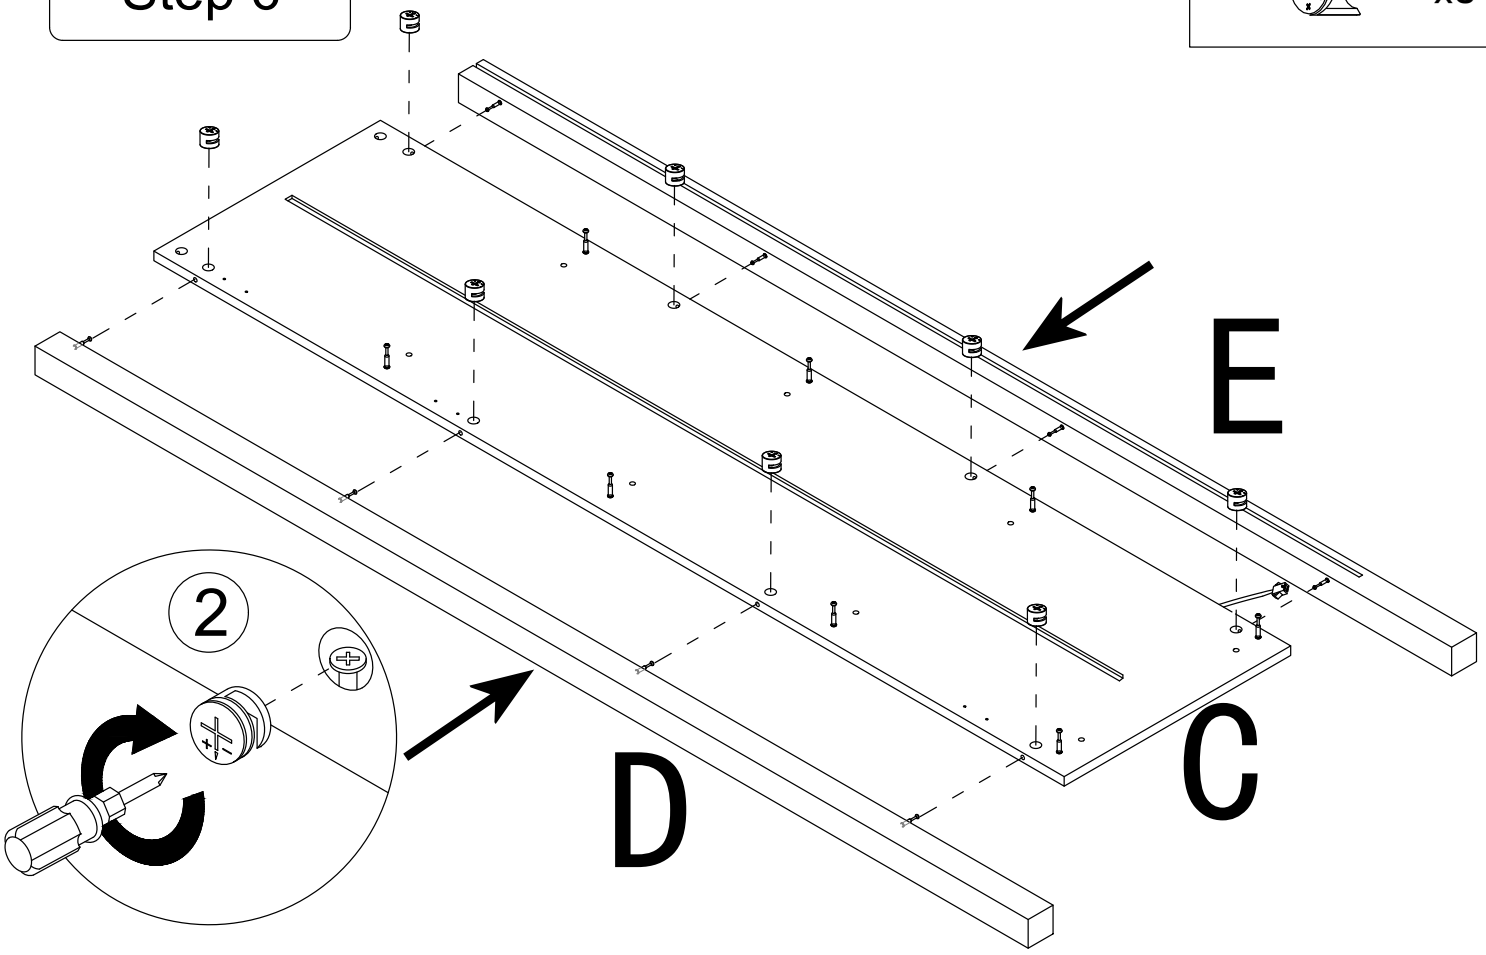


Step 7

3 x8

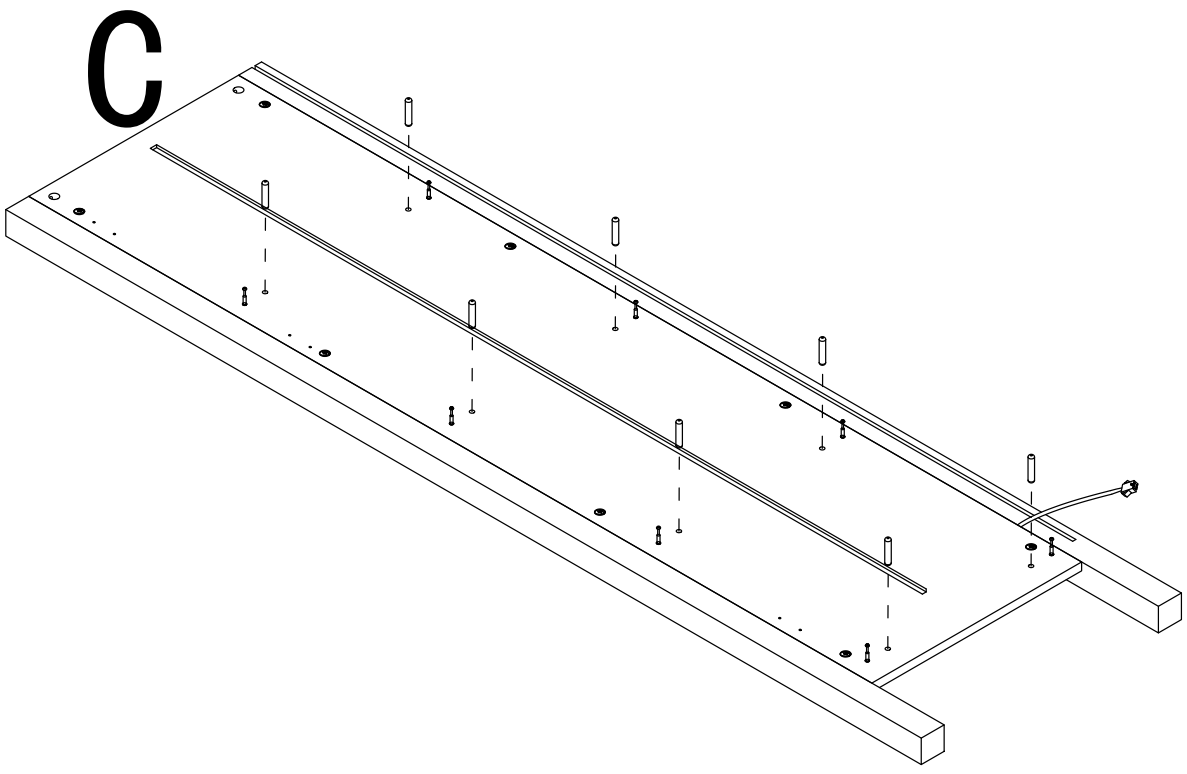

Step 8


2 x8

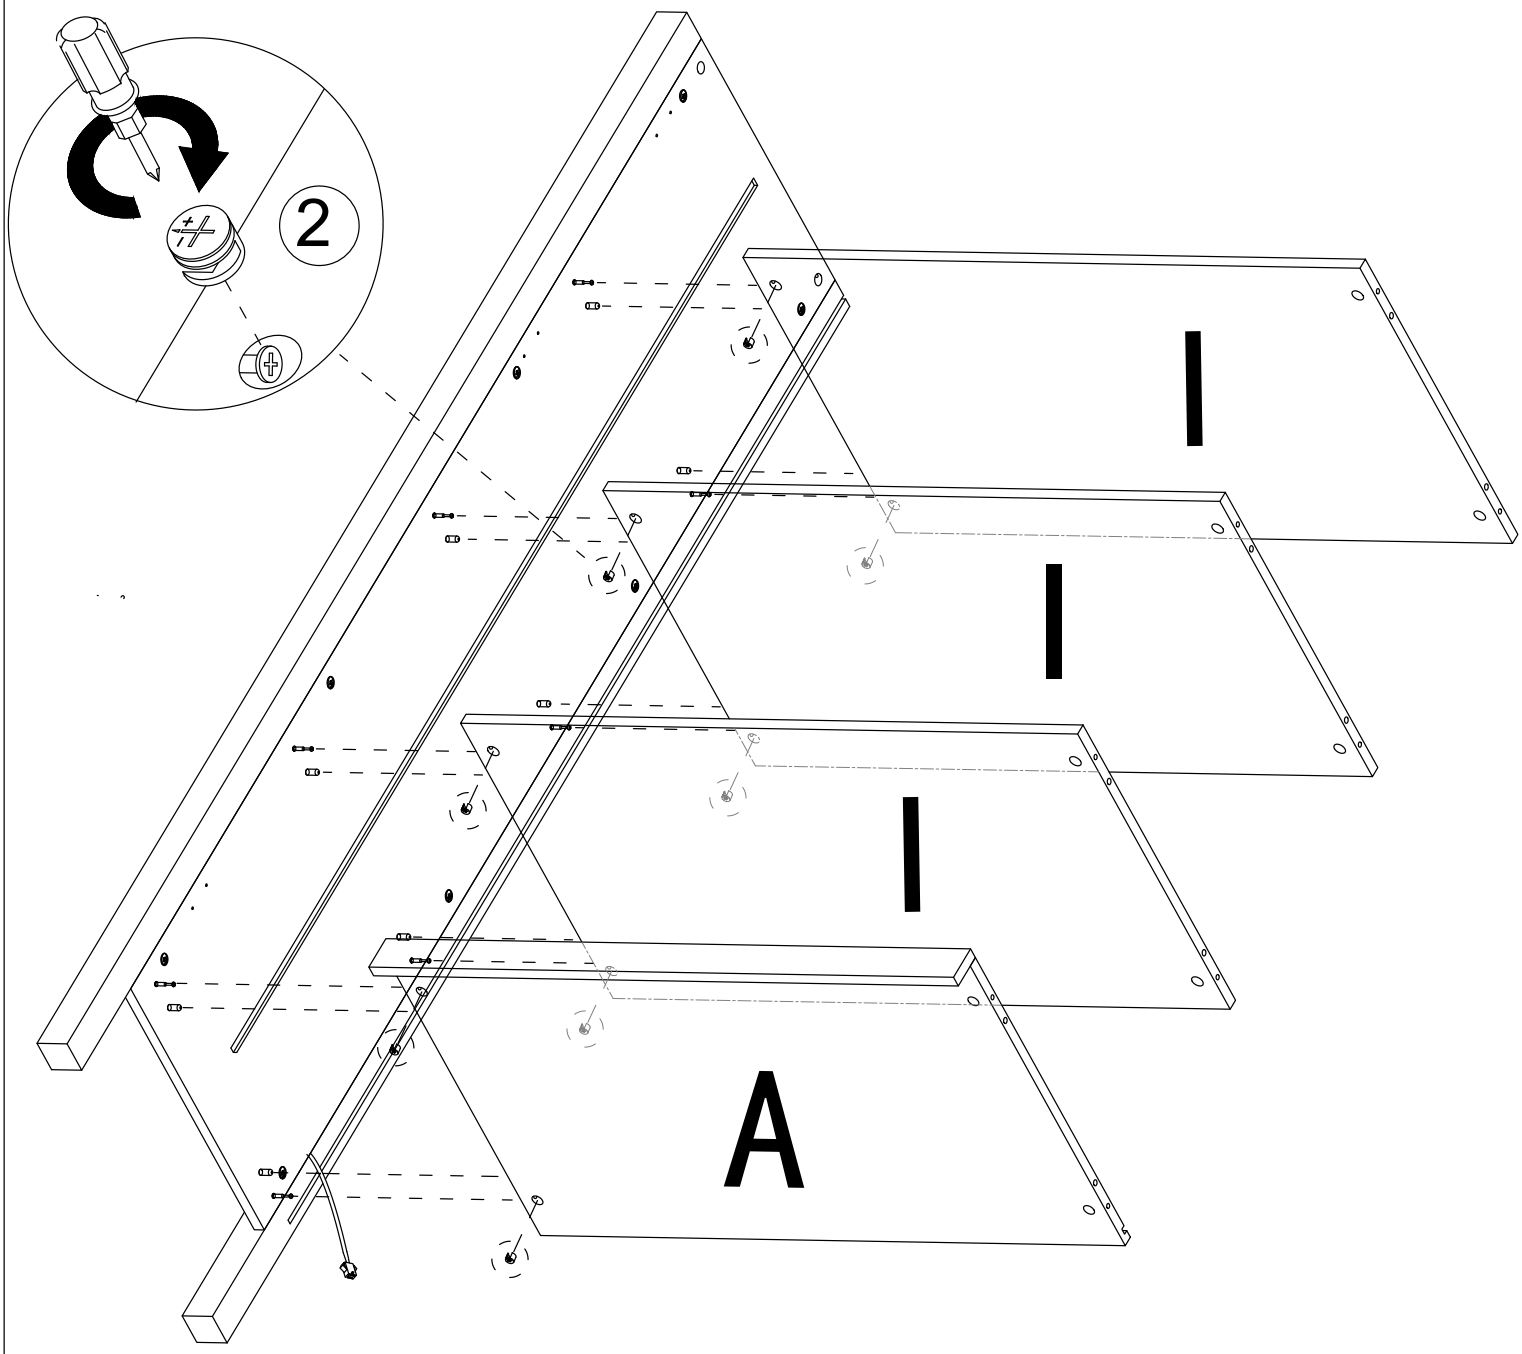


Step 9


3

x8

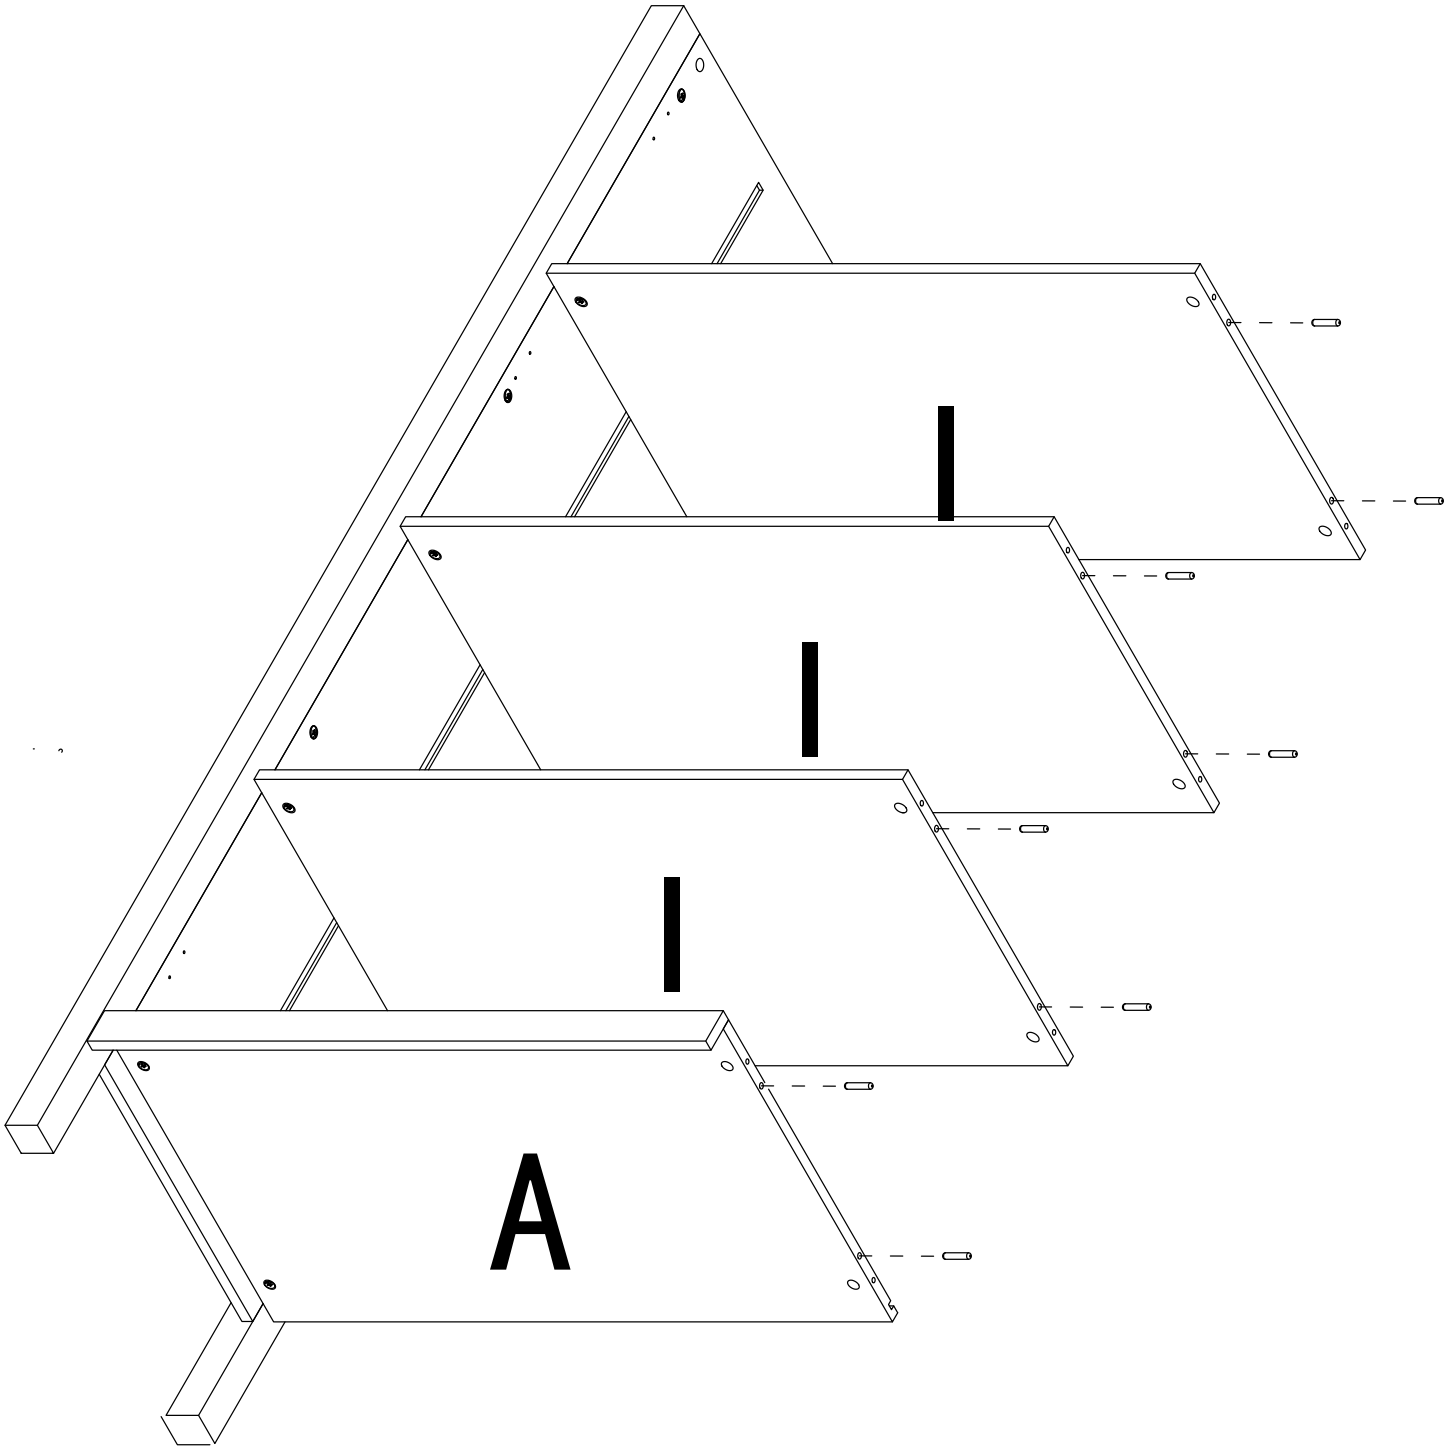



Step 10

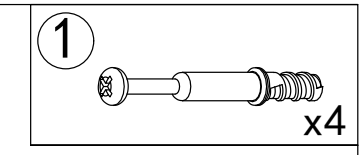

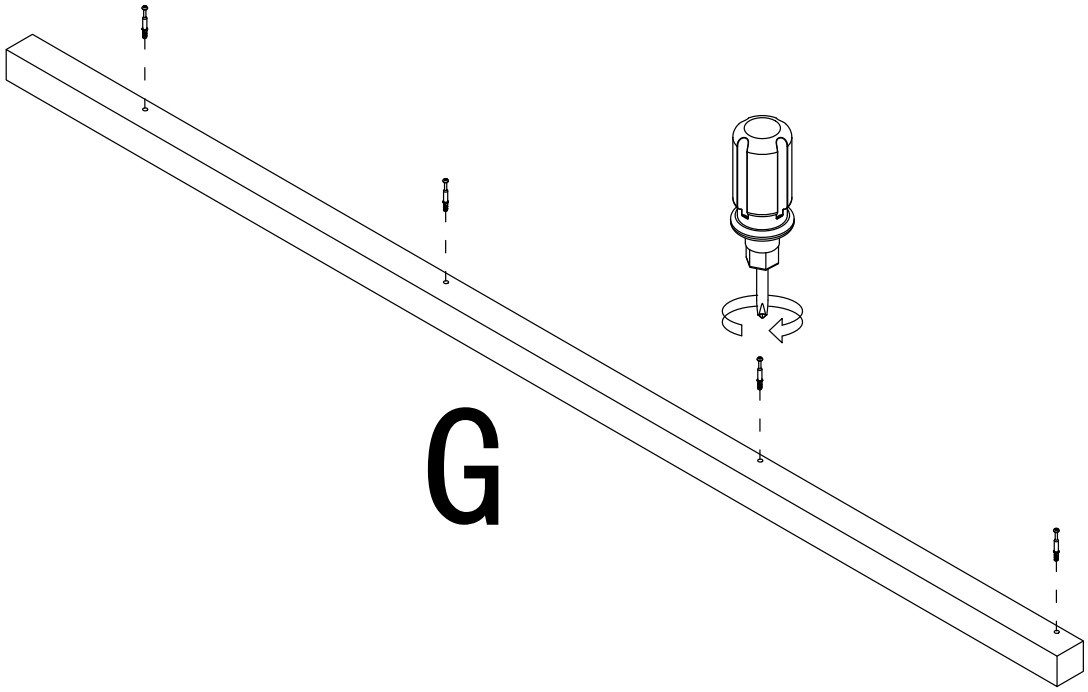



Step 11

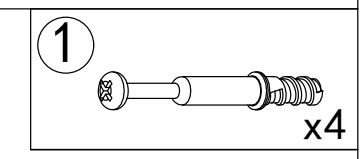

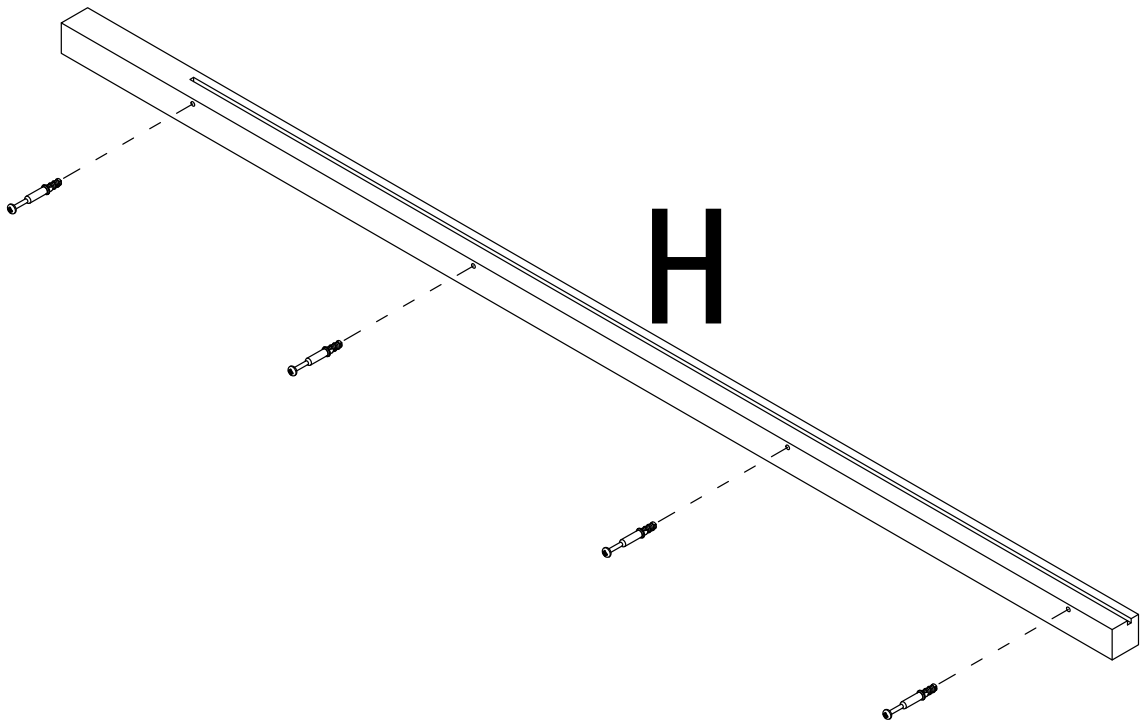



Step 12



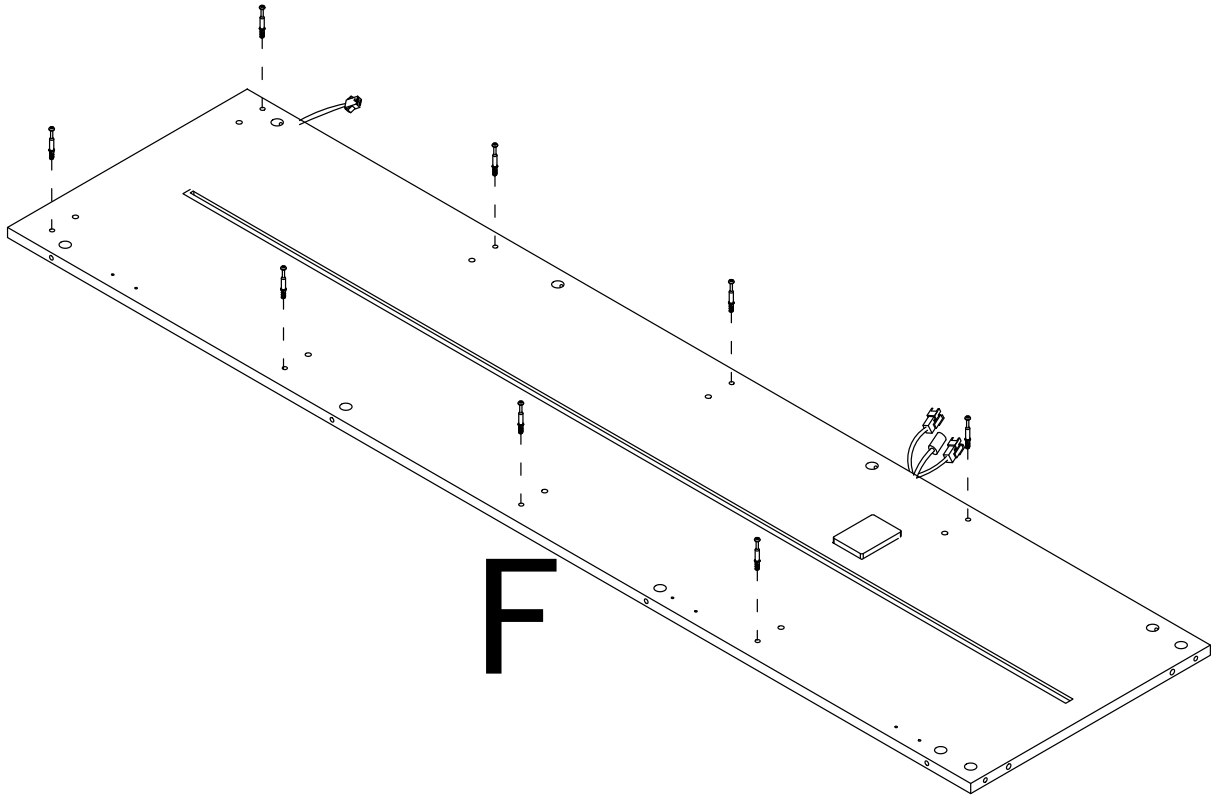

Step 13




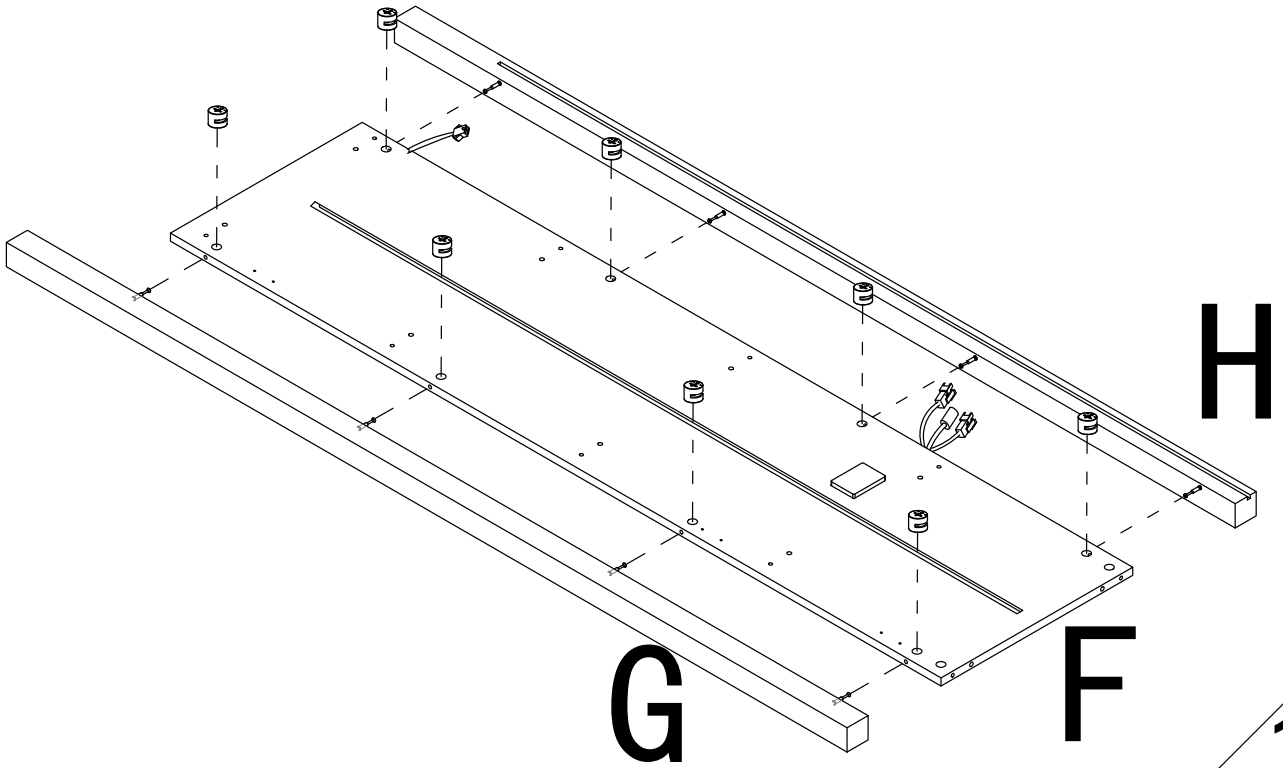

Step 14


2 x8

Please lay all panels flat during installation.

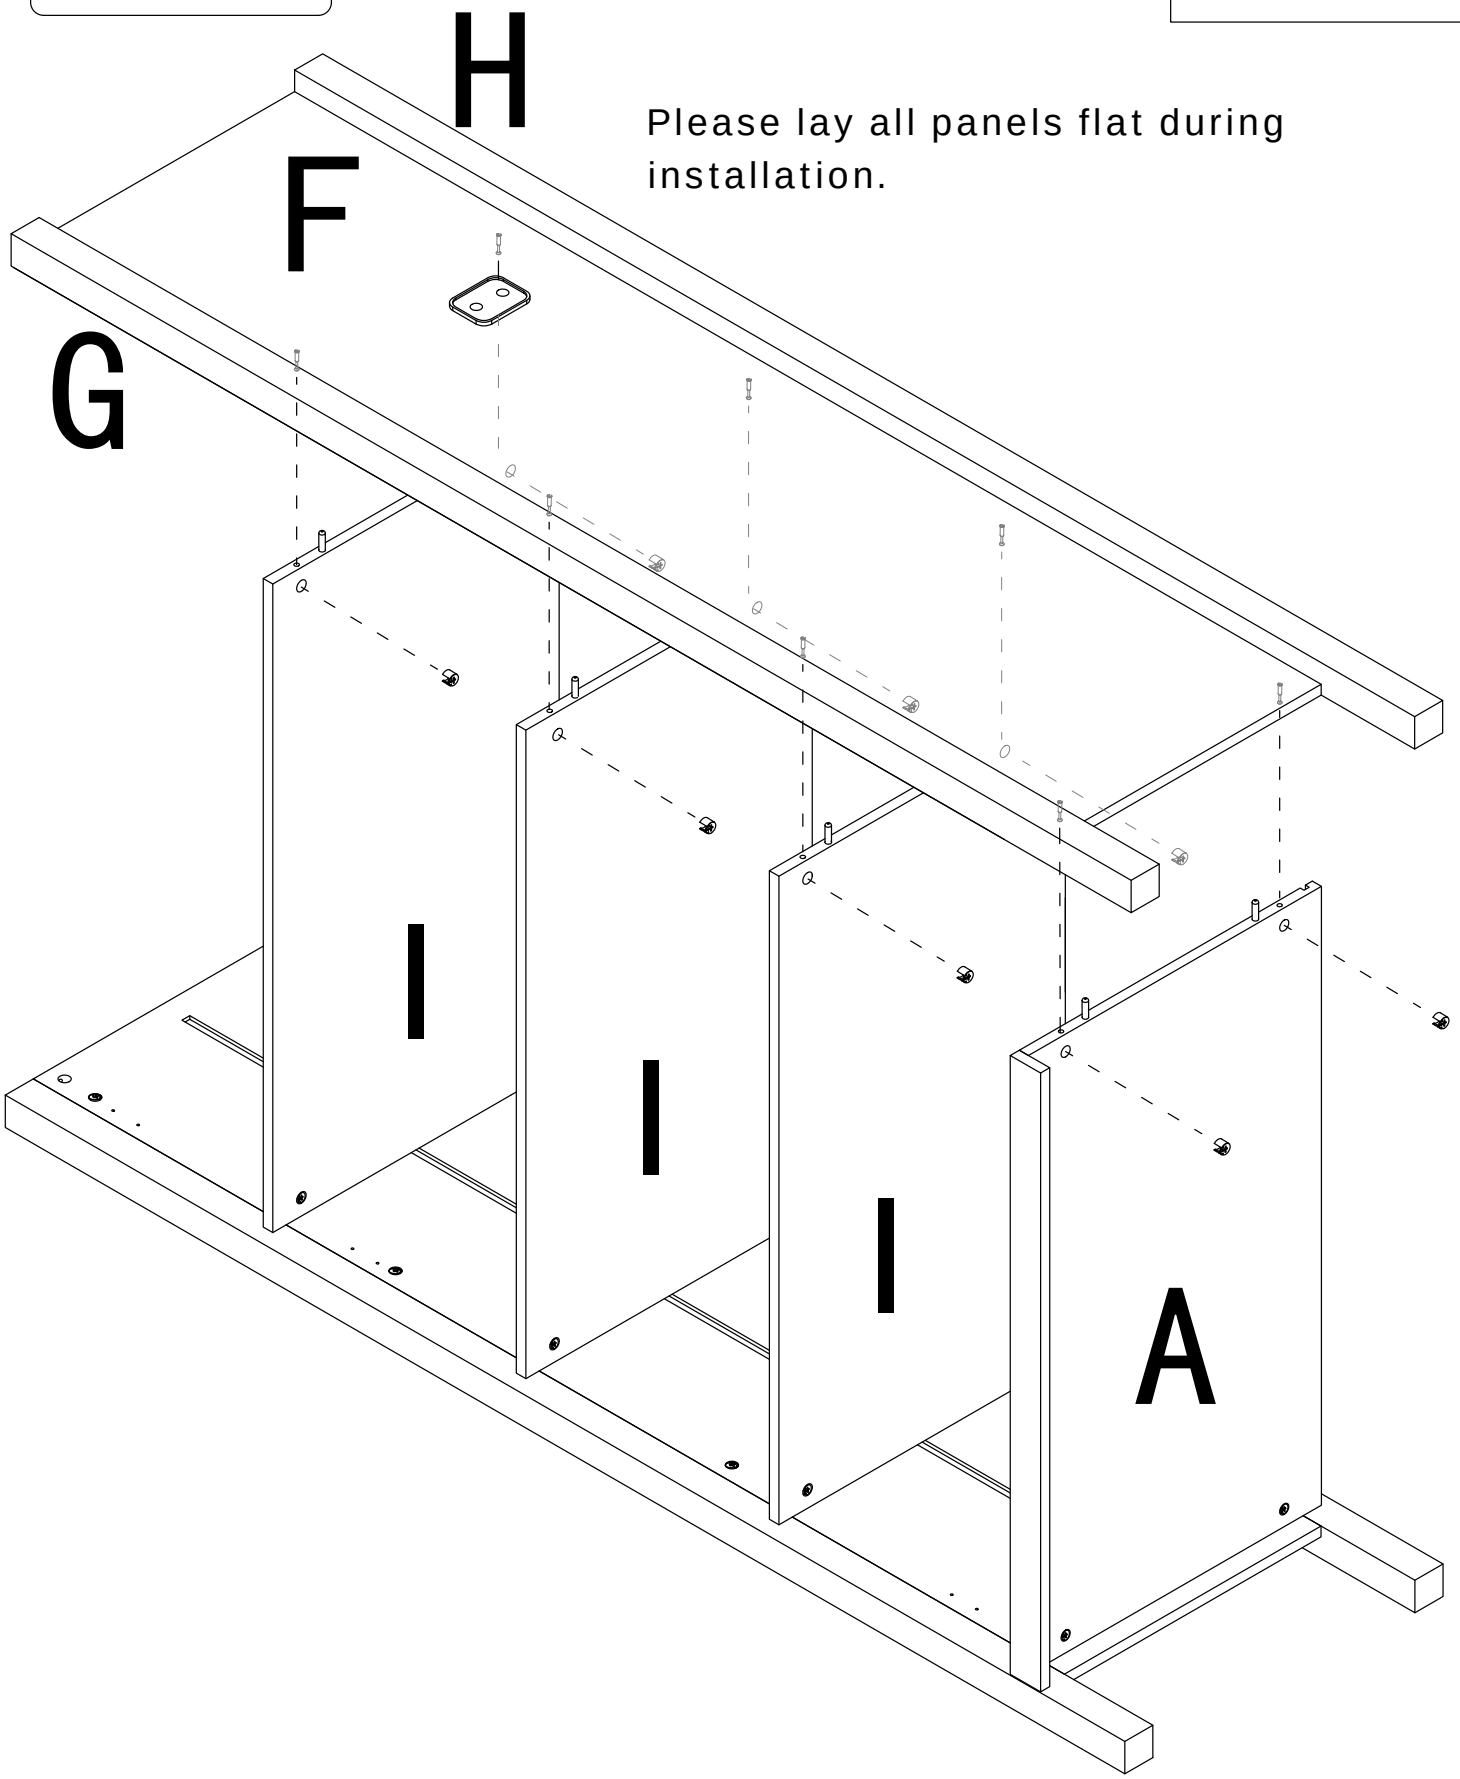


Step 15

④ x4

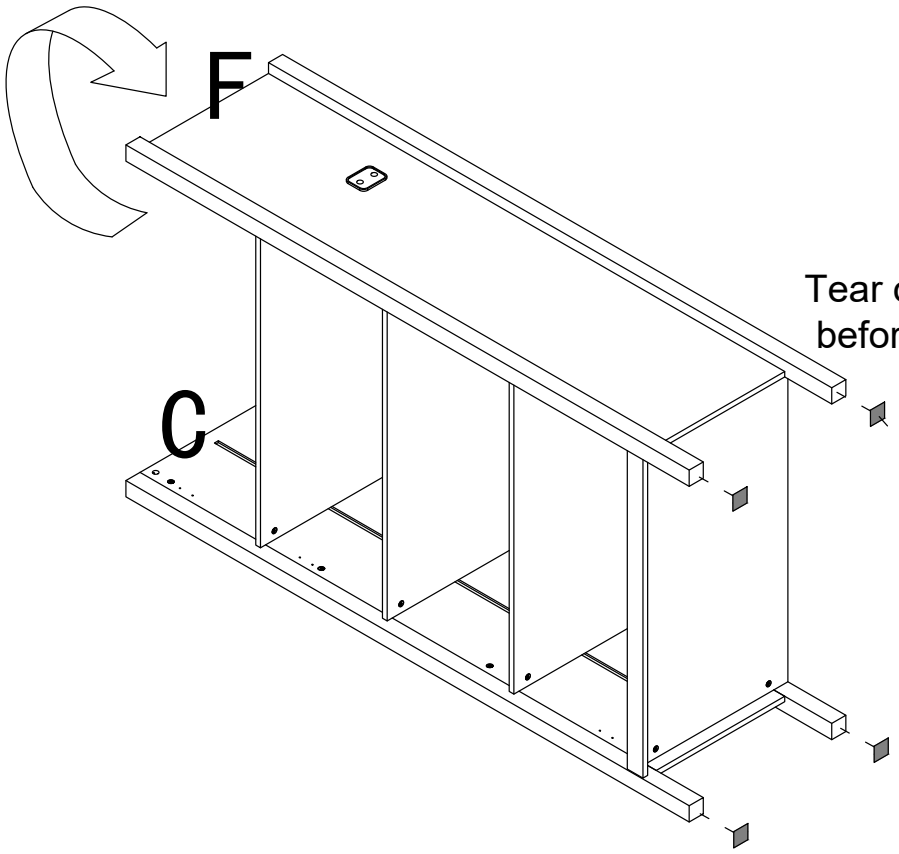

Tear off the protective film before installation




Step 16


③ x4

⑤ x1


x2

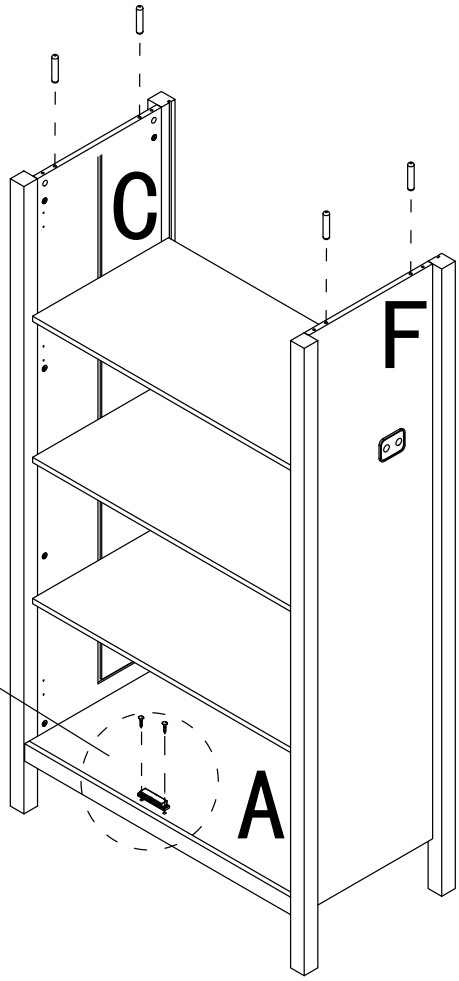

Pay attention to the orientation

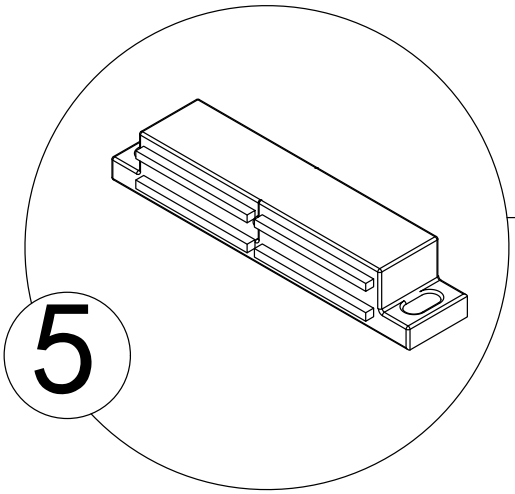


Step 17

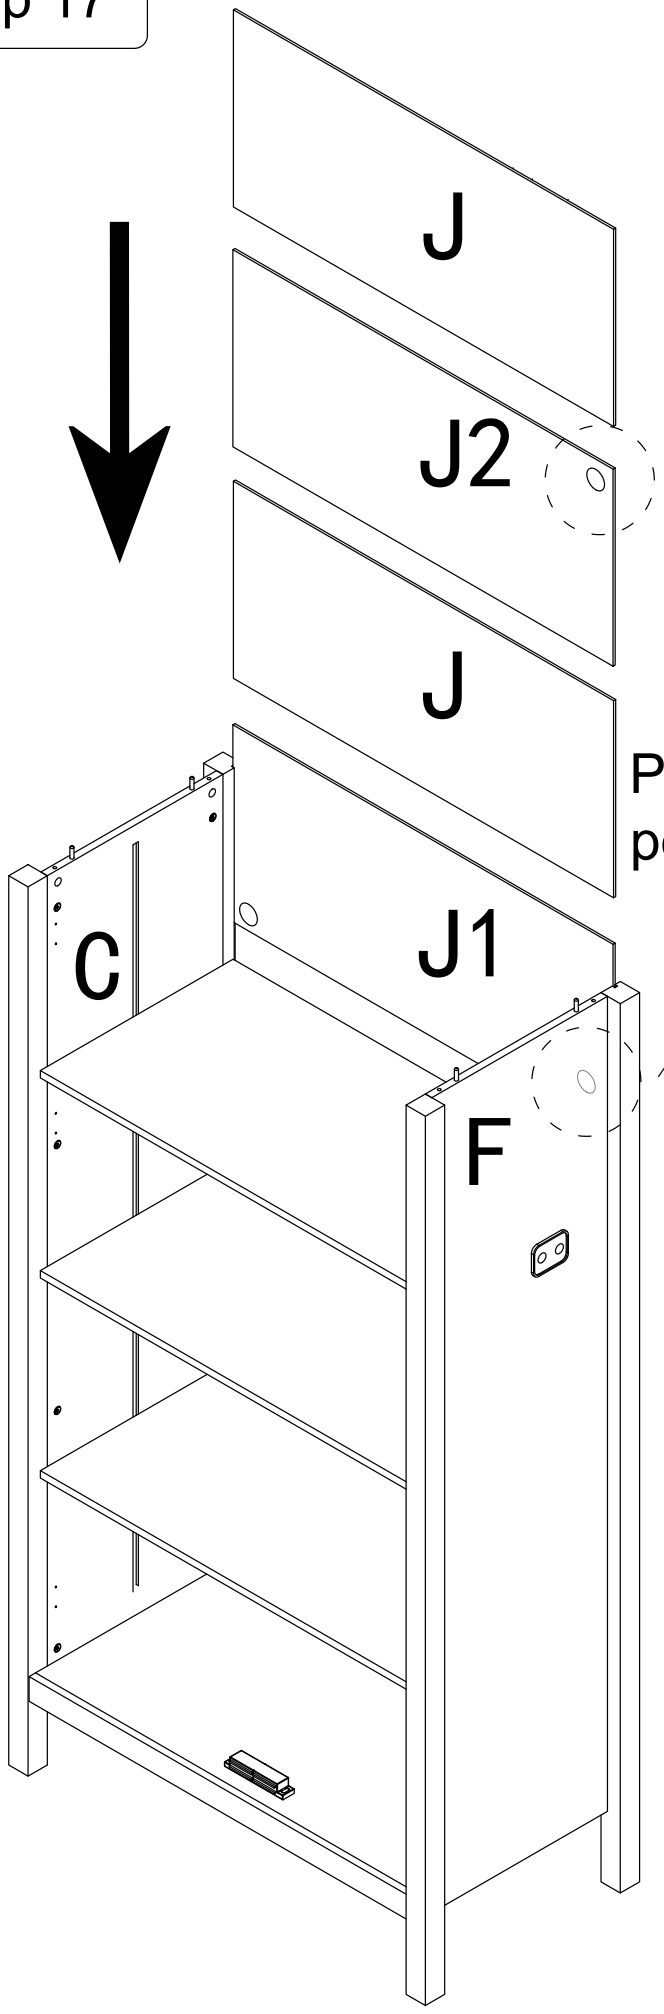

Please pay attention to the position of the outlet hole


Step 18

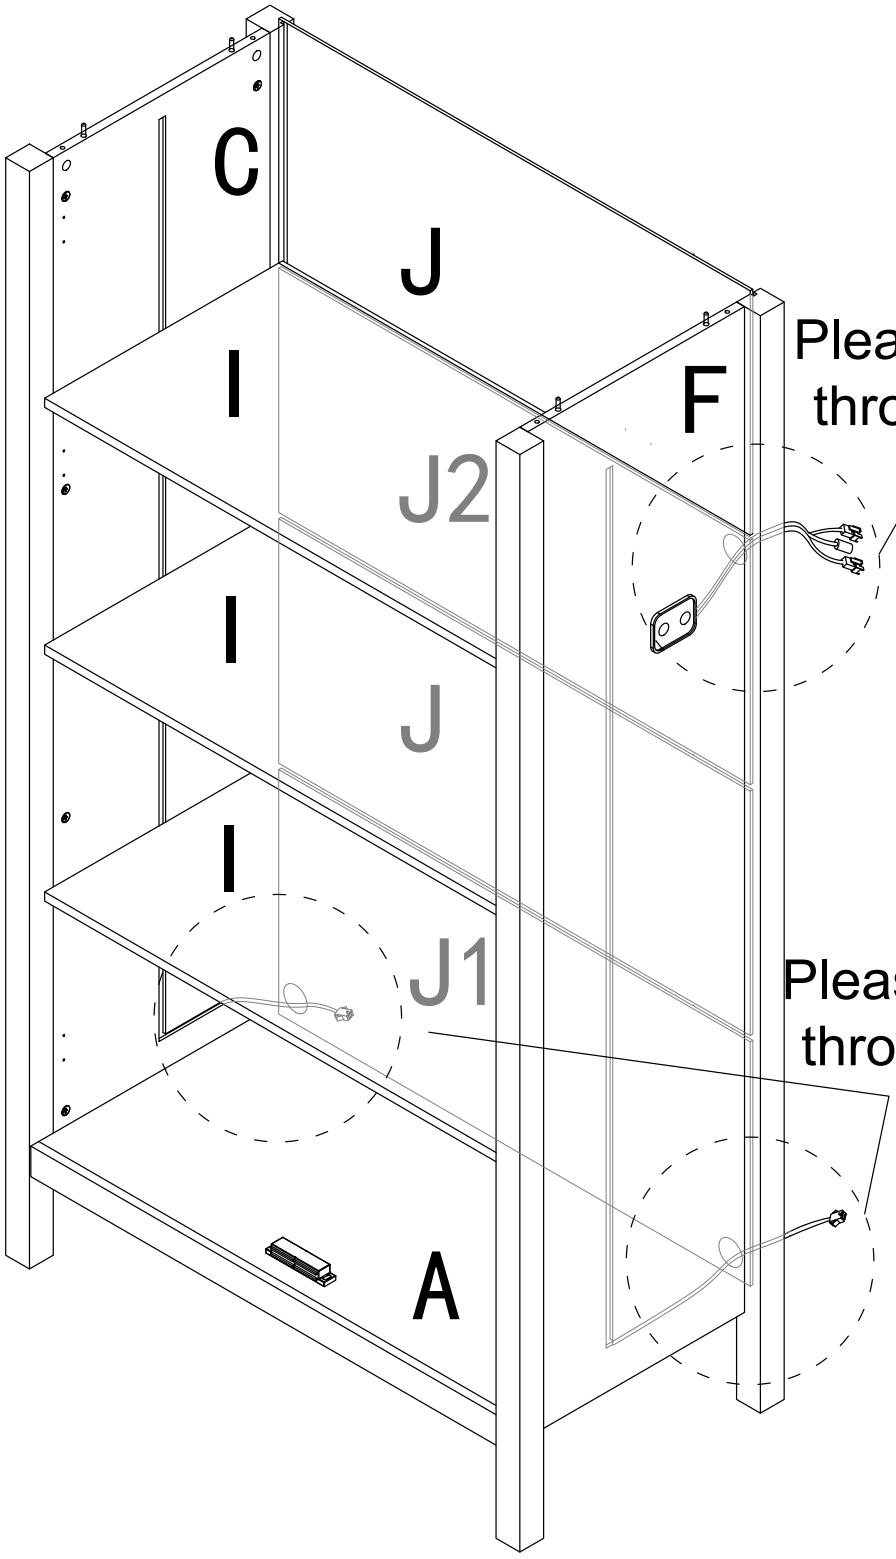


Please thread the light wire through the J2 board outlet

Please thread the light wire through the J1 board outlet


Step 19




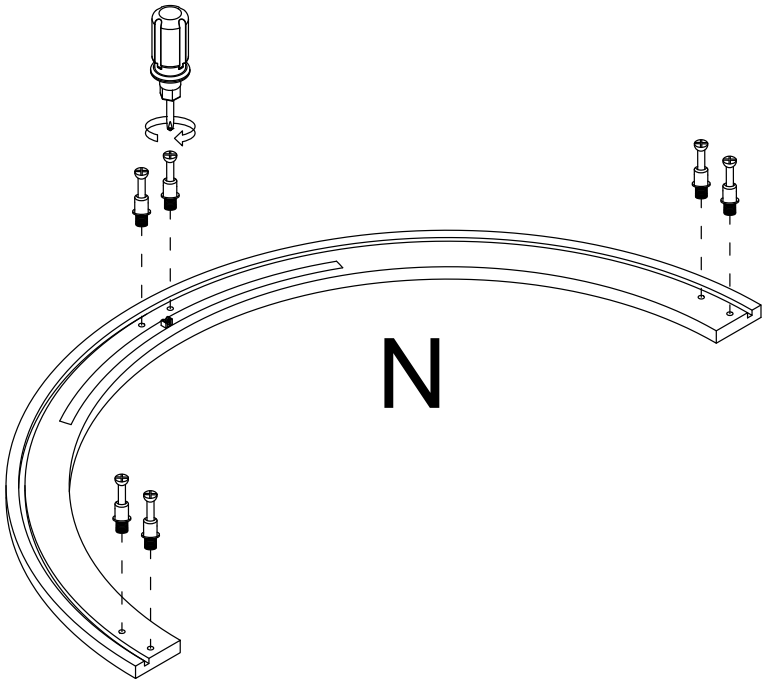

Step 20


Connect the light cable socket



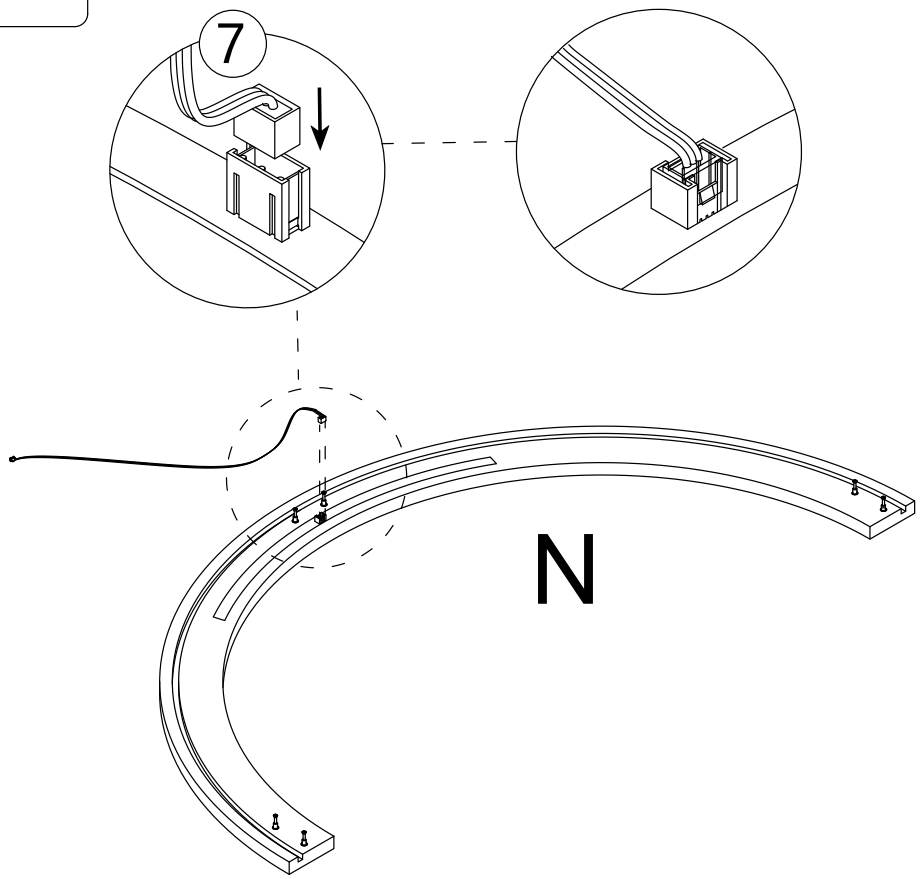

Step 21


2 x6

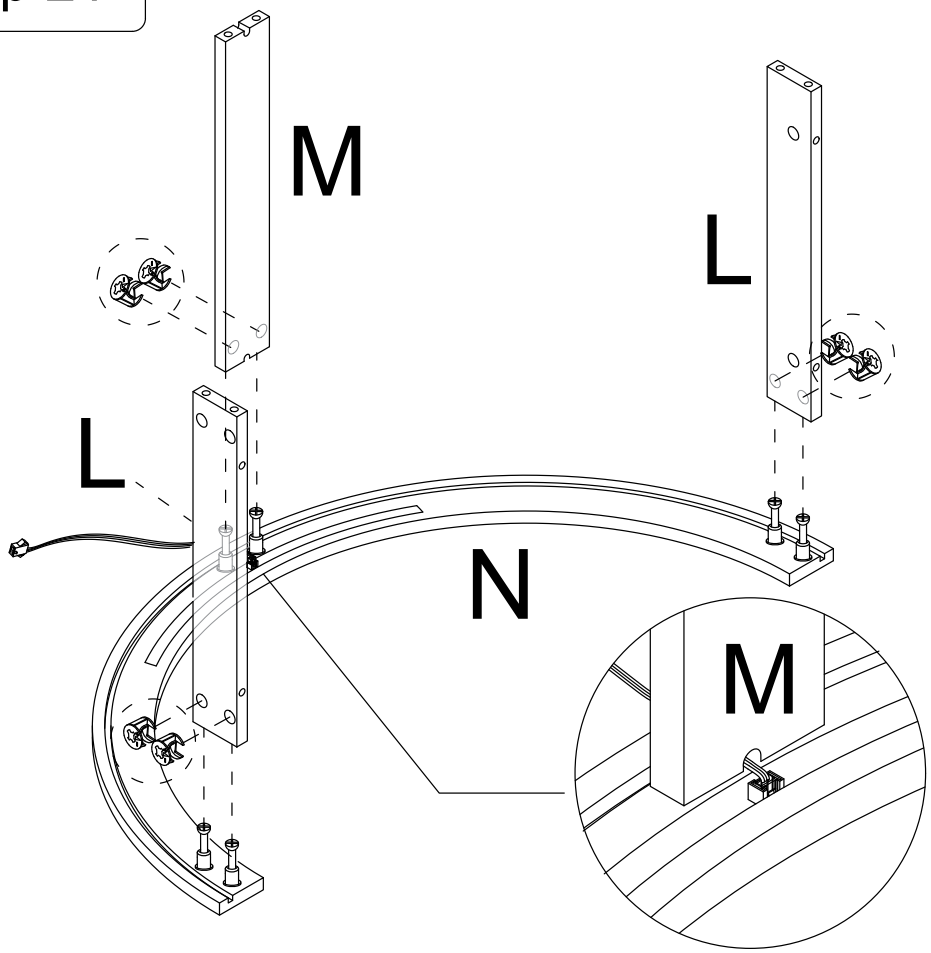

Thread the light wire through board M and tighten the nut


Step 22


6 x1

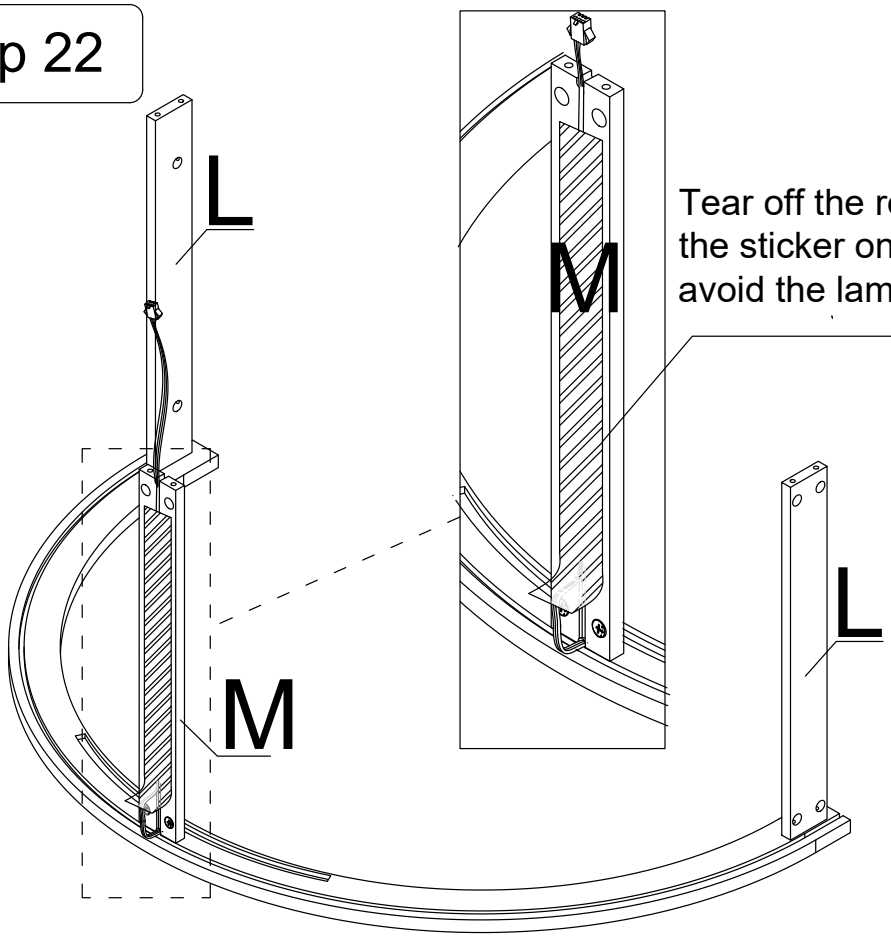

Tear off the release paper and stick the sticker on the M-plate lamp slot to avoid the lamp wire from falling off.


Step 23

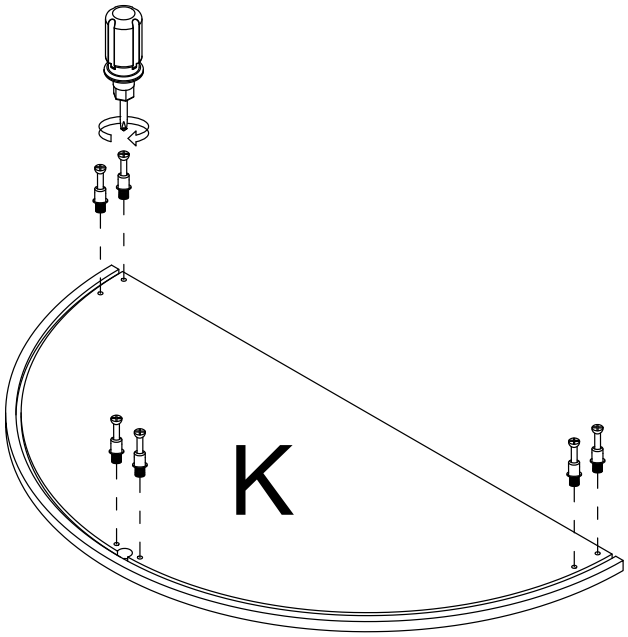





Step 24

Passing through the hole of plate K

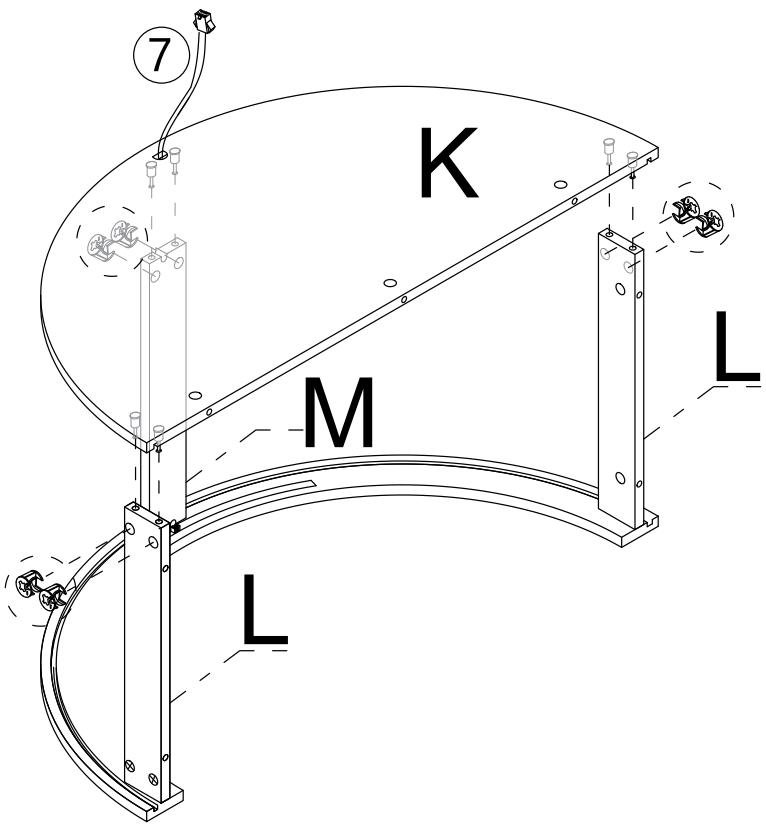




Note：

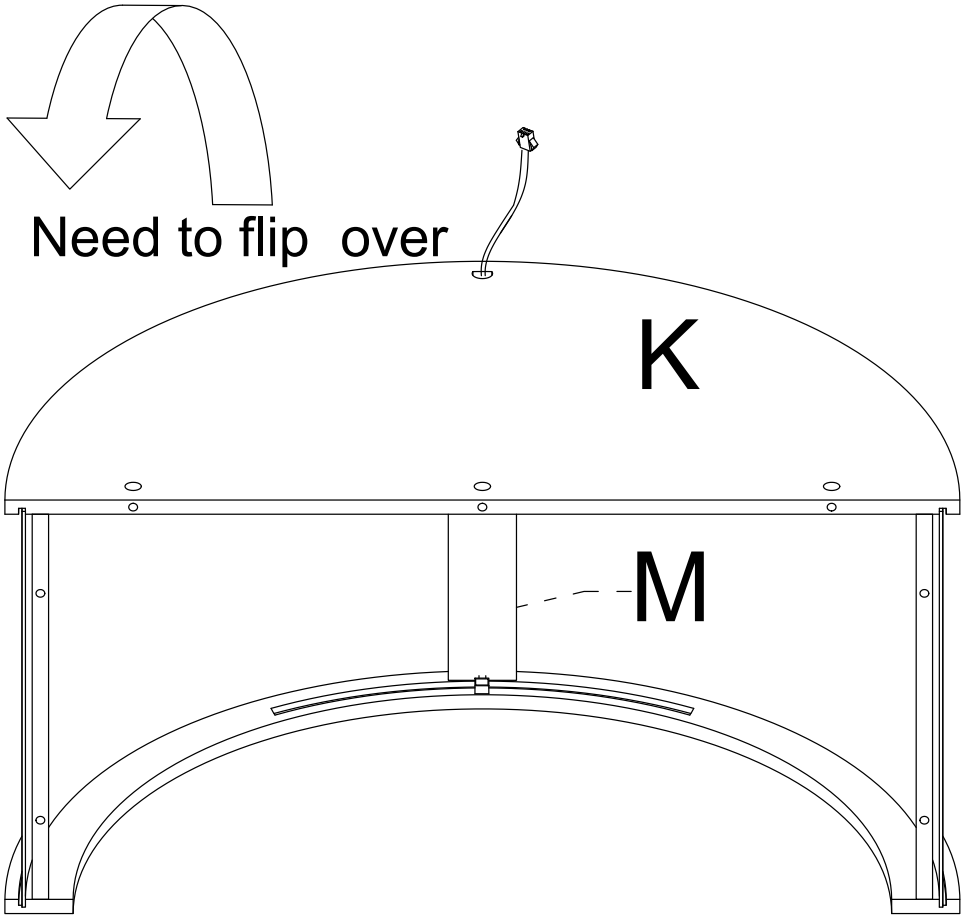


Note: When installing the O plate, push the middle of the O plate by hand to push the O plate into the groove.

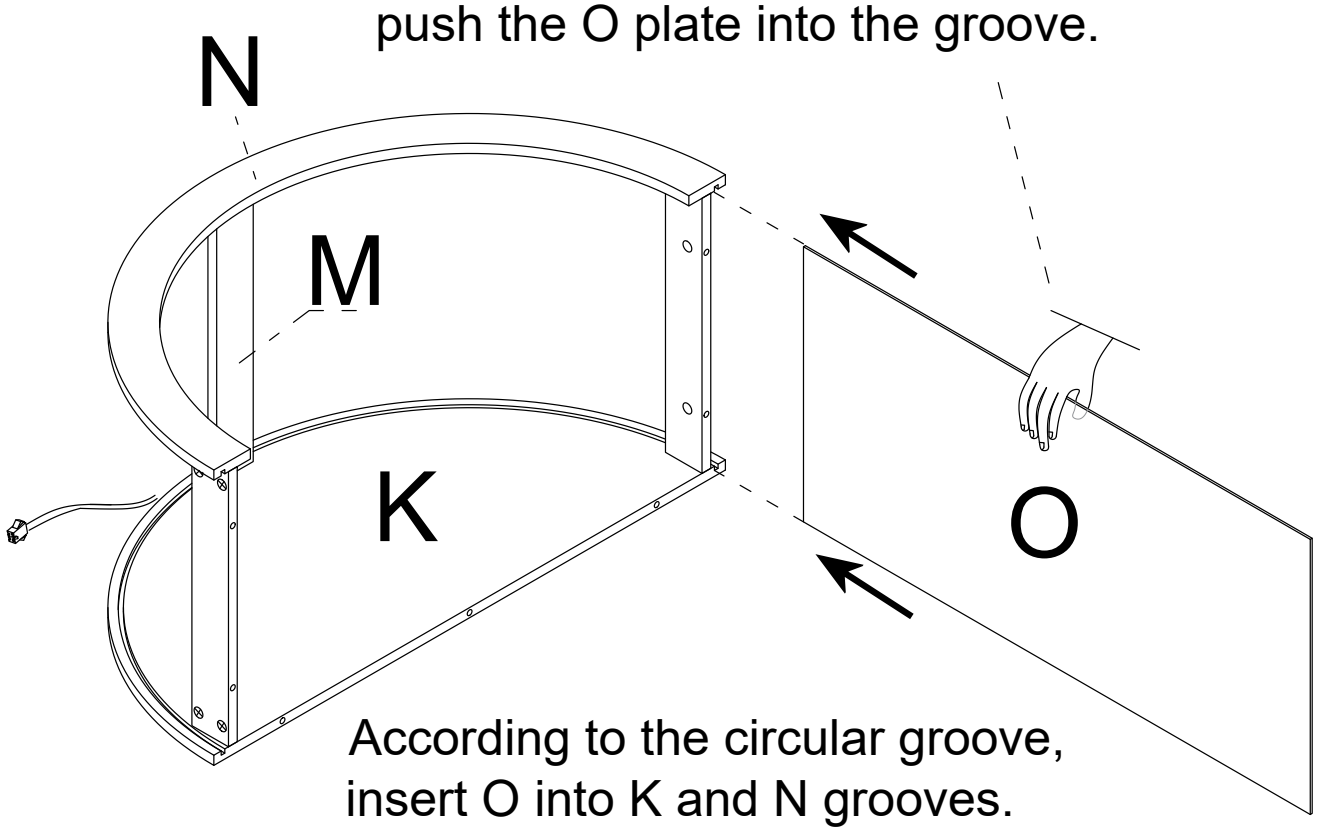


According to the circular groove, insert O into K and N grooves.


Note：

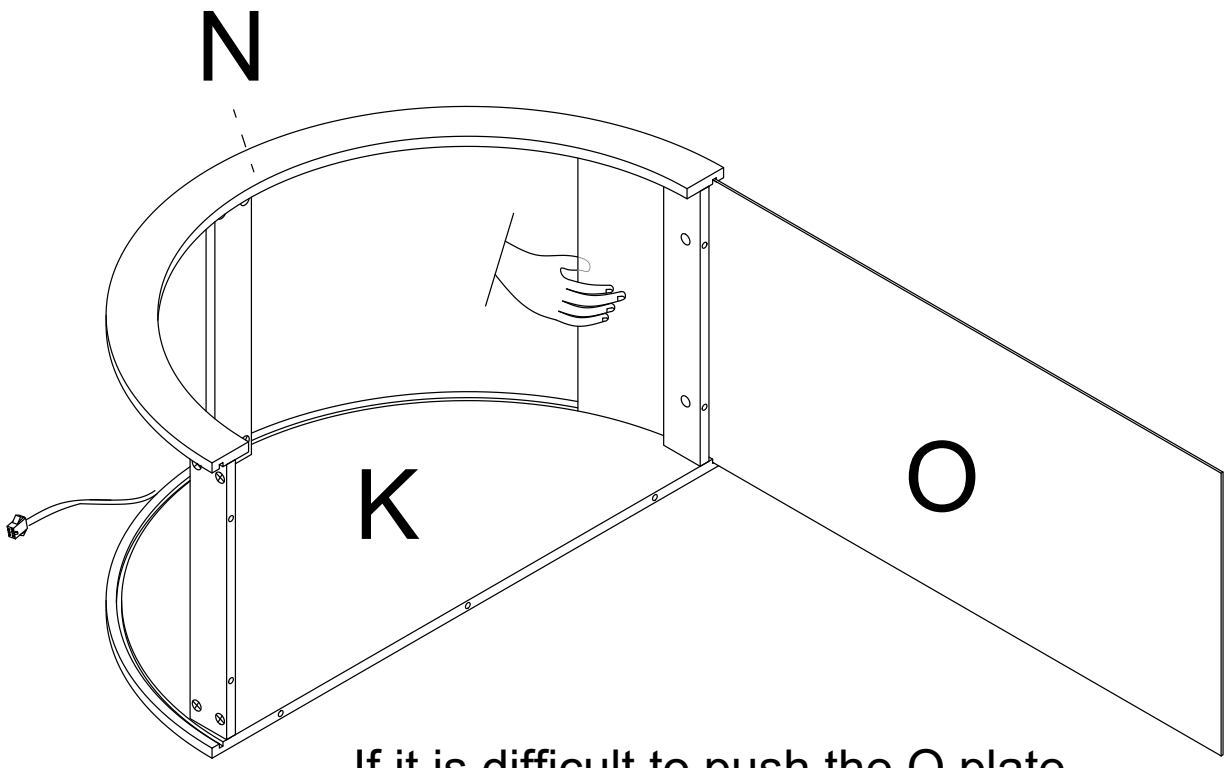

If it is difficult to push the O plate in, you can use the pull method.

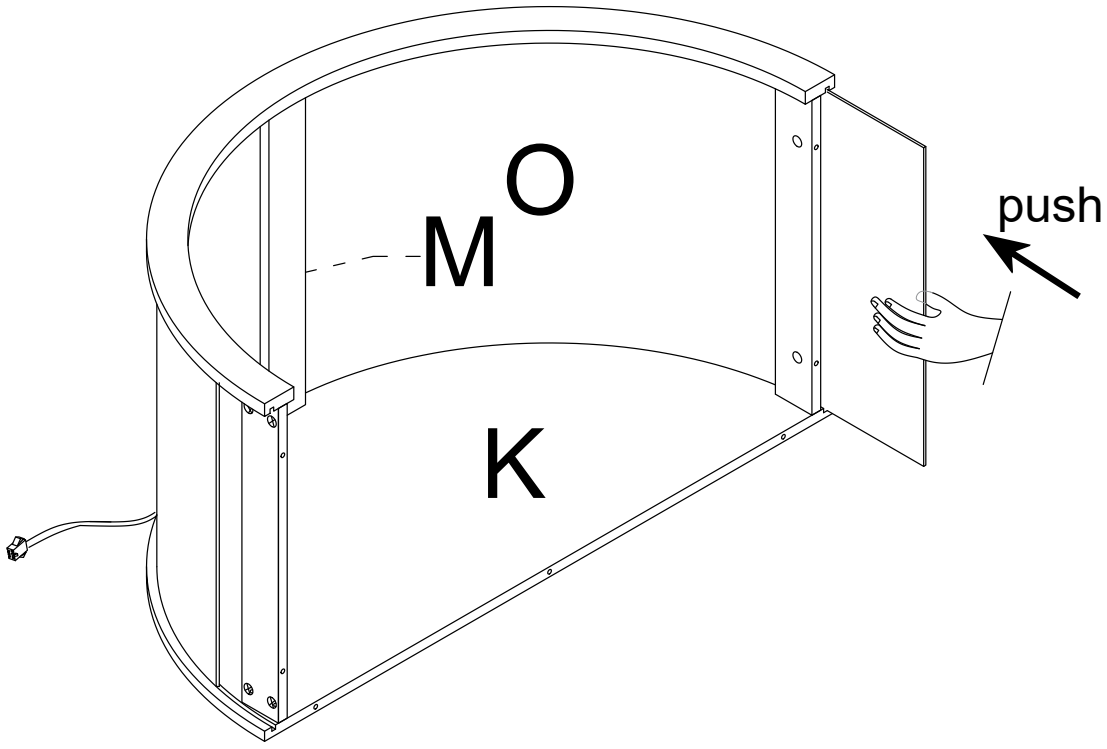


Step 25

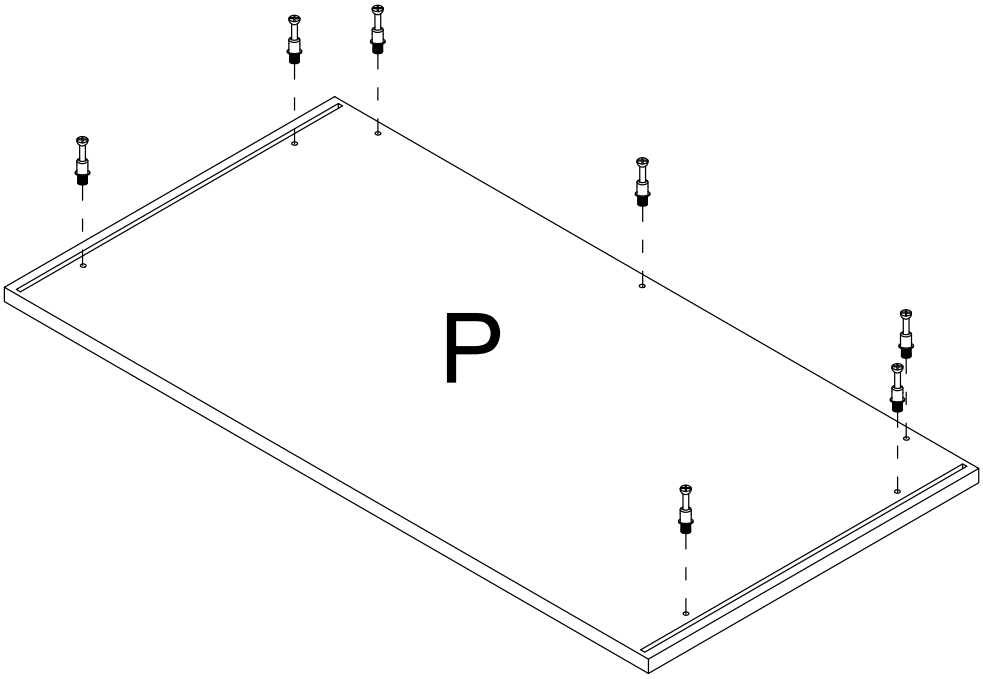


1 x7

Step 26

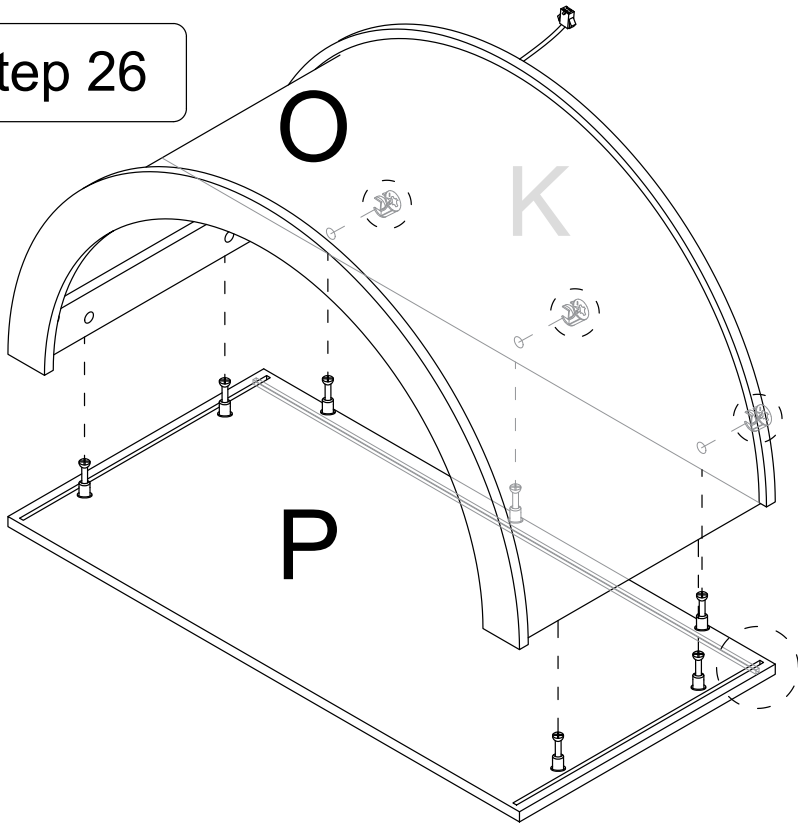

2 x3


When installing the P plate, pay attention to the front and back, and there is a groove under the K plate.



Step 27


2  x4


Note: After installing the P board, you need to pat the backboards on both sides into the grooves of the P board by hand.

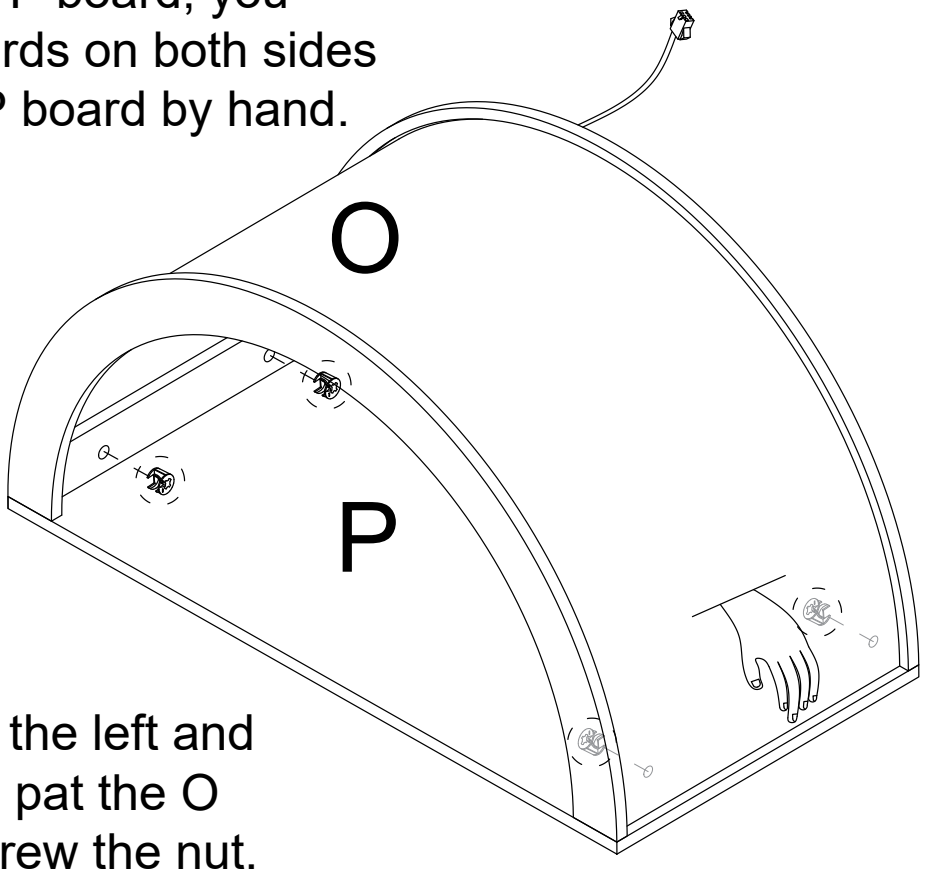

Note: pat the O plate on the left and then screw the nut, then pat the O plate on the right and screw the nut.


Step 28


6  x4

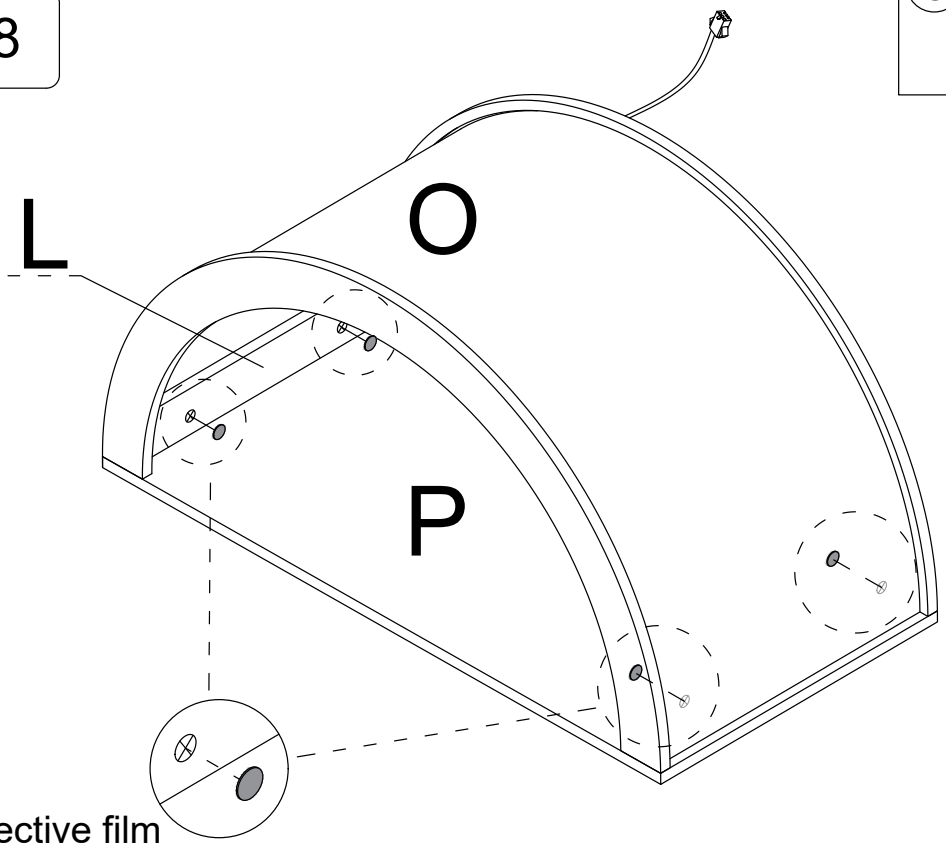


Tear off the protective film before installation


Step 29

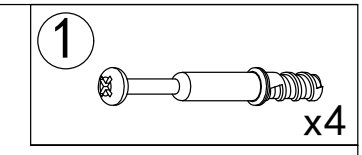

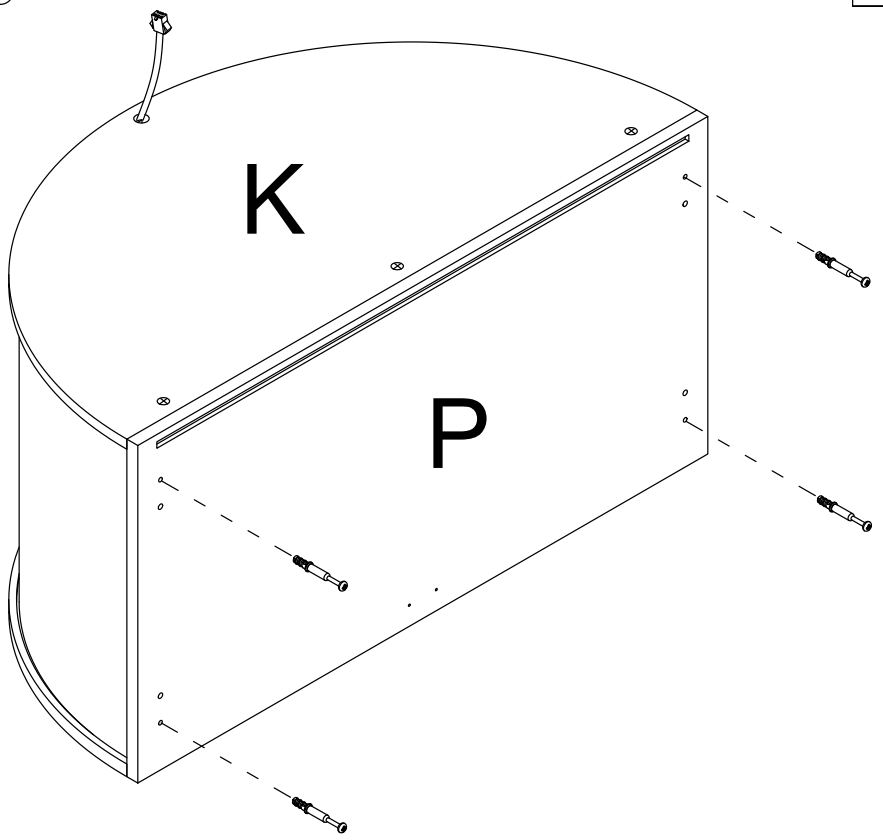


Step 30

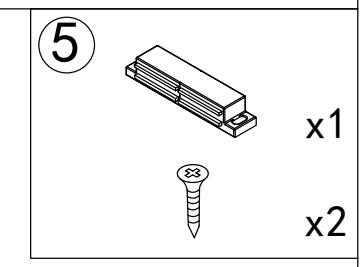

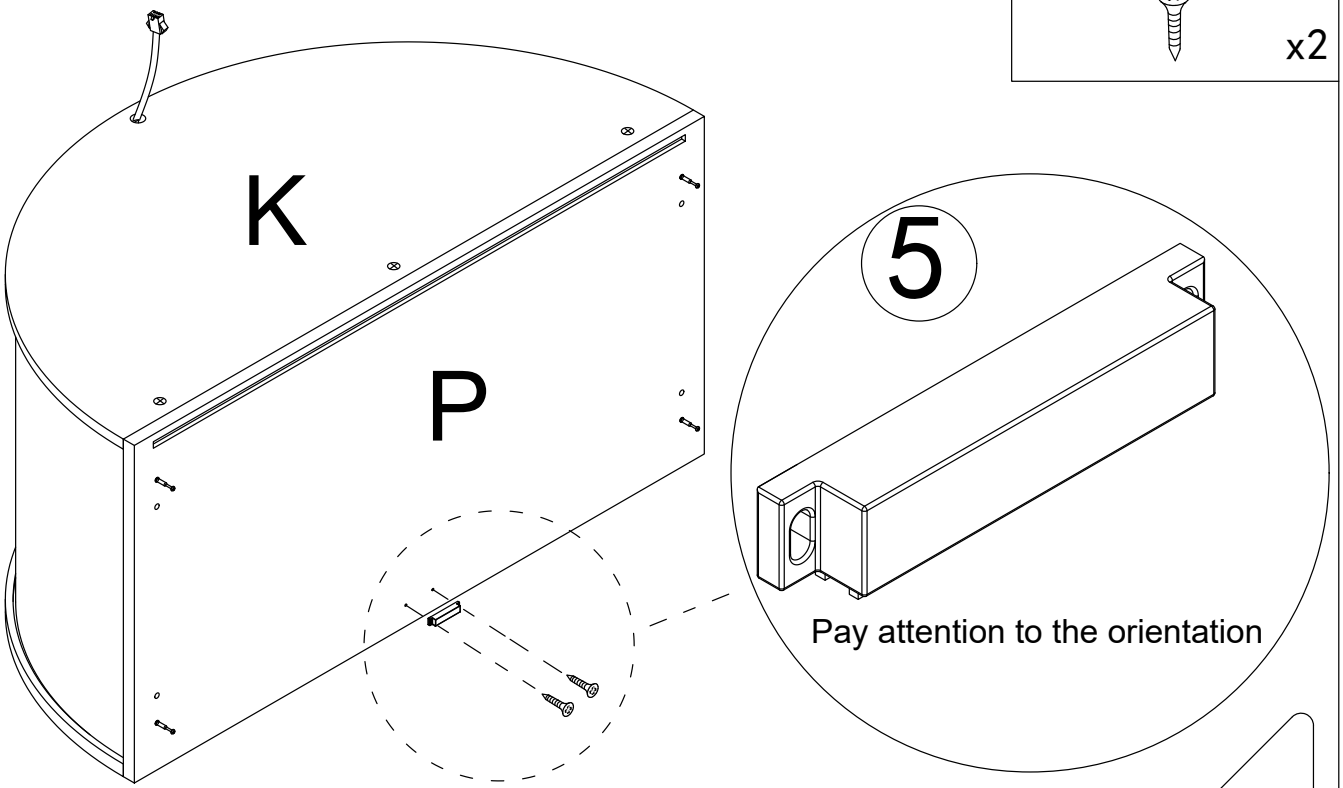


Step 31

2 x4

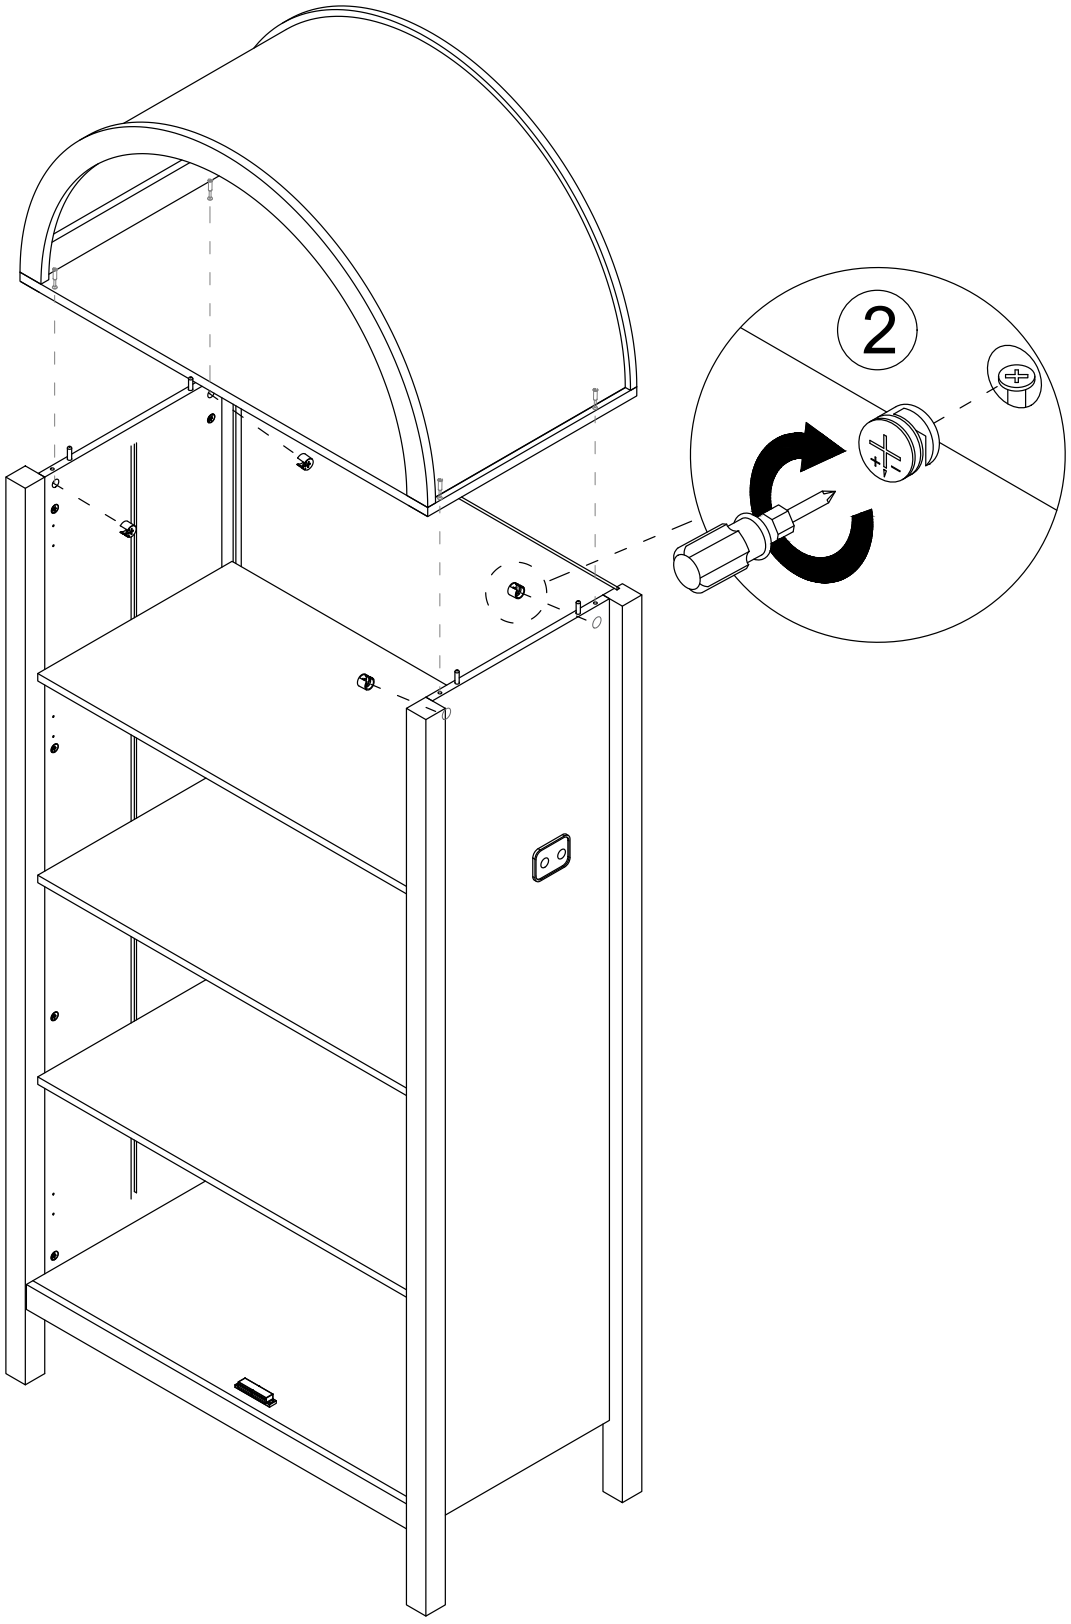


Step 32

8	x3	x6
13	x2	x2

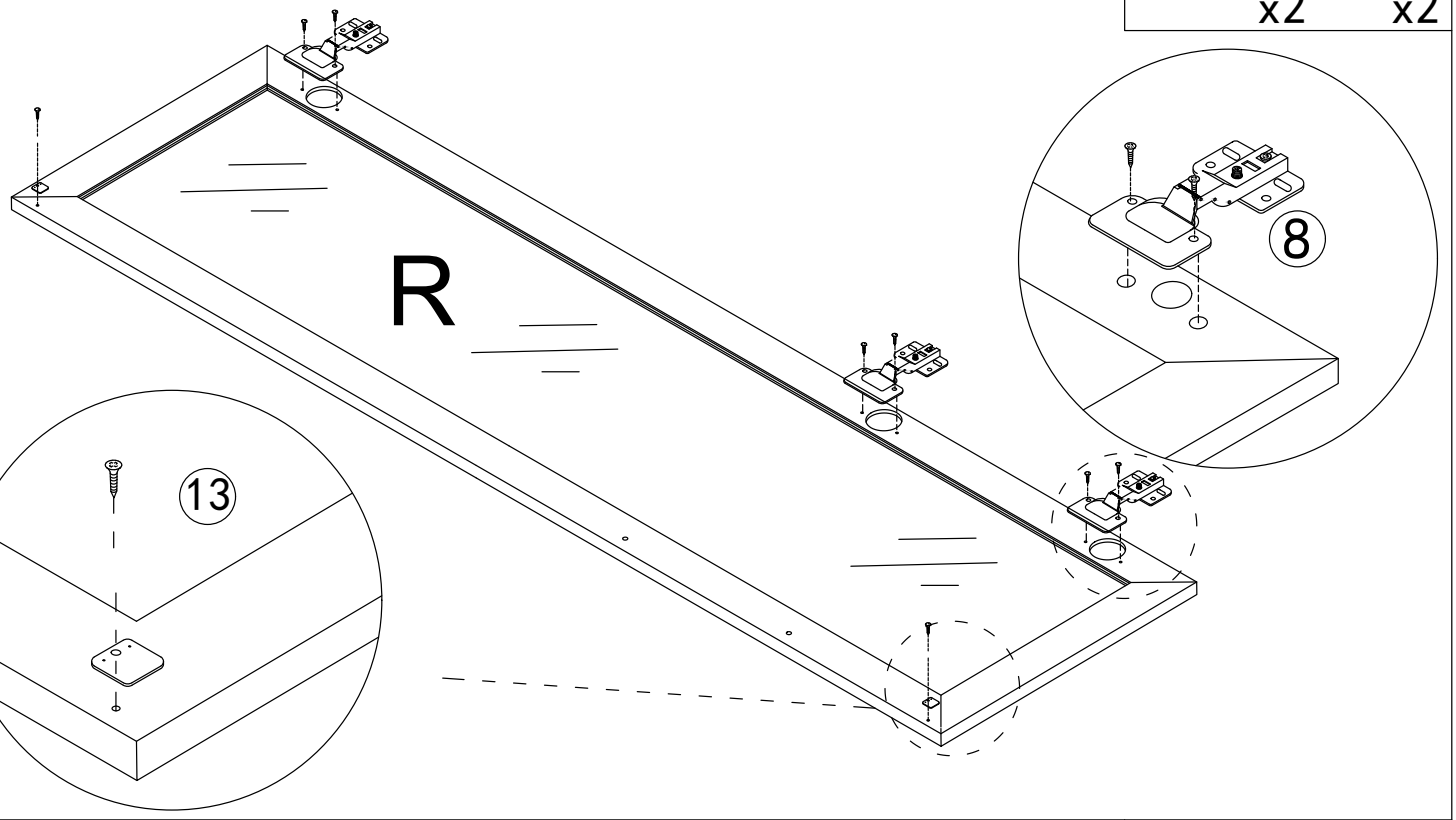

Step 33

8	x3	x6
13	x2	x2

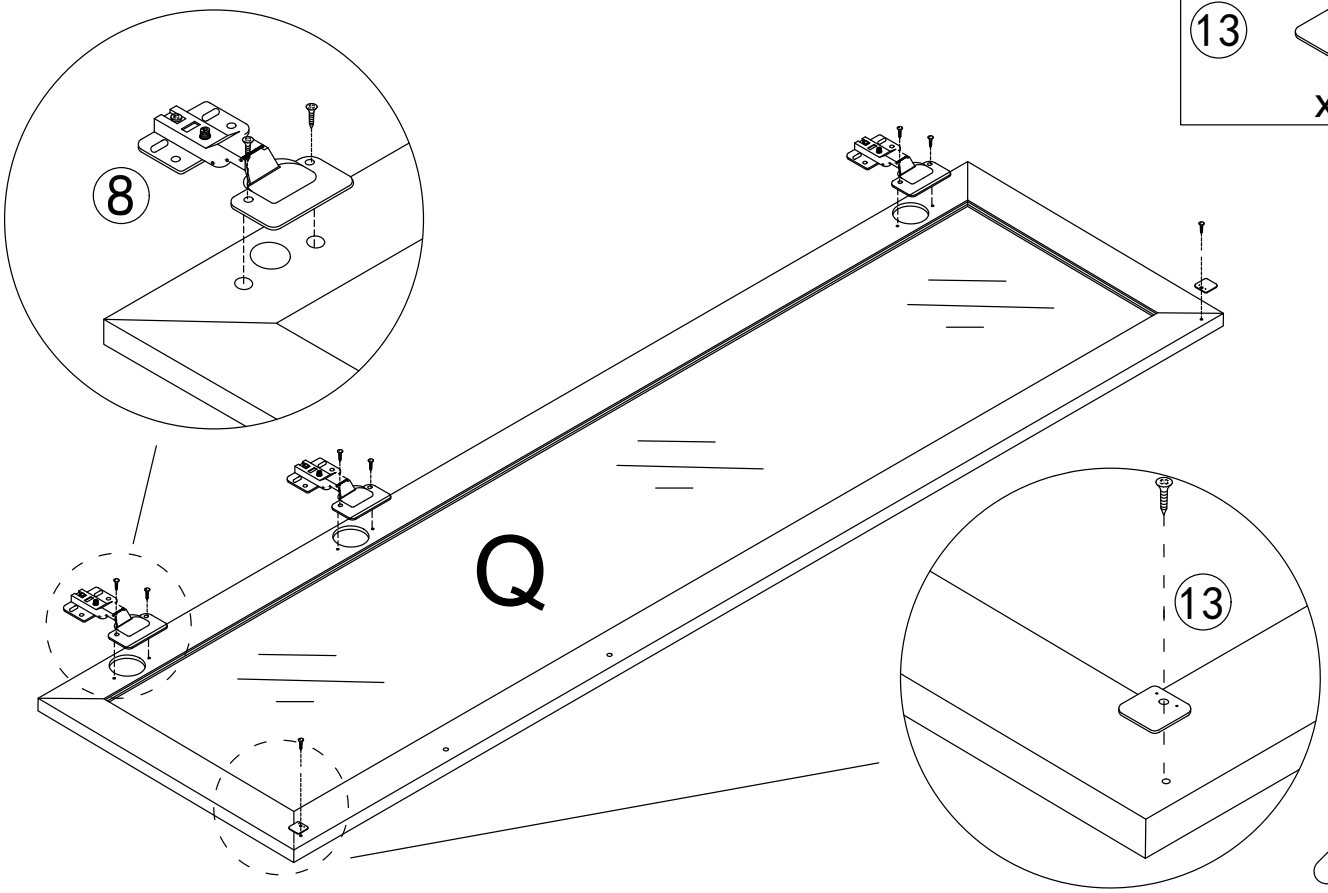

Step 34


Install the adjustment hole of the door hinge first

8 x12

9 x1 x2

First


Second

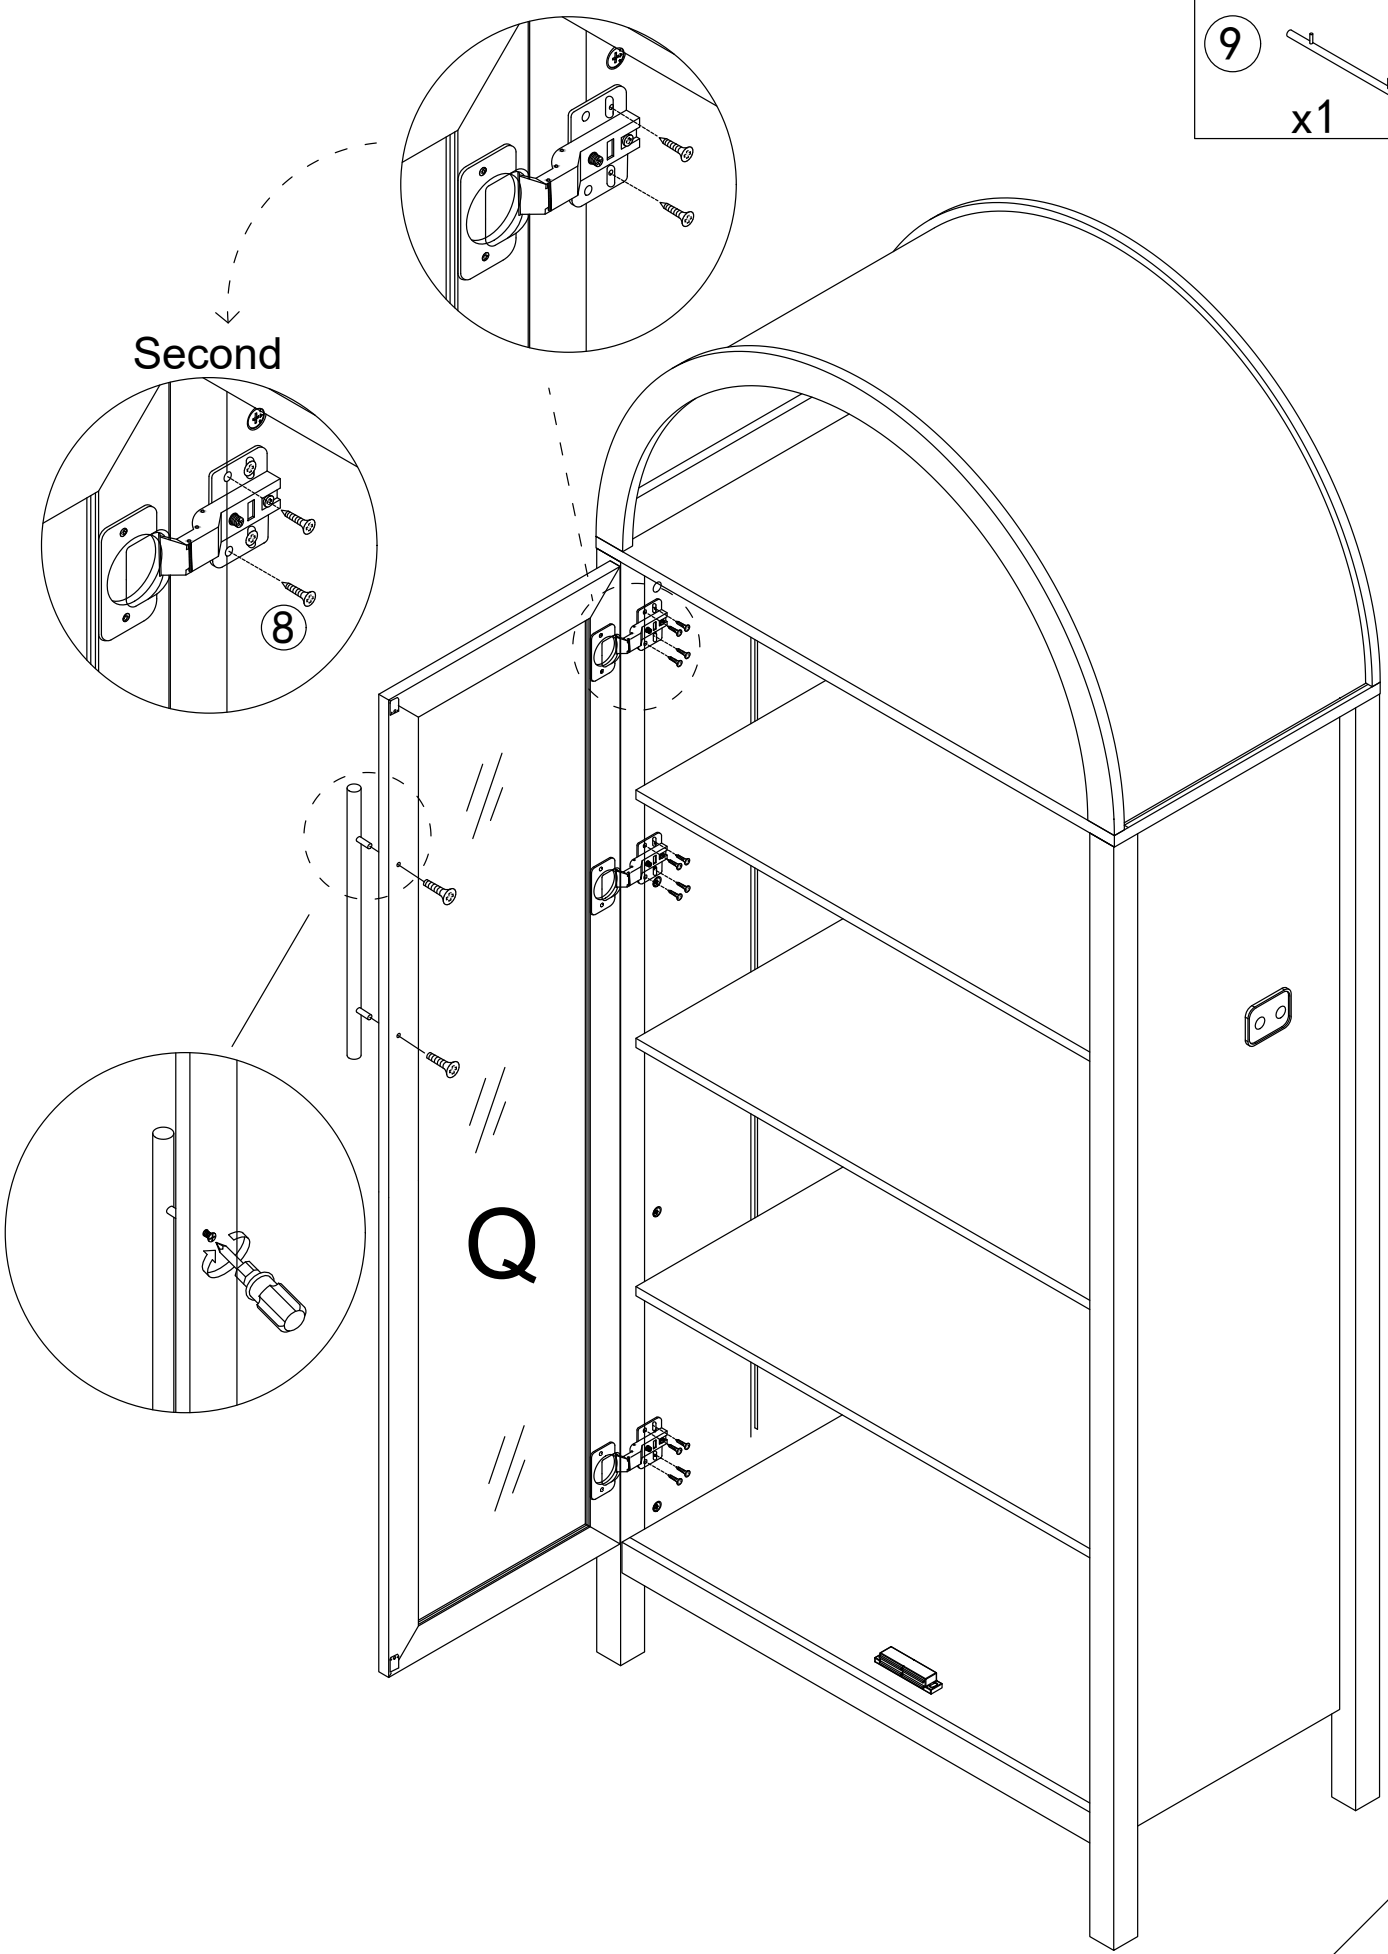


Step 35

8 x12

9 x1 x2

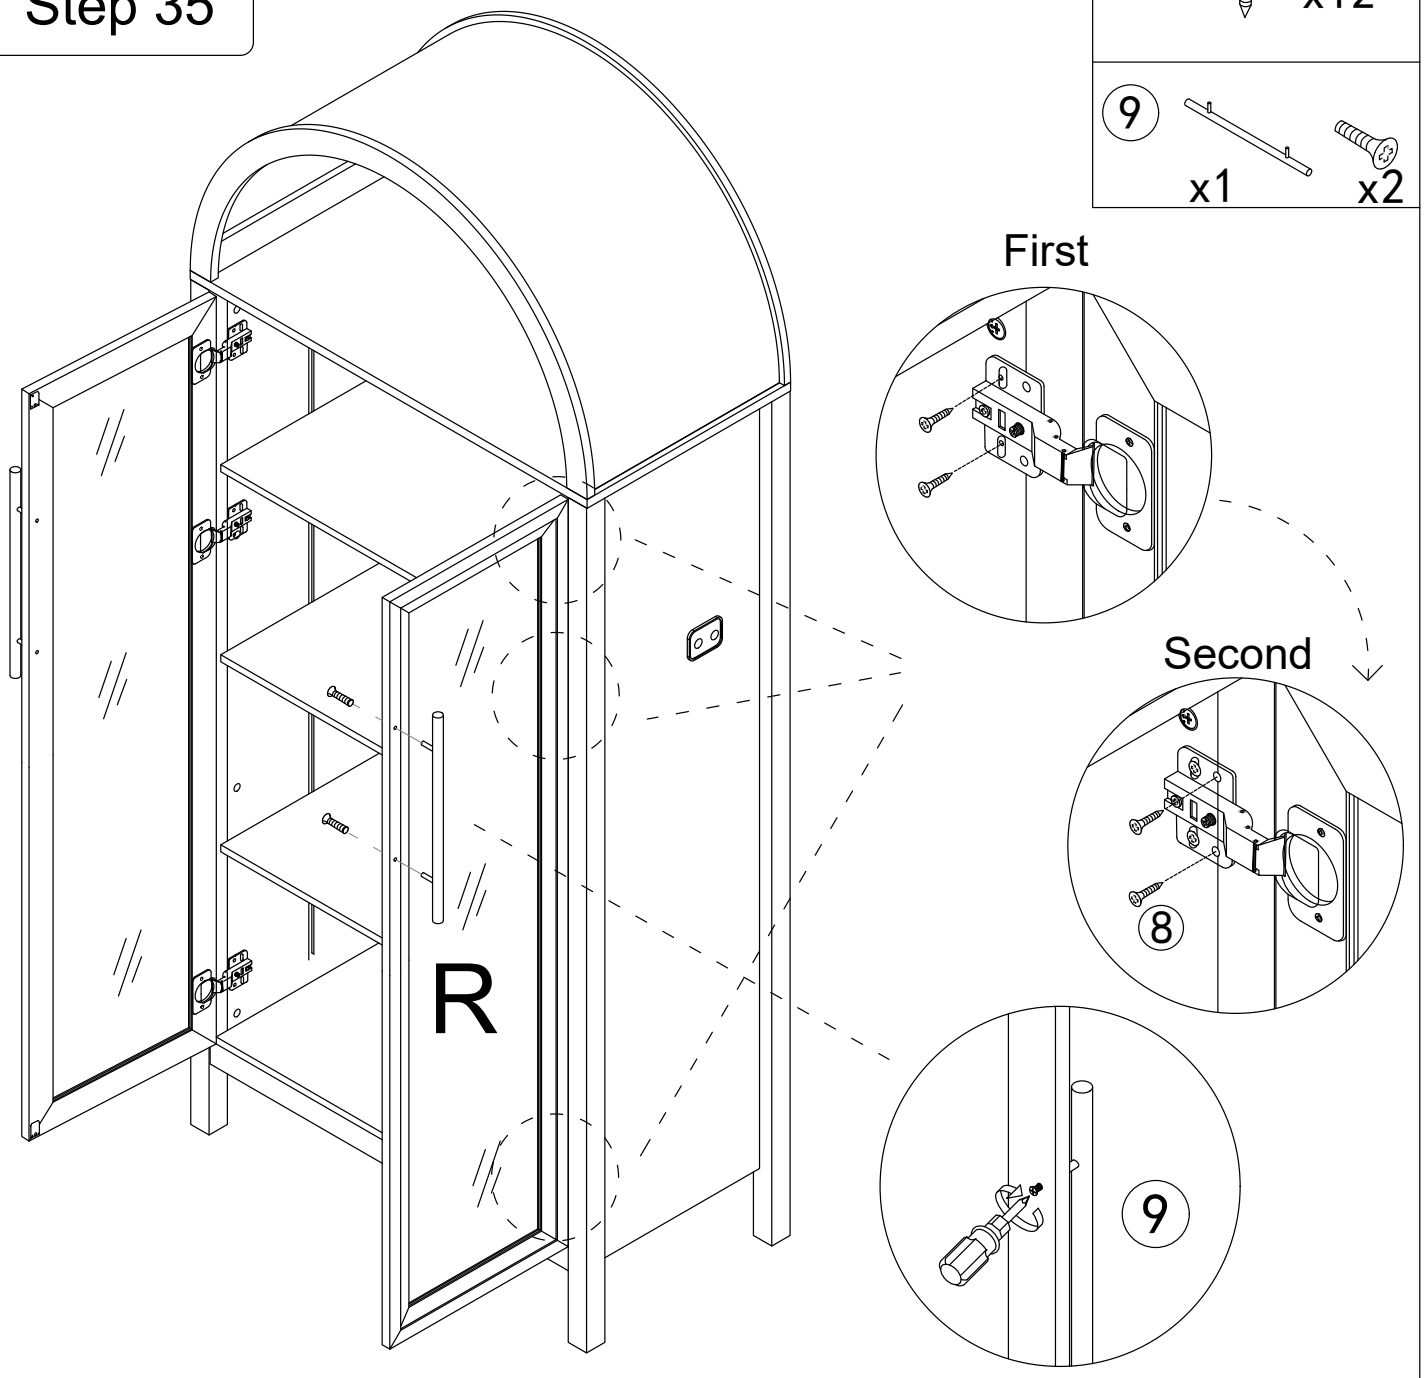



Turning this screw can effectively adjust the size of the door gap.

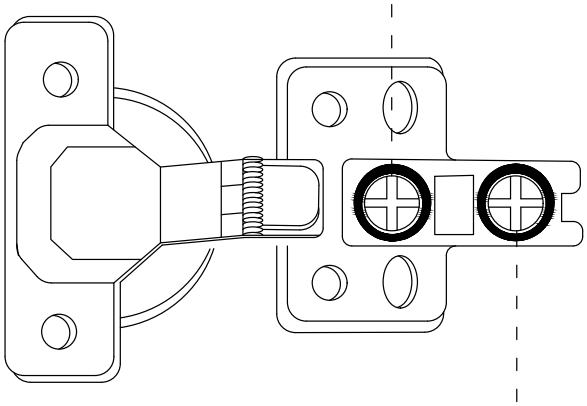


Turn this screw to adjust the door panel to be flat with the side panel.


Step 36




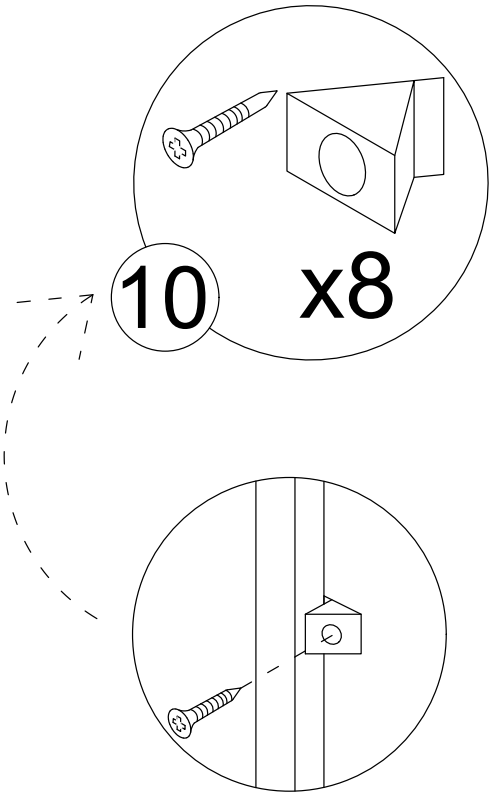


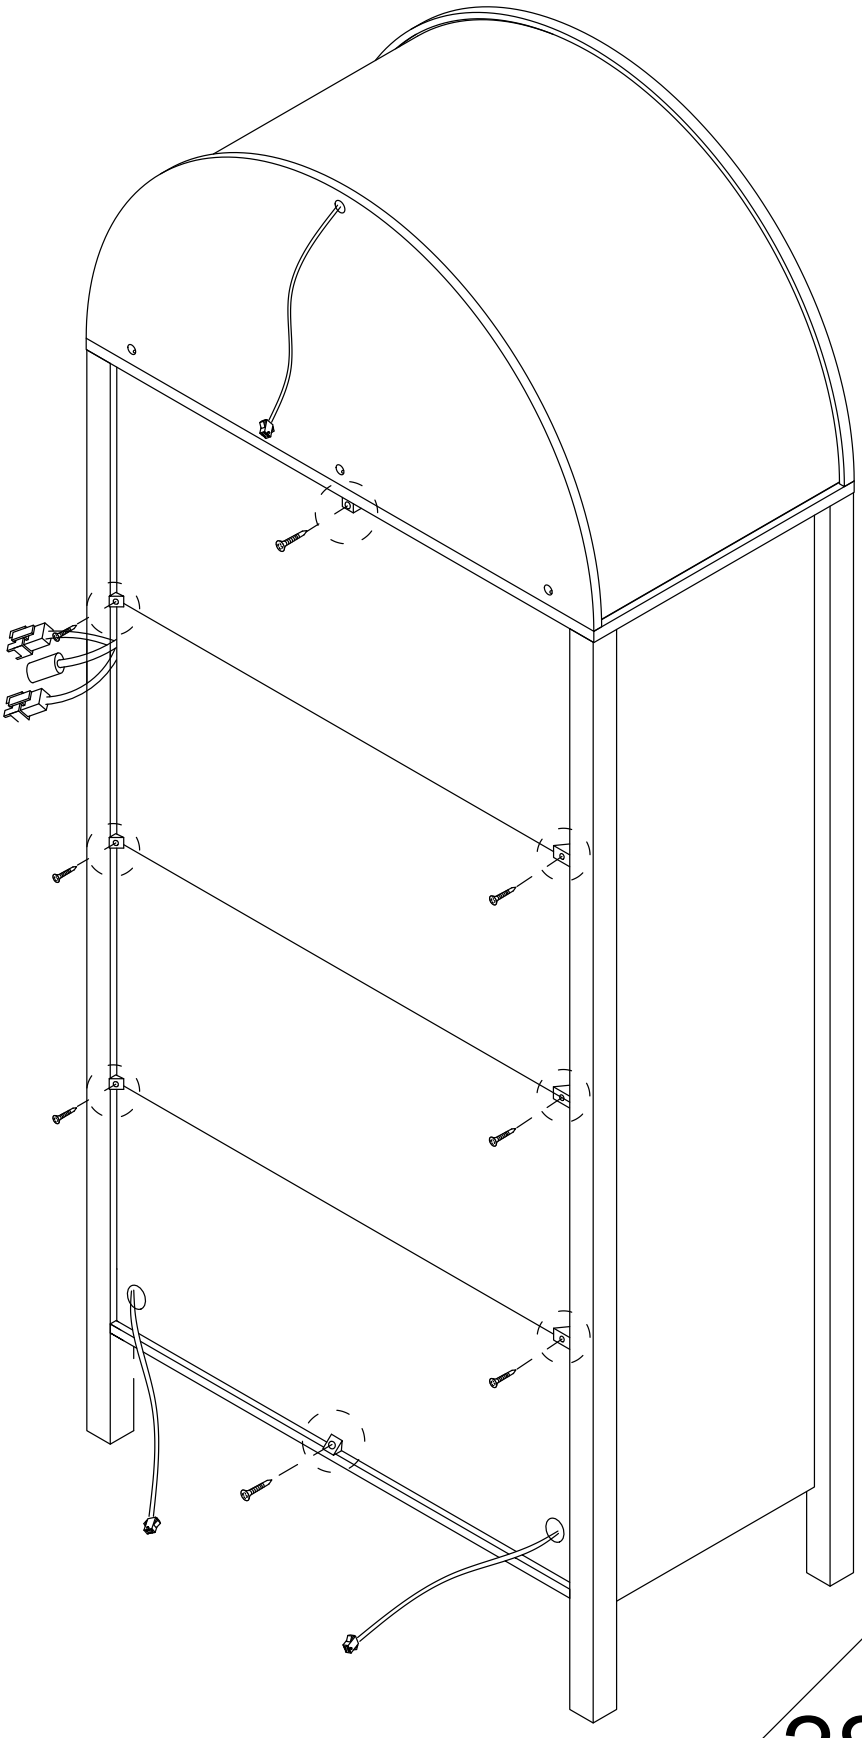


Step 37




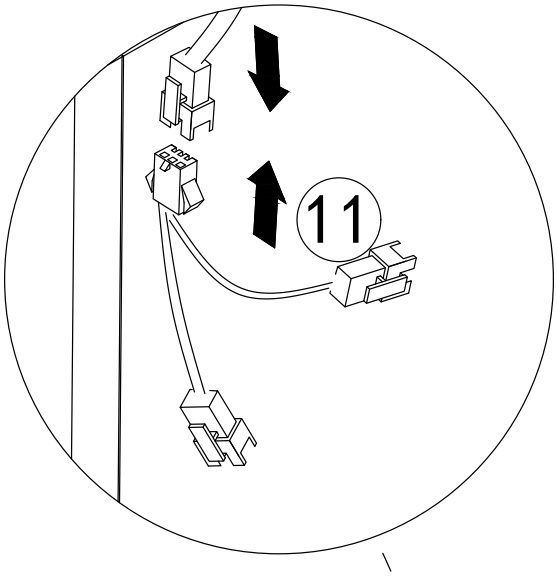

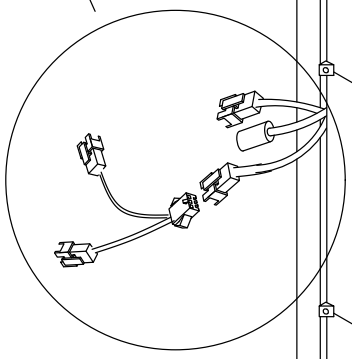

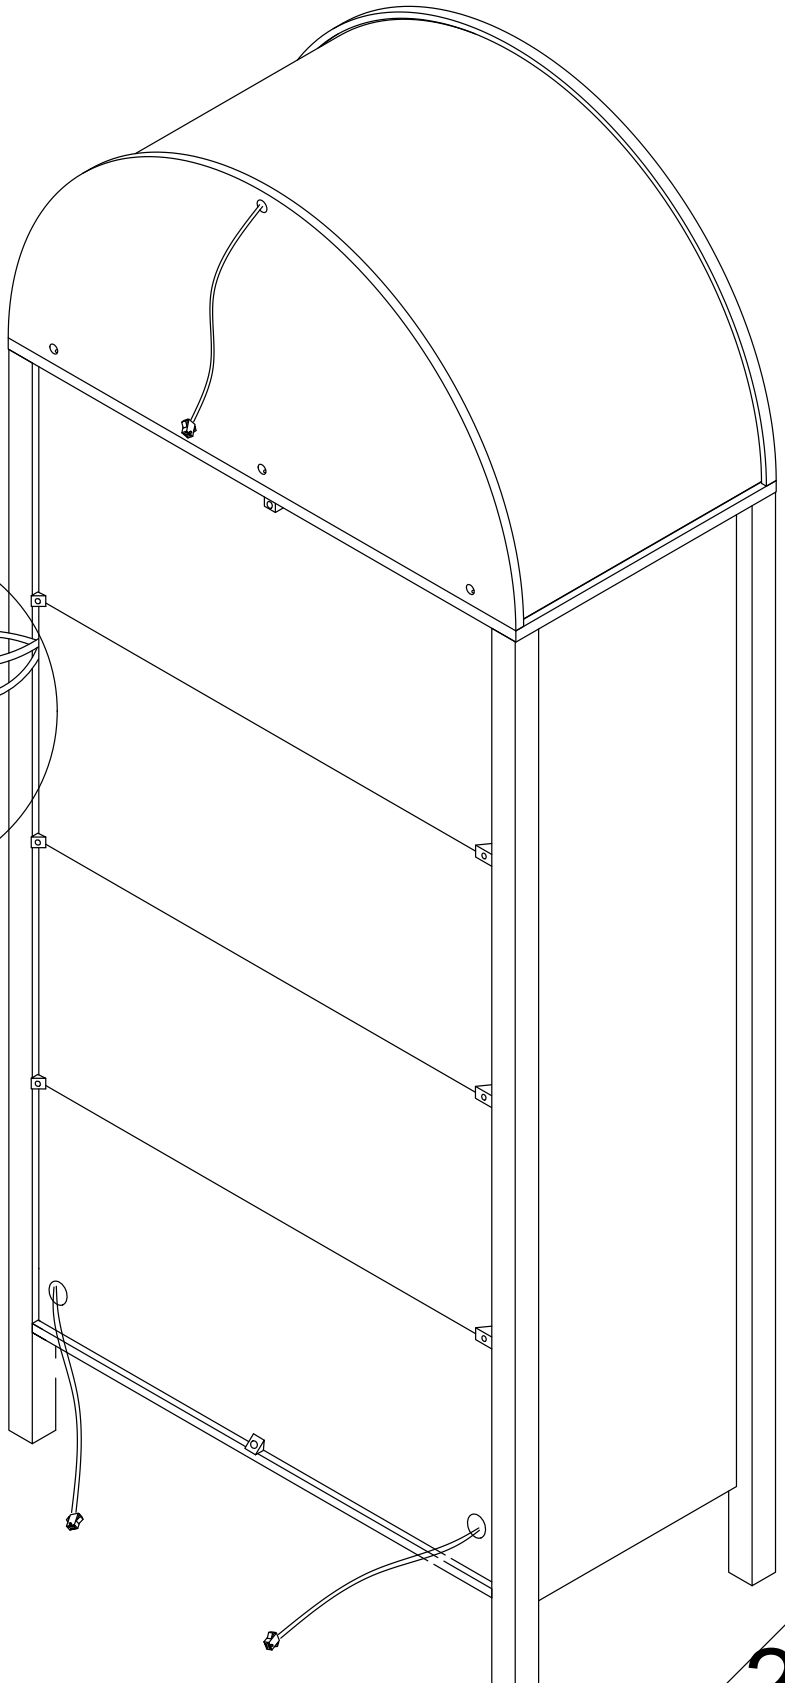


Step 38

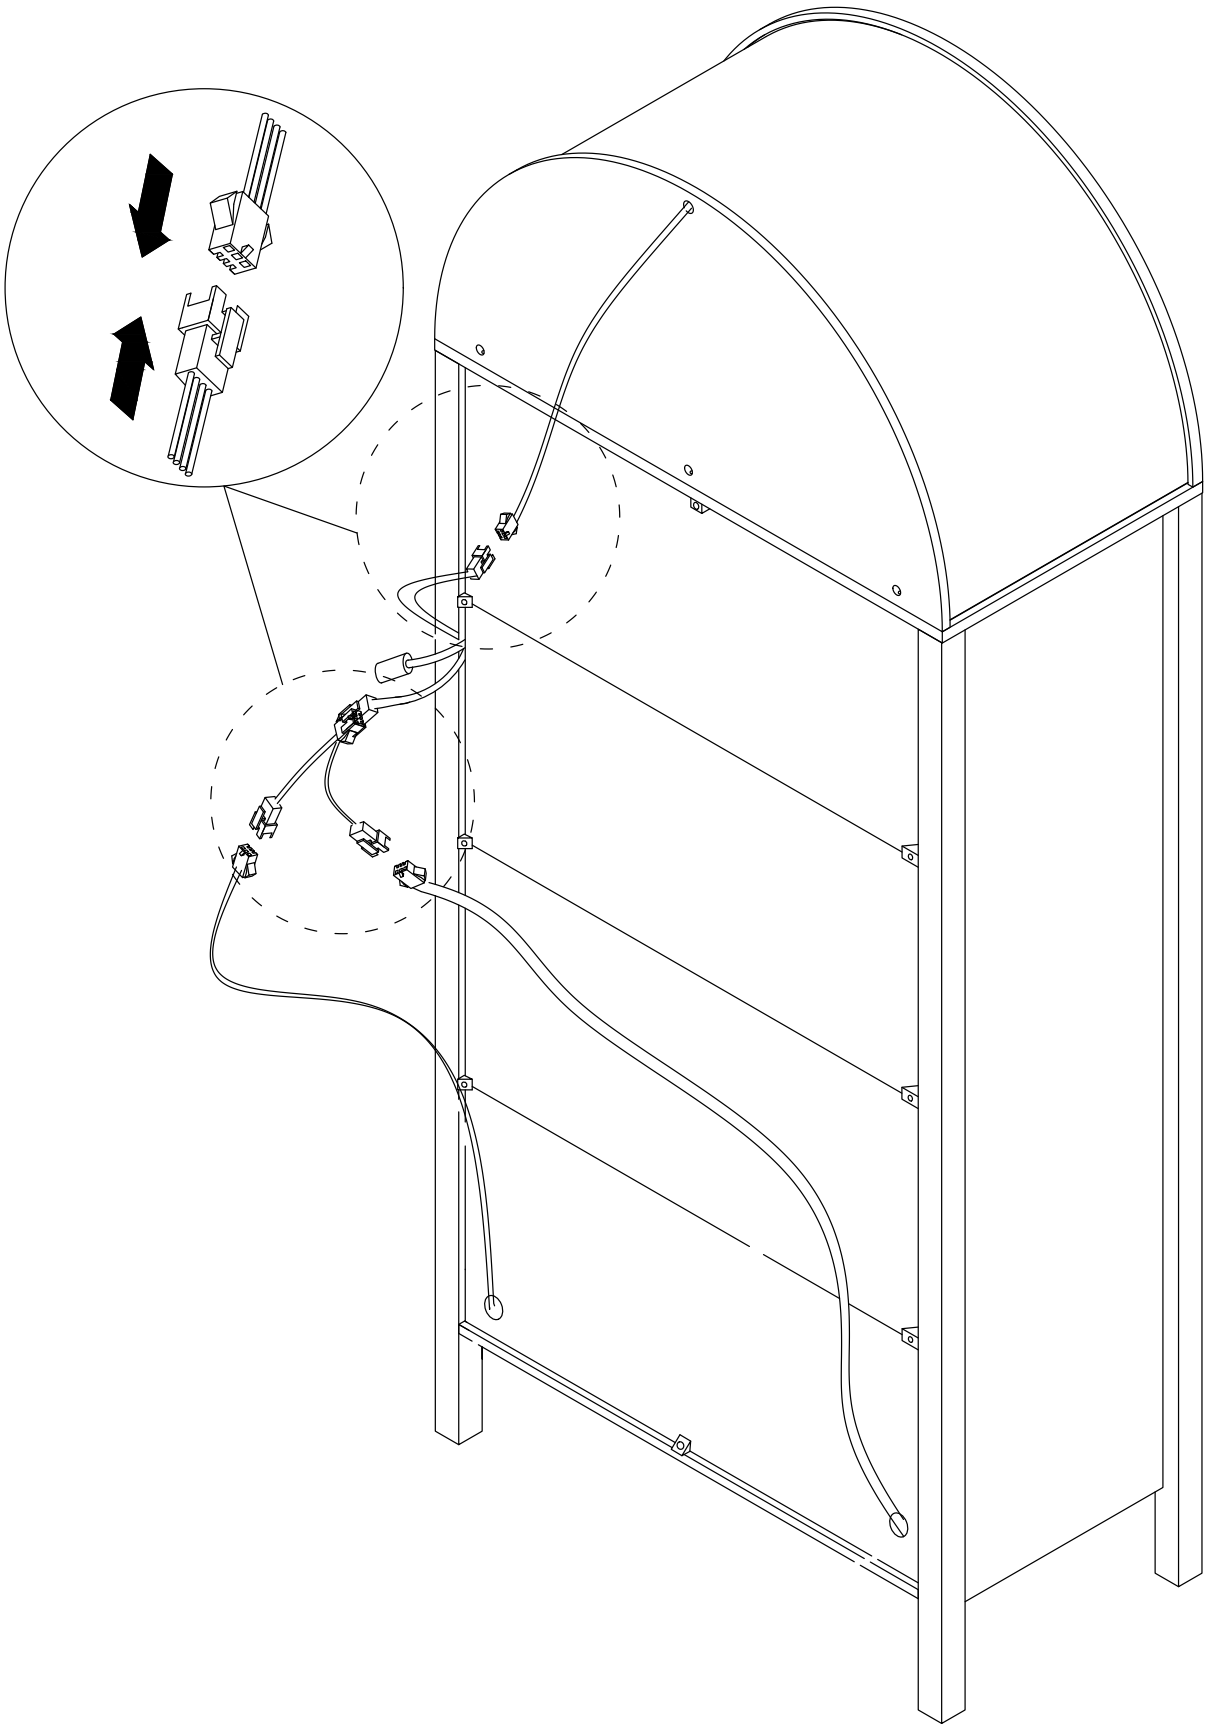

Step 39


12 1pcs

1pcs 1pcs

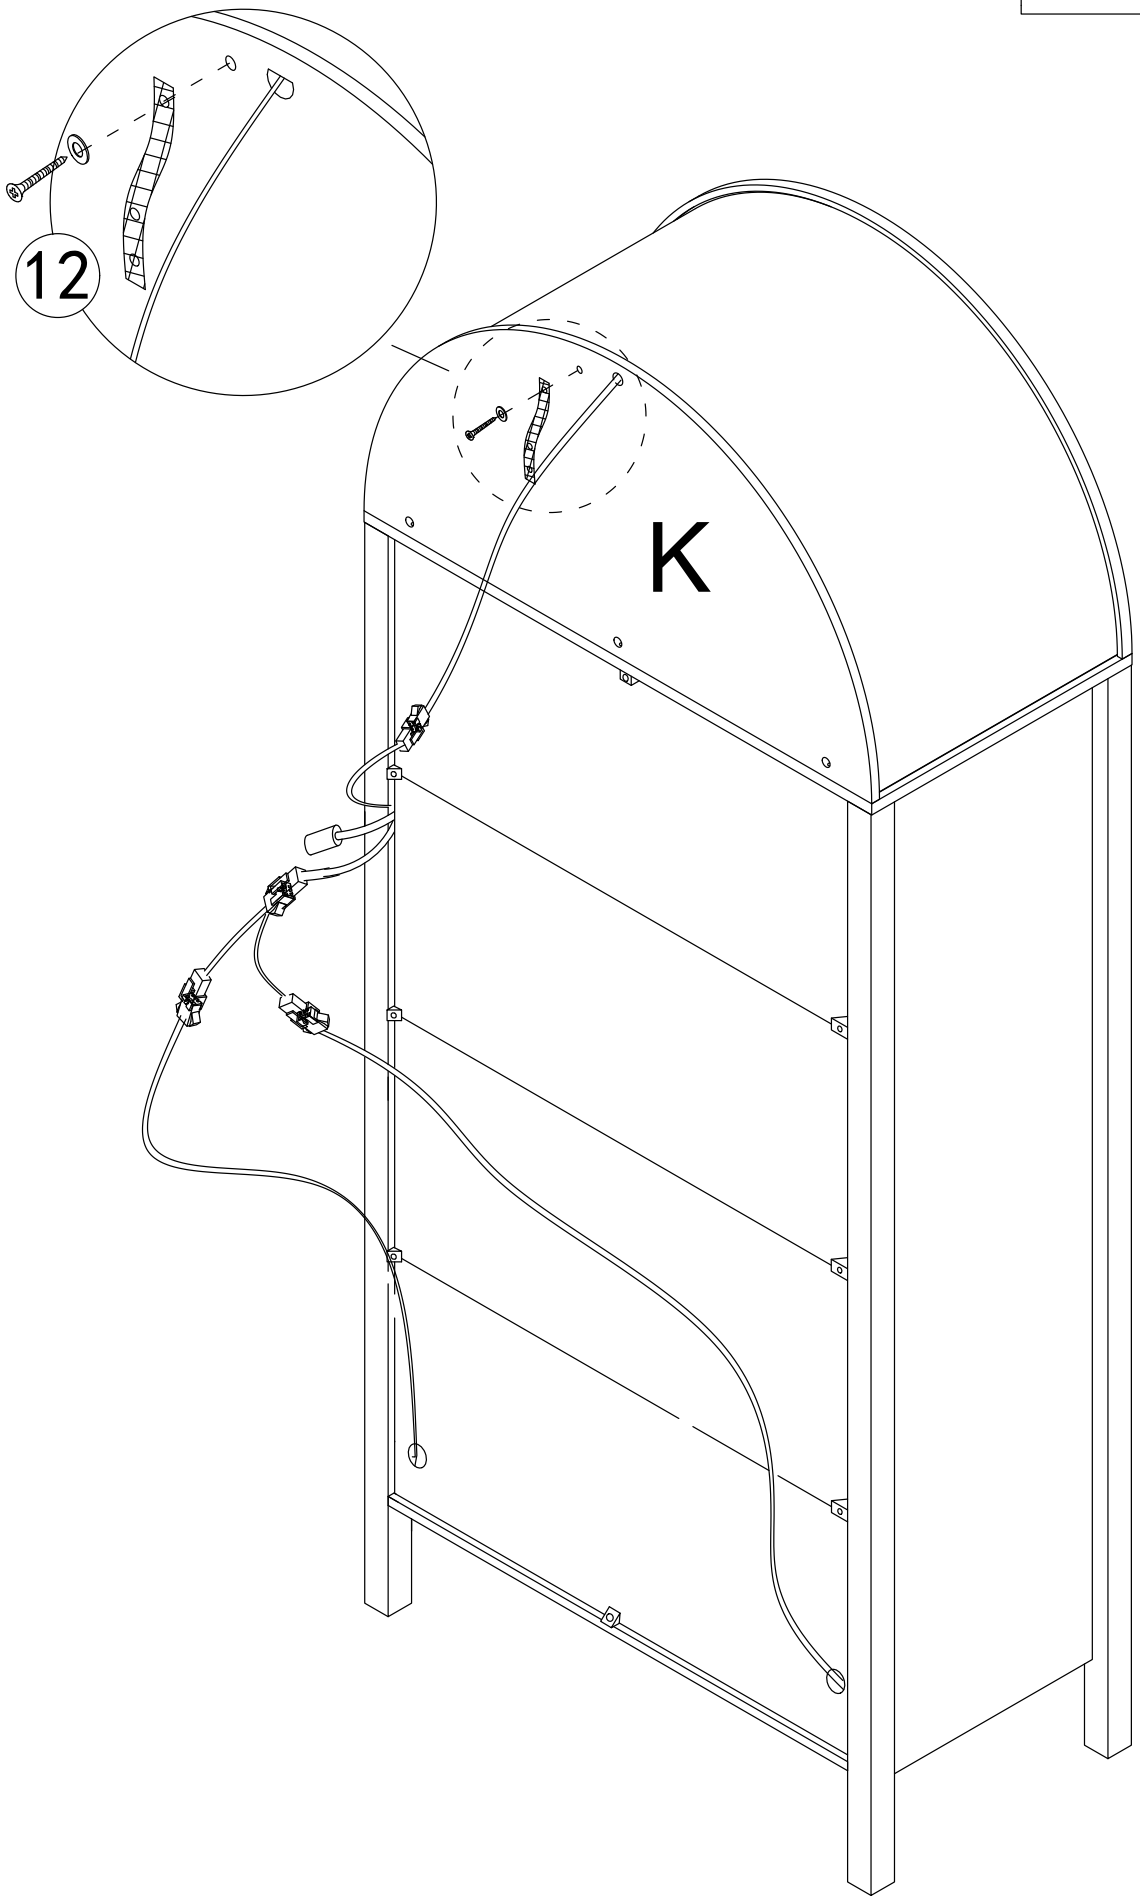

Step 40


14 x3

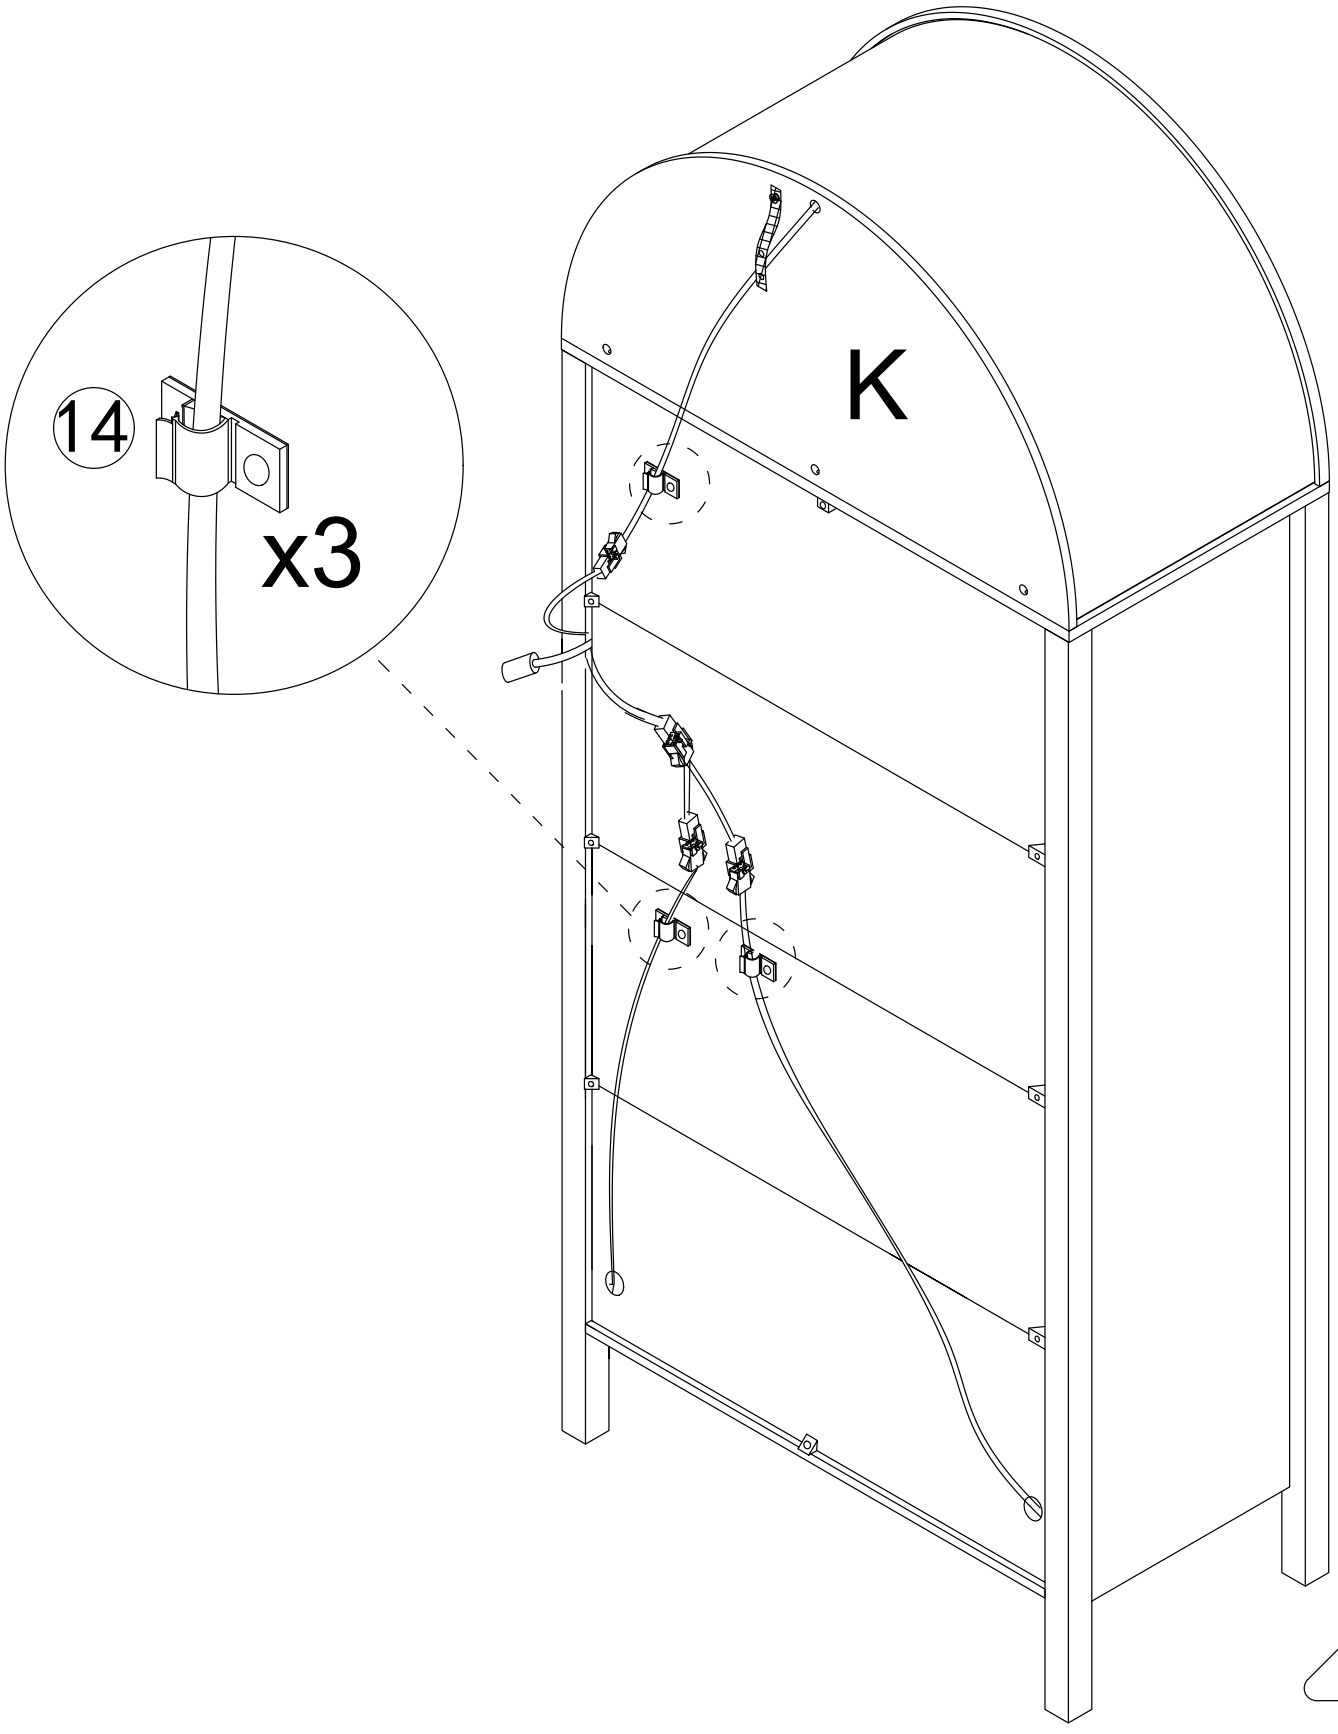


Step 41

15 x6


Use a hammer to drive the nail into the gap of the wooden board and fix the back board

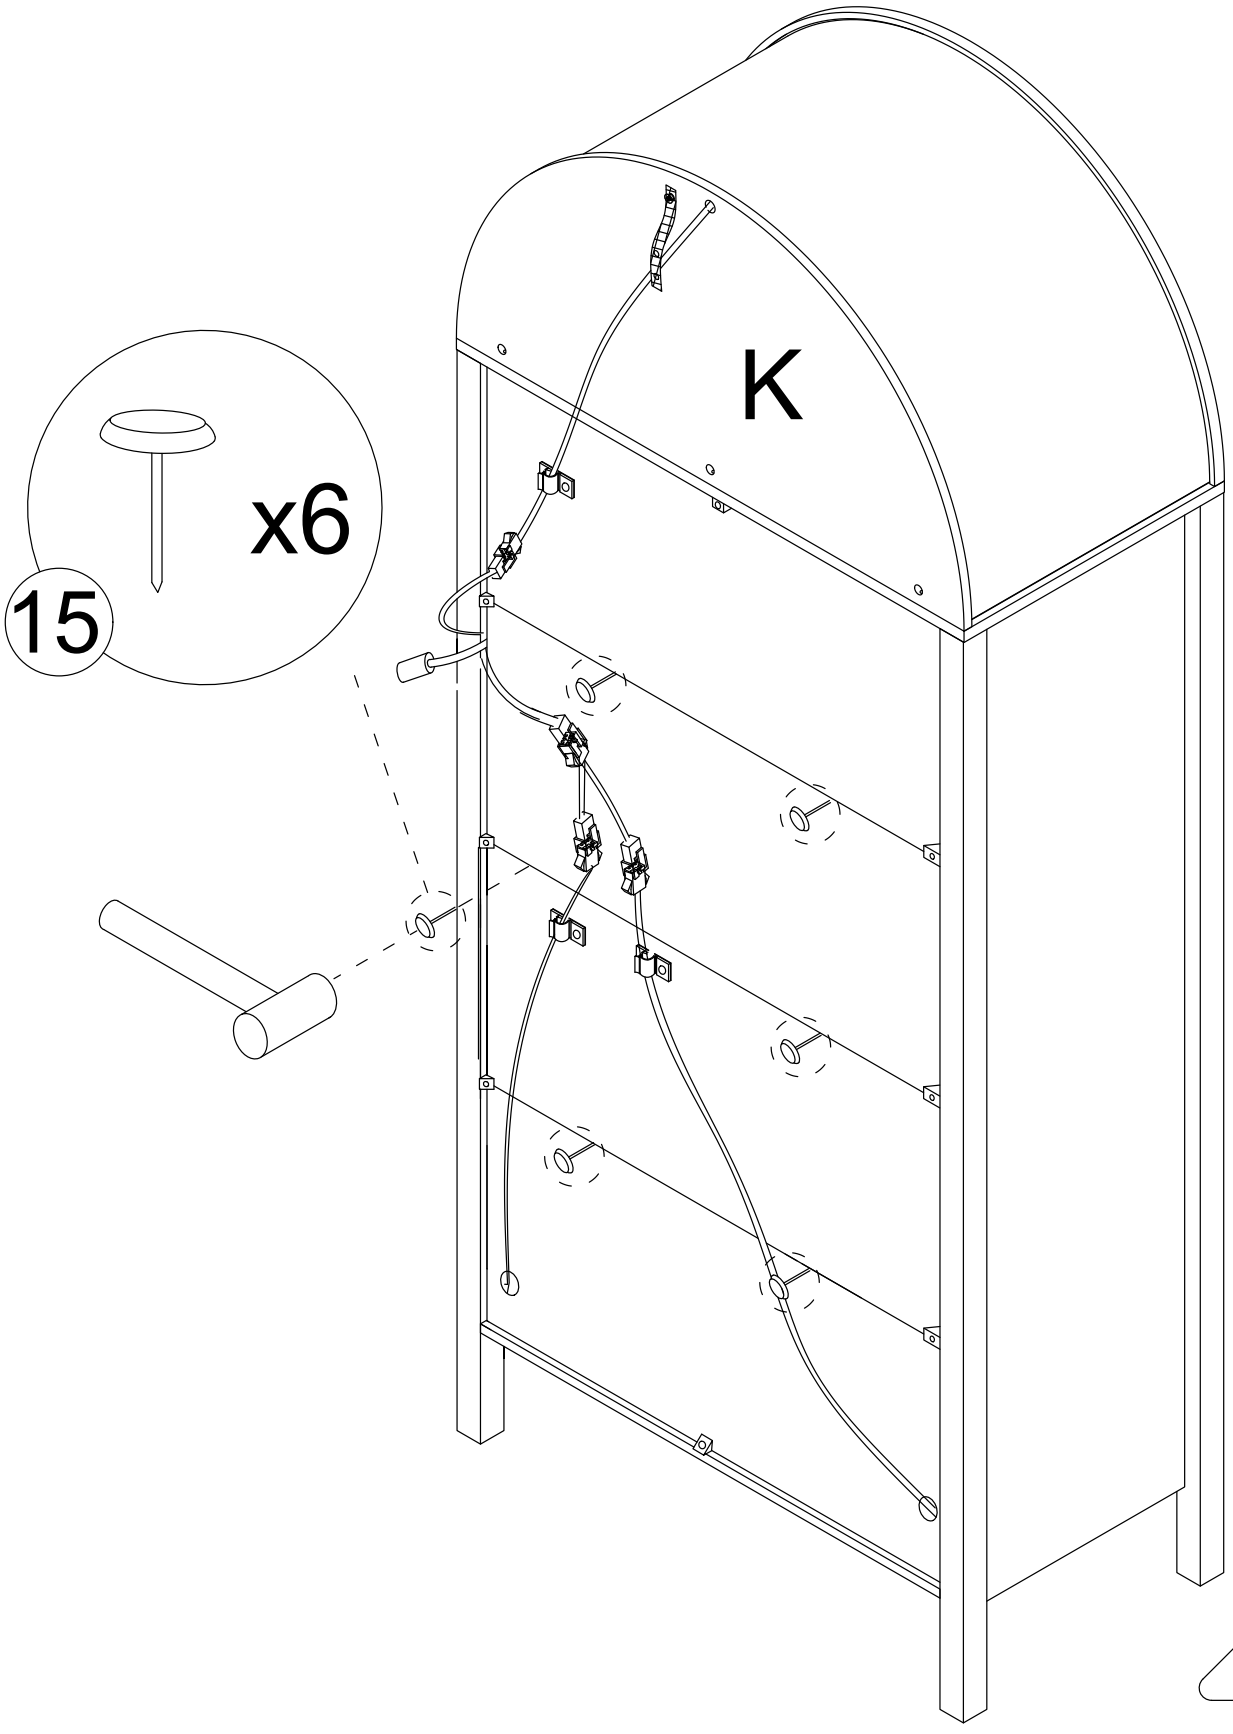

Step 42

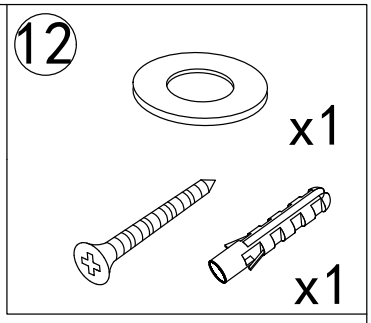


use a ruler to measure theapproximate height of the producton the wall, and then mark it witha pencil.

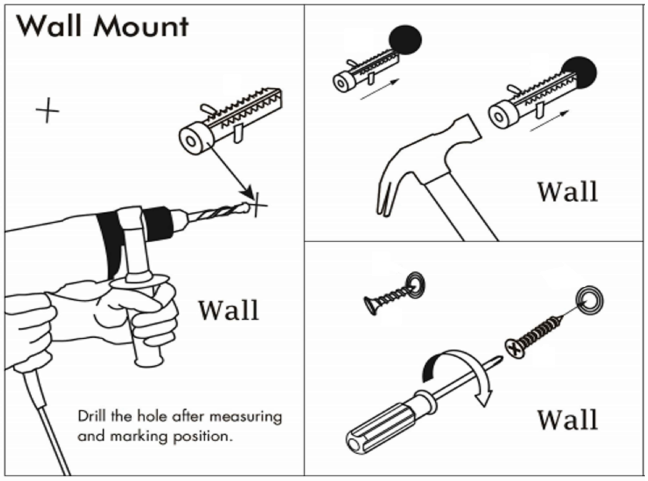


Put the expansion bolt into the hole.

Pass the matching screws throughthe "anti-rewind" and tighten themto fix them on the wall.


Use a tape drill to make holesin the wall that are suitable for theproduct screws.

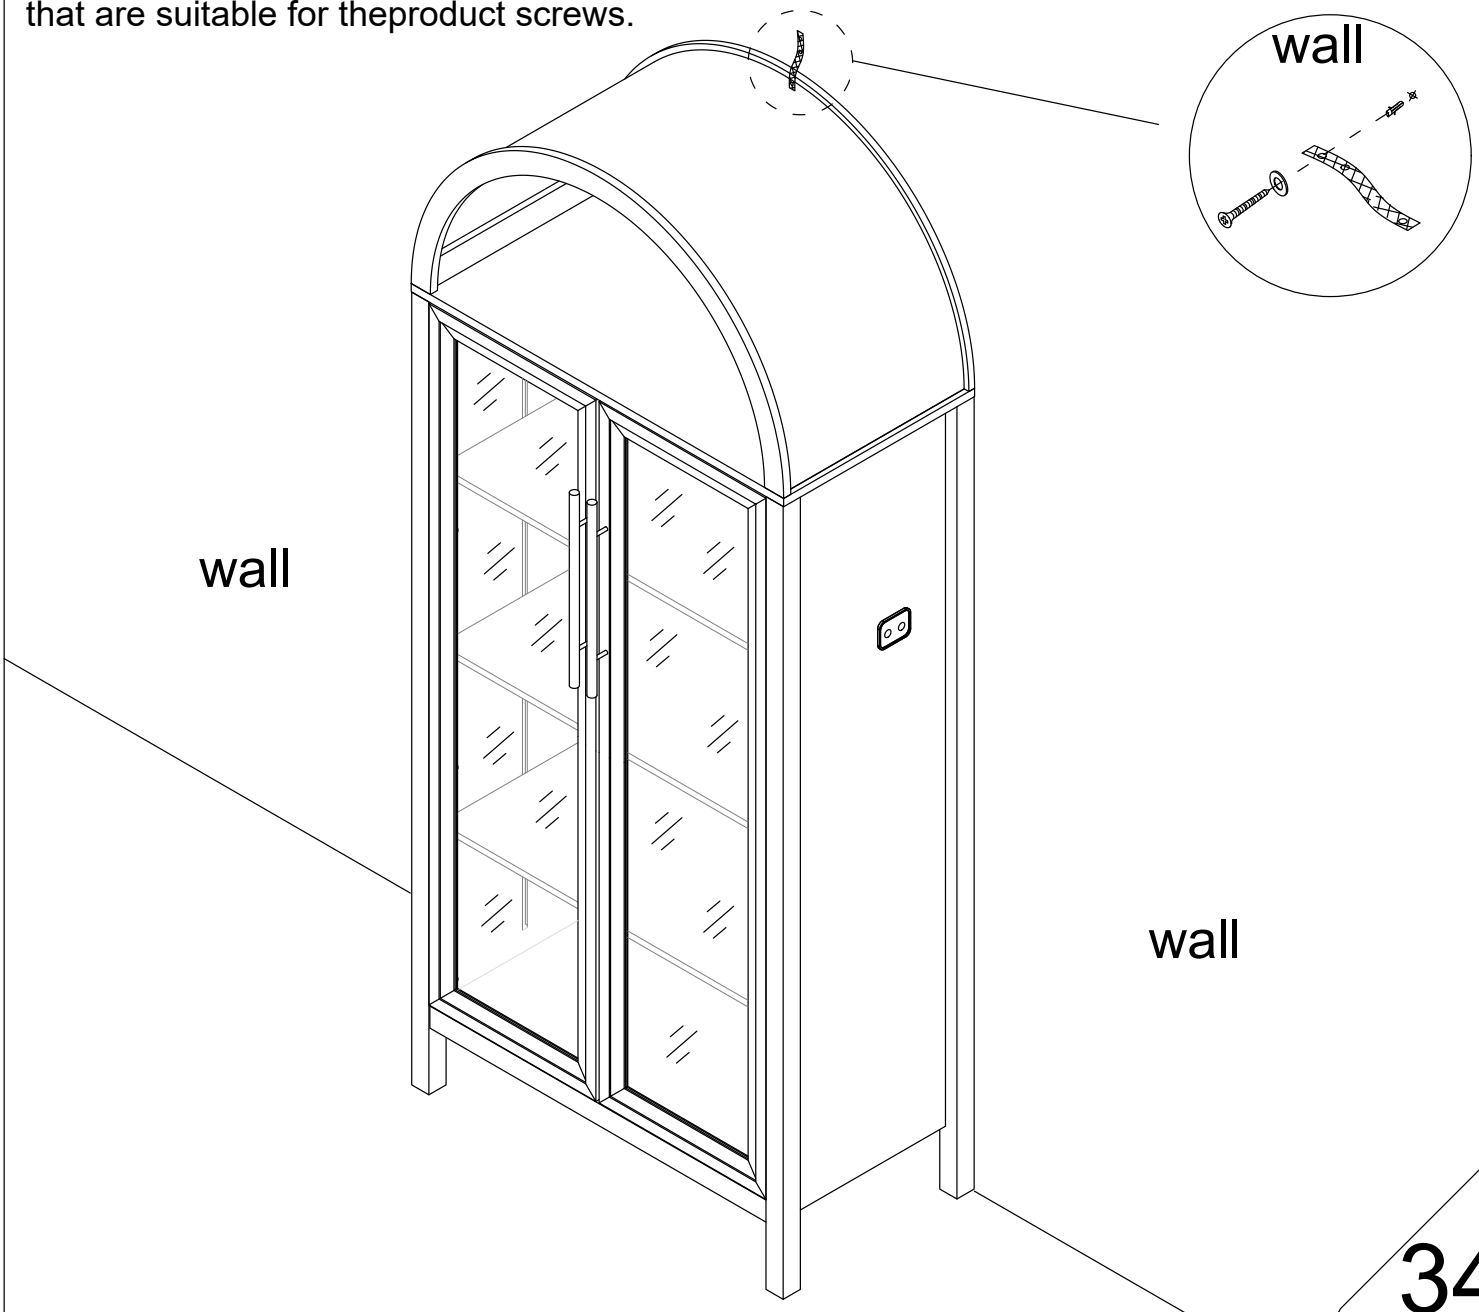

Step 41



x1

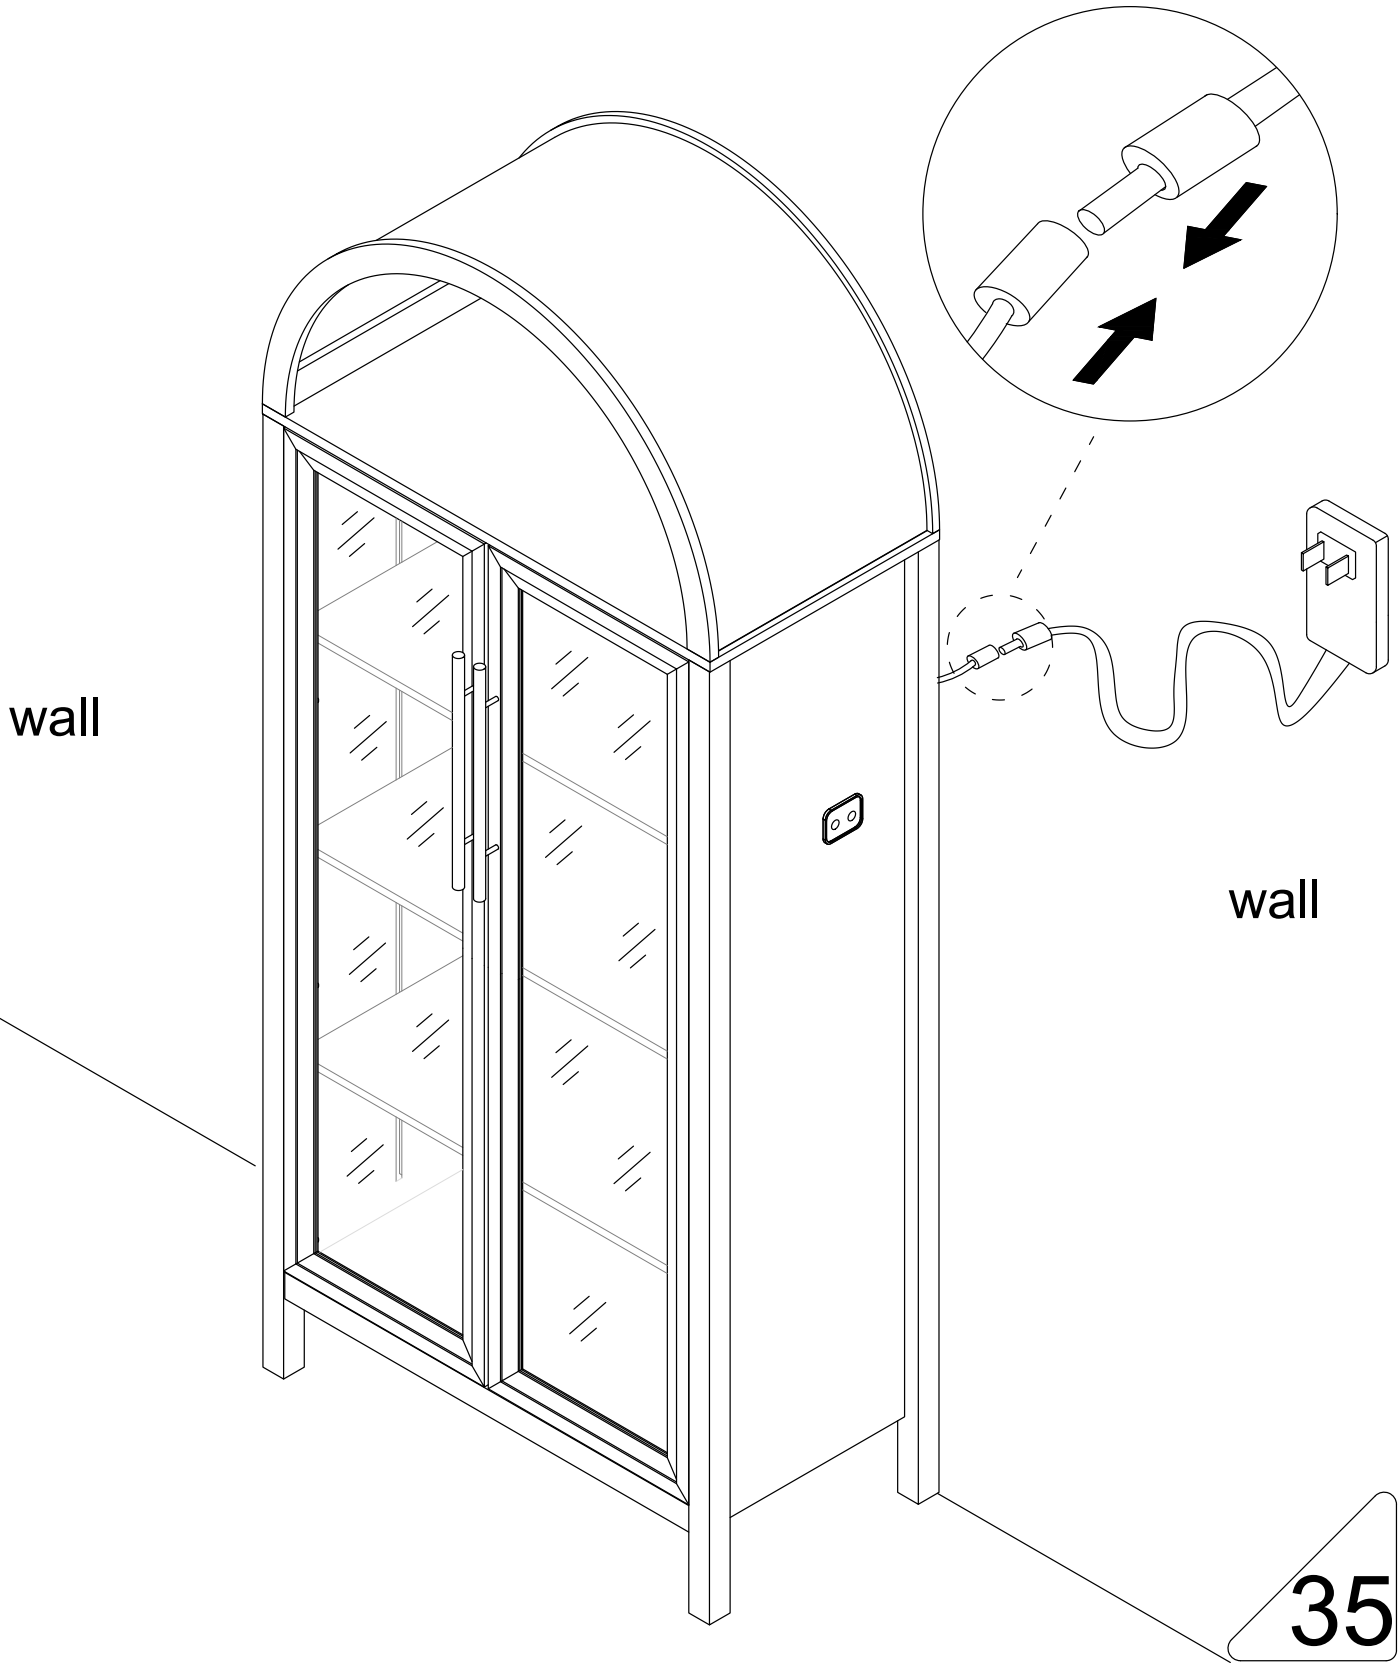


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

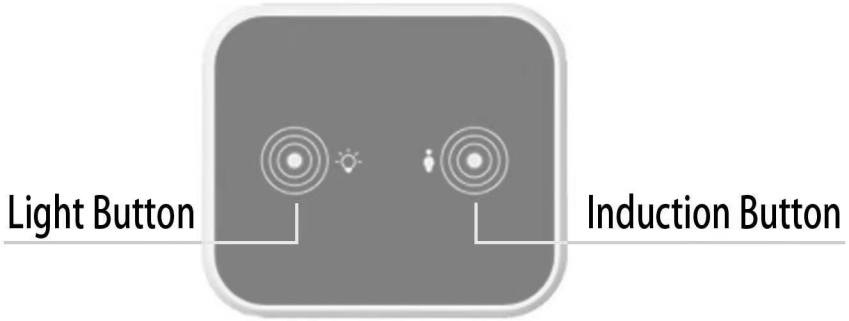

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. **B**. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.