


LSP705

USER MANUAL LED SURFACE DOWNLIGHT



1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. SWITCH ON THE MAIN AND LIGHT ON

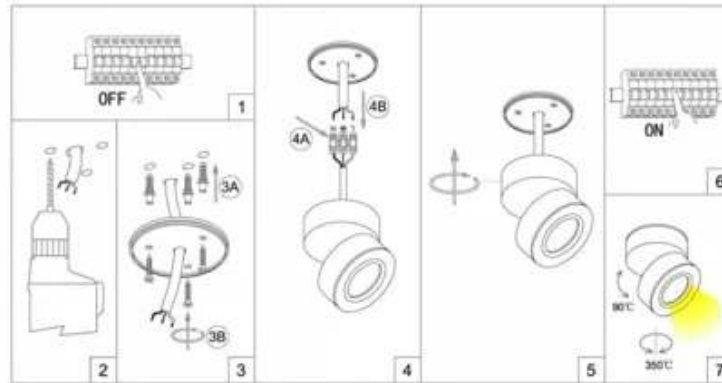

LSP705
Ø75xH55(mm)
LED-5W

Lamp: CREE COB LED
Color: 2700K/3000K/4000K/6000K
Color rendering: Ra90
Input: 100V-240V AC
Current: Constant 500mA
Frequency: 50/60Hz
Watt: 5W
Life span: 20,000hrs
Operating temp: -20℃~+40℃
Indoor use only
IP20
Dimmable: NO

Cautions: a. Installed by qualified electrician
b. Use only power-supply supplied
by manufacturer for products guarantee