


USER MANUAL

LED Mirror with Front and Backlit

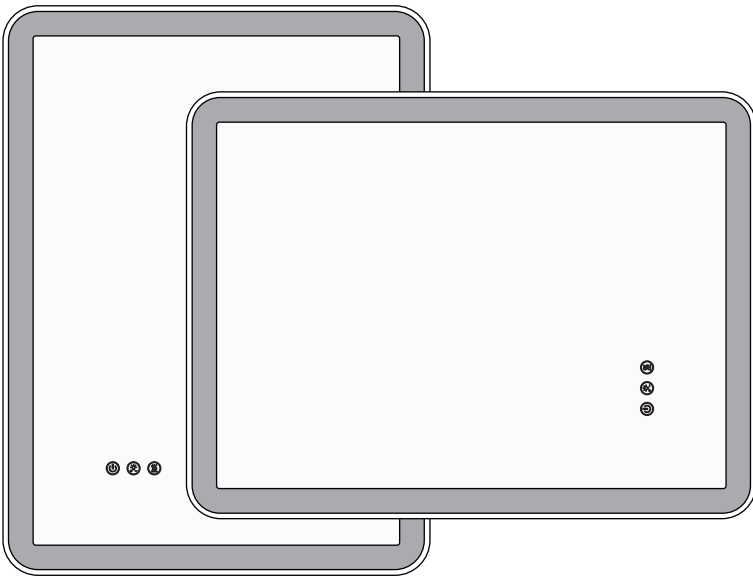

CONTACT US:

After opening the package, please inspect the product immediately and see if there is any damage or missing parts. If there is, please feel free to contact us by xxxxx@gmail.com or call us at: **(747)955-8436 [MON.-FRI.10:00a.m.-5:00p.m.]** or find us at Amazon by following steps:

- Open "Orders" at Amazon, find the product you have purchased and open the product page;
- Click "Ask a question" on the redirected page;
- Click "An order I have placed" in the chat with Seller Messaging Assistant ;
- Click in sequence "Your product", "Other", "Troubleshooting" from available options, you will see a message box after that.

Please leave us a message, and we will reply within 24 hours.

SAFETY INSTRUCTIONS

Thank you very much for choosing our led lighted mirror. For your safety, it is very important that the following instructions are read carefully and completely before beginning the assembly and installation of this lighting fixture:

WARNING -TO REDUCE THE RISK OF BURNS, FIRE, ELECTRICAL SHOCK OR INJURY TO PERSONS:

1. It is strongly recommended that two or more adults install this led lighted mirror.
2. Disconnect power at the circuit breaker before putting on or taking off parts. To disconnect, turn all controls to the off position, then disconnect power from the AC/DC adaptor.
3. Use only power adaptor that was provided with this product. Using a different power adaptor will damage the lights and may cause fire, electrical shock hazard.
4. Always wear suitable eye protection before drilling.
5. Keep the voltages between 110V and 120V. If the voltage exceeds 120v, please use the transformer.
6. Use this furnishing only for its intended use as described in these instructions. Do not use attachments/accessories not recommended by the manufacturer.
7. Never operate this furnishing if it is not working properly or if it has been dropped or damaged, or dropped into water.
8. Do not use outdoors. FOR HOUSEHOLD AND INDOOR USE ONLY.
9. Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
10. The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction. Children should be supervised to ensure that they do not play with the appliance.





CAUTION:


1. Risk of Electrical Shock – Connect this furnishing to a properly grounded outlet only.
2. Grounding Instructions: This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.

PRE-ASSEMBLY

PRE-ASSEMBLY ATTENTIONS:

- 1. After opening the package, please inspect the product immediately for any damage during transit or missing parts.
- 2. Remove all parts and hardware from the box along with any plastic protective packaging.
- 3. Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.
- 4. Before drilling, please ensure there are no hidden cables or pipes (water, gas, or electrical) behind hanging points.

What's in the box			
No.	Description	Draw	QTY.(pcs)
A	Led Lighted Mirror		1
B	Top Mounting Bracket		Ref. to Page 8
C	Anchor A & Short Screws		Ref. to Page 8
D	Anchor B & Long Screws		Ref. to Page 8
E	EVA Gasket		4
F	Bubble Level		1

TOOLS (not included)		
		
Electric Drill	Safety Goggles	Tape Measure
		
Phillips-head screwdriver	Hammer	

WALL ANCHORING

Secure it! Wall Anchoring Guide

This mirror must be securely attached to the wall. The hardware used to secure your mirror to the wall depends on your wall material. If your wall material is not listed or if you have any questions, consult with a local hardware retailer.


Thickness of Wall	Applicable Anchors&Screws	Recommended Drill Bit	Recommended Drill Depth
>5/8"(16mm)		5/16"(8mm)	50mm
5/16"-5/8"(8-16mm)		25/64"(10mm)	
<5/8"(8mm)		Unapplicable	Unapplicable

WALL MATERIAL

Masonry (concrete or brick
Mortar)

ANCHORING DEVICE (Anchor A Set)

Plug with screw.




WALL MATERIAL

Drywall or plaster with available
wood stud

ANCHORING DEVICE (Anchor A Set)

Screw inserted directly into stud
or plug with screw.

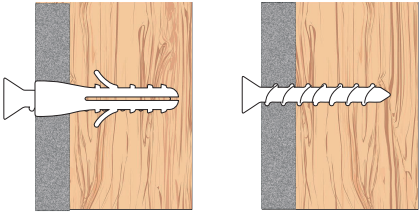

WALL MATERIAL

1. Drywall without available wood stud
2. Hollow Wall

ANCHORING DEVICE (Anchor B Set)



WIRE CONNECTION


Safety First! Wire Connection Guide

There are two ways to connect the power. You can connect the wires directly to your junction box or insert the plug directly into the wall socket.

- Grounding Instructions: This product must be connected to a grounded metal permanent wiring system or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the product.

PLUG IN

Insert the plug to the socket




HARDWIRED

Cut the electric wire and make connection with junction box.


DEVICE

Junction box (not included).




DANGER: Before installation, make sure the main power is cut off.

HOW TO CONNECT THE WIRES




Using wire connector caps

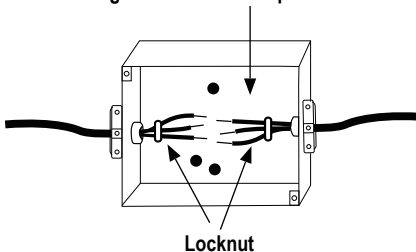


★ junction box is not included ★

BLACK WIRE --- POWER SUPPLY L (LINE)
WHITE WIRE --- POWER SUPPLY N (NEUTRAL)
GREEN WIRE --- POWER SUPPLY G (GROUND)

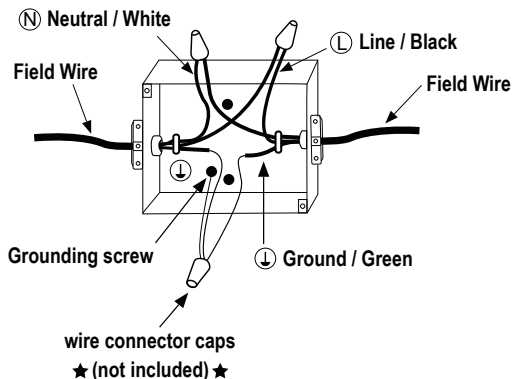


EASY INSTALLATION

①

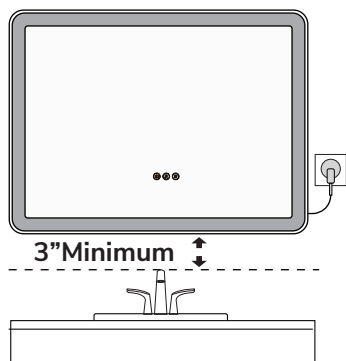


We recommend that the bottom of the mirror be at least 3 inches above the top of the faucet.

②

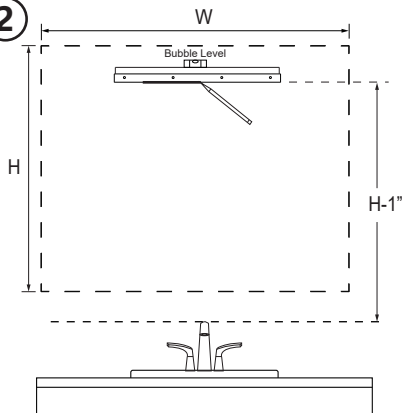


Hold the mounting bar level against the wall. Use the provided spirit level to ensure it's level. Mark a line on the wall.

③

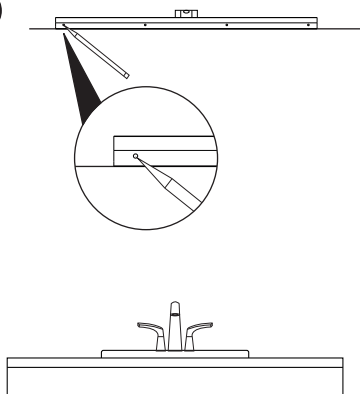

Mark the hole locations on the wall.


④

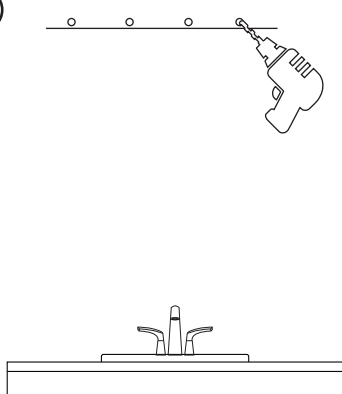

Drill holes in the wall.


EASY INSTALLATION

5




Use a hammer to insert the expansion screw into the hole.

6

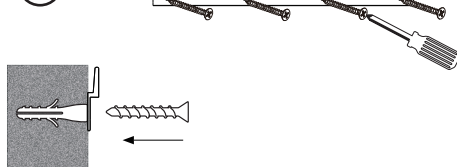


Secure the mounting bracket with screws.

7

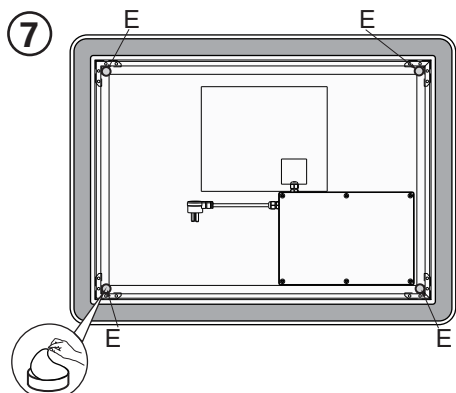

As illustrated in the diagram, remove the adhesive backing from the EVA gaskets and attach them to the corners.

8

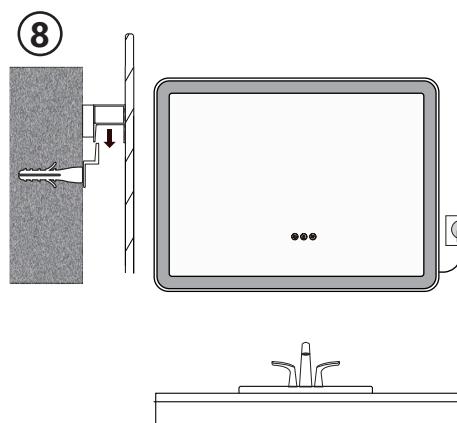

Connect the power supply (ref. to page 4)
2 adults to hang the mirror.

BUTTON CONTROL

TURN ON/OFF:

Tap  once to turn the light ON or OFF.

3 COLOR TEMPERATURES:

You can select the color temperature by touching the button :
warm light; natural light; white light

STEPLESS DIMMING:

Long Hold  to dim or brighten the light. (Factory setting: the brightness has been adjusted to 100%; if you think it is too dazzling, you can long press it again to reduce the brightness to your preference)


DEFOGGER:

The anti-fog function helps resist the troubling fog and keep a clear reflection image. When the defogger is on, this button  should be in white color. To save energy, it will automatically turn off after 60 minutes.

TURN OFF THE BUTTONS BACKLIGHTING:

When the defog function is off (indicated by the backlighting of all 3 buttons being yellow), long press this button  to turn off the button backlighting.

30mm
1.18"

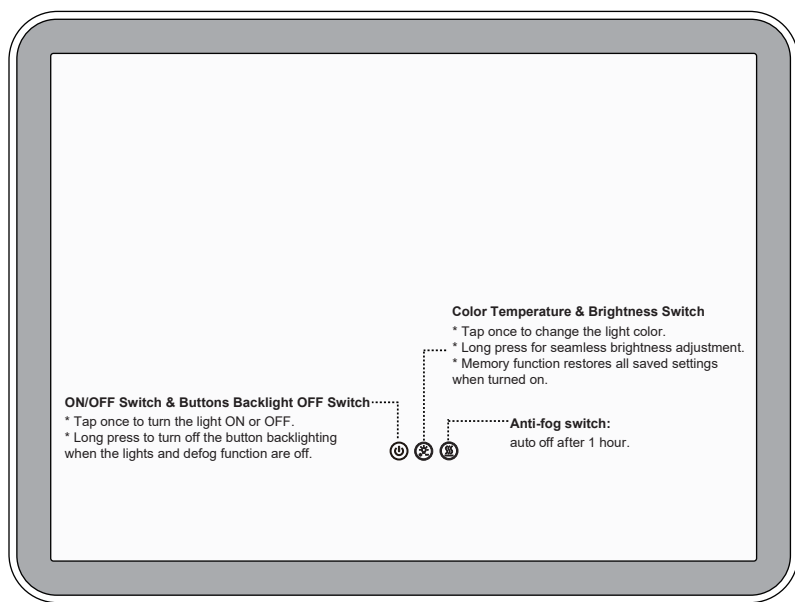

PRODUCT SPECIFICATION

Dimension	Size (mm)	Input Power	Defog Size (mm)	Mounting Bracket (mm)	No. of Top Mounting Bracket	No. of Archor A+ Short Screws Set	No. of Archor B+ Long Screws Set
16"x24"	406x607x30	24W	150x200	200	1	2	2
20"x28"	508x710x30	24W	250x250	280	1	3	3
24"x32"	607x810x30	36W	300x400	410	1	4	4
24"x36"	607x912x30	36W	300x400	410	1	4	4
28"x36"	710x912x30	36W	300x400	410	1	4	4
30"x30"	760x760x30	36W	300x400	410	1	4	4
24"x40"	607x1016x30	36W	300x400	280	2	6	6
32"x40"	810x1016x30	36W	350x500	500	1	4	4
32"x48"	810x1216x30	48W	350x500	410	2	8	8
30"x55"	760x1397x30	48W	350x800	410	2	8	8
36"x55"	912x1397x30	48W	350x800	410	2	8	8
28"x60"	710x1524x30	48W	300x800	410	2	8	8
36"x60"	910x1524x30	48W	350x800	410	2	8	8
36"x72"	910x1824x30	60W	350x1000	500	2	8	8

OTHER SPECIFICATION:

PARAMETER	SPECIFICATION
Stepless Dimming	10%-100%
Color Temperature	3000K/4000K/6500K
LED Life Span	50,000 hours
CRI	90+
Anti-fog	YES
Memory Function	YES
Tempered Glass	YES
Input Voltage	120V AC
Output Voltage	24V DC
Working Temperature	-20 ~ +50°C
Wiring Method	Hardware/Plug in
Switch	Touch Sensor

CUSTOMER SERVICE

WARRANTY:

This product is guaranteed to operate 1-YEAR from the original date of purchase. This warranty is considered void if the product fails from misuse. If, under normal use and for the full time period, your product fails to operate, please contact us via email: tfmirror@gmail.com. We will be glad to solve the problem for you!

CARE & CLEANING:

1. Use a household liquid glass cleaner to keep the mirror surface clean.
2. Do not use abrasive cleaners containing ammonia.

CONTACT US:

Email: xxxxx@gmail.com

Phone: [xxxxx](tel:xxxxx) (MON.-FRI.10:00a.m.-5:00p.m.)