
FAMYYT

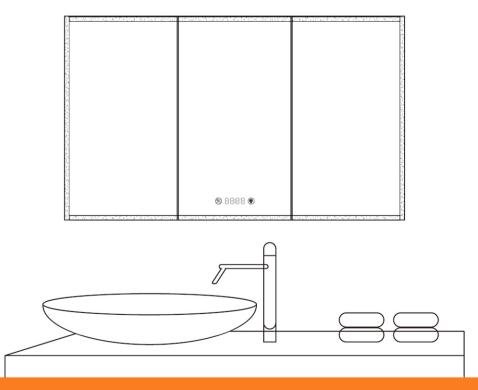

INSTALLATION MANUAL


INSTALLATION GUIDE

IMPORTANT SAFETY INSTRUCTIONS

When using an electrical furnishing, basic precautions should always be followed, including the following. Read all instructions before using (this furnishing).

DANGER - To reduce the risk of electric shock:

- 1. Always unplug this furnishing from the electrical outlet before cleaning or servicing.
- WARNING To reduce the risk of burns, fire, electric shock, or injury to persons:
- 1. Unplug from outlet before putting on or taking off parts.
- 2. Close supervision is necessary when this furnishing is used by, or near children, invalids, or disabled
- 3. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.
- 4. Never operate this furnishing if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped into water. Return the furnishing to a service center for examination and repair.
- 5. Keep the cord away from heated surfaces.
- 6. Never operate the furnishing with the air openings blocked. Keep the air openings free of lint, hair, and the like.
- 7 Never drop or insert any object into any opening.
- 8. Do not use outdoors.
- 9. Do not operate where aerosol (spray) products are being used or where oxygen is being administered. 10. To disconnect, turn all controls to the off position, then remove plug from outlet.
- 11. For grounded products the following st tement: WARNING: Risk of Electric Shock Connect this furnishing to a properly grounded outlet only See Grounding Instructions. "This product is for use on a nominal 120-volt circuit and has agrounding plug that looks like the plug illustrated as below. Make sure that the productis connected to an outlet having the same configuration as the plug. No adapter shouldbe used with this product.



- 12. Mount furnishings at the correct height.
- 13. Mount only approved work surfaces and secondary surfaces (shelves) in accordance with instructions Failure to do so may cause instability, collapse, or failure of electrical components. [Applicable to furnishings that are not provided with a work surface and/or secondary surfaces (shelves)]

SAVE THESE INSTRUCTIONS

"SUITABLE FOR DAMP LOCATIONS [CONVIENTAUX EMPLACEMENTS HUMIDES] For Household / Residential Use Only [POUR LUSAGE MENAGER / RESIDENTIEL SEULEMENT]"

IMPORTANT SAFETY INSTRUCTIONS

When using an electrical furnishing, basic precautions should always be followed, including the followina:



WARNING: To reduce the risk of burns, fire, electric shock or injury to persons. Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. Never drop or insert any object into any opening. Do not use outdoors.



WARNING: Risk of electric shock. Connect this furnishing to a properly grounded circuit only. See grounding instructions.

ELECTRIC CONNECTIONS

ALL WIRING SHOULD BE DONE BY A QUALIFIED LICENCED ELECTRICIAN.



WARNING: Shut off power before wiring.

Requires 120 VAC 20 Amp GFI protected Circuit.

GROUNDING INSTRUCTIONS:



CAUTION: This product must be connected to a grounded metal permanent wiring system or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment grounding terminal or lead on the product.





WARNING: An Electrical option mirror must be wired to a 20 Amp GFI(Ground Fault Interrupter) protected circuit when used in bathrooms and all other locations required by the National Electric Code

HOW TO CONNECTIONS

The electric wire comes through the access hole on the top of the cabinet. exact location of access hole varies depending on the product models. Please refer to the actual product for the exact location.









HARDWARE AND TOOLS (Tools not included)

INSTALLATION INSTRUCTIONS

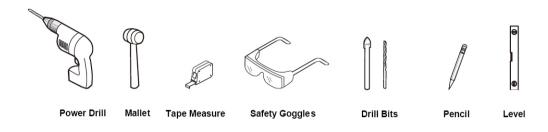

HARDWARE LISTS				
ITEM	IMAGE	NAME		
1		Mounting Screw		
2		Wall Anchor		
3		Glass Shel f		
4	(a))))))	Side Mirror Screw		
5		French Cleat		
6		Flathead Screwdriver		
7	Positioning Suler 1 (1) (222 2mm) Positioning Suler 1 (1) (222 2mm) An even where where the suler su	Positioning Ruler		
8		Allen Wrench		

APPIY TO BELOW STYLE OF RGB MEDICINE CABINET

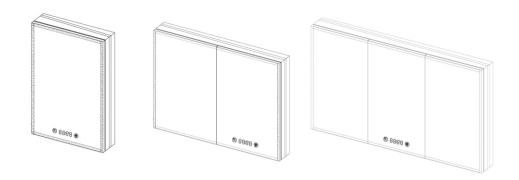

Please read carefully and save these instructions

Don't discard any of the packaging until you are sure that you have all of the parts and the fitings

Make sure power to the junction box is off before commencing installation

IMPORTANT

- 1. Unpack RGB Medicine Cabinet. DO NOT lay cabinet on tiled or concrete surface prior to installation Cabinet must be on protected surface to prevent chipping of the corners
- 2. Care must be taken before drilling pilot holes to avoid any existing wiring or pipe work that may be concealed.
- 3. A certified electrician must perform all work. The mirror must be connected to a GFI

MAINTENANCE

Wipe clean with a soft damp cloth. Apply glass cleaner to cloth and do not apply directly to mirror Never use abrasive cleaners as these could damage the finish or exposed RGB strip 2

INSTALLATION

Please refer to below surface mount method.

SURFACE MOUNT INSTRUCTION

SURFACE MOUNT INSTRUCTION


Step 1

Unpack the RGB medicine cabinet and prepare tools needed.




Step 2

Draw horizontal line connecting the marked location, The line should be level. Adjust to level if necessary. Glue the positioning ruler to the mark.




Step 3


Drill holes, and put in the plastic expansion bolt.

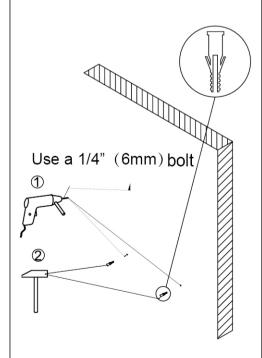

Step 4


Attach the bottom mounting bar hanger to the wall with mountin screws from the hardware pack.




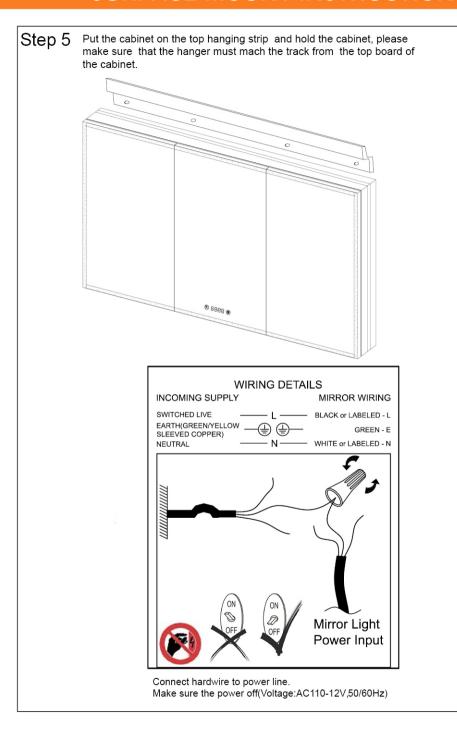

SURFACE MOUNT INSTRUCTION


SURFACE MOUNT INSTRUCTION

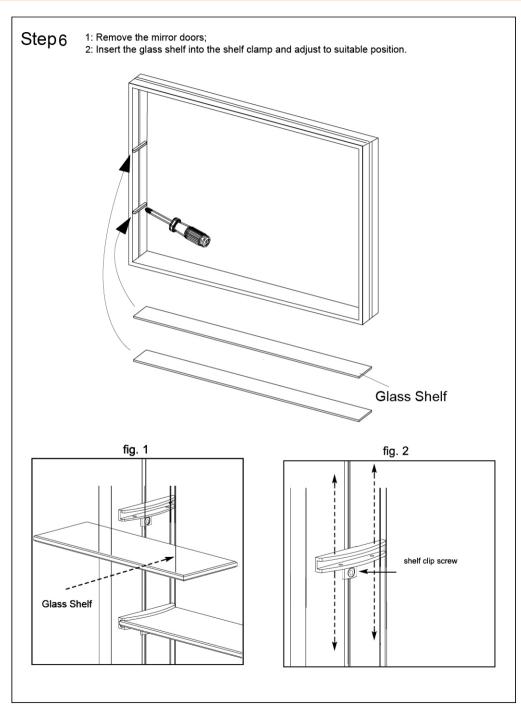

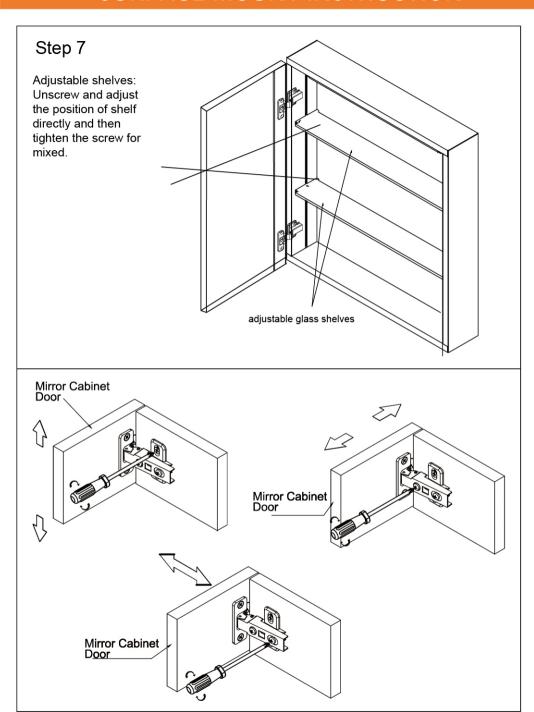


7

INTRODUCTION OF TOUCH FUNCTION

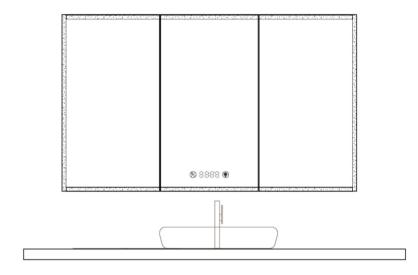









1.Click the power button to turn the light ON/OFF.

2. When turned on, long press the button for dimming.

3. When off, long-press the button until the backlight flashes blue, then click to set light activation speed.


4. When off, long-press the button for 6 seconds until the backlight flashes white. Short click to increase light strip length, long click to decrease.



- 1. Time and room temperature auto switch every 8-10 seconds.
- 2. Automatically dim display brightness from 22:00 to 06:00 to reduce nighttime glare.



- 1.Long press 3s to enter settings. Display '24 HR', blink; short press to toggle 24/12-hr.
- 2. Then long press again, hours blink, short press to adjust hours.
- 3. Then long press again, minutes blink; short press to adjust minutes.
- 4.Then long press again, temperature blink, short press to adjust ℃ / ℉ 5.Short press to turn on/off the anti-fog function, which automatically turns off after 1 hour.

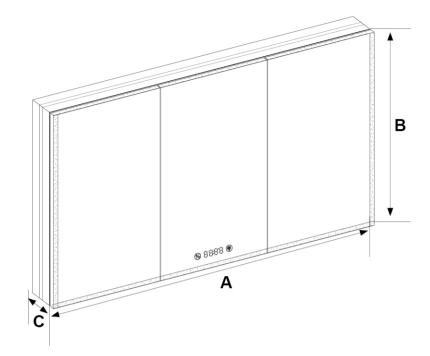

Α-	Width
В-	Height
C -	Denth

Unit: Inch

SKU#	Α	В	С
FMECARGB6036	60	36	5.3
FMECARGB4836	48	36	5.3
FMECARGB2028L	20	28	5.3
FMECARGB2028	20	28	5.3

Note: All dimensions & specifications are approximate and subject to change without notice.

Customer Service:

For any questions or queries regarding our products, please contact our support team

Email: FAMYYT-Jane@outlook.com

Website: http://famyyt.cn/

9