

# EXL4 Slim LED Exit Sign

The NICOR EXL4 Series presents a very slim design, only 1" deep! This UL924 code compliant solution for exit and emergency requirements offers all code requirements in a smaller package. The evenly illuminated exit sign is available with red or green stencils. The maintenance free nickel cadmium battery provides 90 minutes of back up power. The EXL4 Series offers flexible installation for surface ceiling, wall or end mount options along with field adjustable chevrons for universal configuration based on your application's directional needs.

## Construction

- Injection molded thermoplastic ABS housing, UL-94-V-0 rated material

## Optical System

- Uniform lighting with specially designed plastic diffuser to prevent shadowing

## Electrical

- Operating temperature rating of 5°F to 104°F (-15°C to 40°C)
- Maintenance-free nickel-cadmium battery provides 90-minute emergency operation and recharges in 24 hours
- 120/277VAC Dual voltage operation, 60Hz input
- Fully-illuminated 6" letter height with 3/4" stroke
- Includes test switch/power indicator light

## Finish

- White textured thermoplastic housing
- Available with either red or green lettering

## Installation


- Surface ceiling, wall or end mount installation options
- Snap-in mounting bracket
- Universal mounting plate with EZ quick connect
- Universal knockout pattern provided on housing for surface mount install
- Field-installable, removable chevron directional indicators for all configurations
- Supplied with two faces for single or double face installation

## Compliance

- UL 924
- Listed for damp locations

## Warranty

- 2-year limited system warranty standard
- Warranty does not cover product failure due to an overvoltage event (power surge)

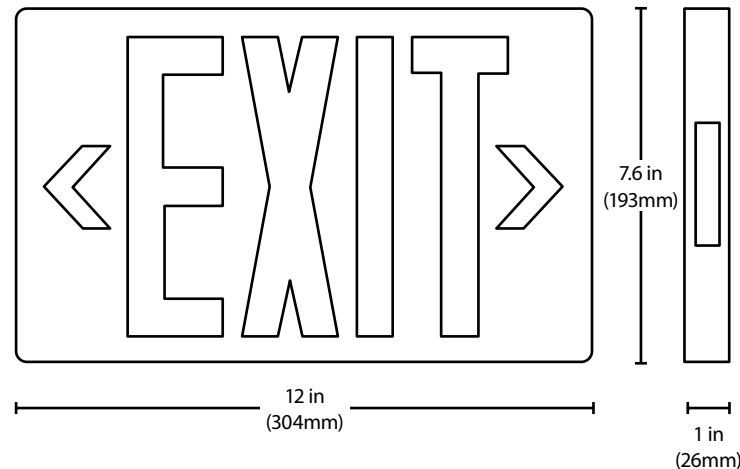

Product Information	
Input Voltage (VAC)	120/277
Power Draw (W)	1.6W
Emergency Operation	Minimum 90 Minutes



# Applications



The EXL series can be installed in many applications such as theaters, gymnasiums, etc.

# Installation



Installation of the EXL4 is easy with the included snap-in mounting plate.



The EXL4 Series offers flexible installation for surface ceiling, wall or end mount options along with field adjustable chevrons for universal configuration.

Ordering Information					
Series	Version	Voltage	Housing Color	Letter Color	Number of Faces
EXL4	1 (Version 1)	UNV (120/277VAC)	WH (White)	G (Green)	2 (Single and Double)
				R (Red)	