

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape



Phillips screwdriver



Flat blade screwdriver




Pliers




Wire strippers


HARDWARE INCLUDED



Fixture



Cover



Screws




Rubber Rings



Wire Nuts

* PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

EXPLODED PARTS

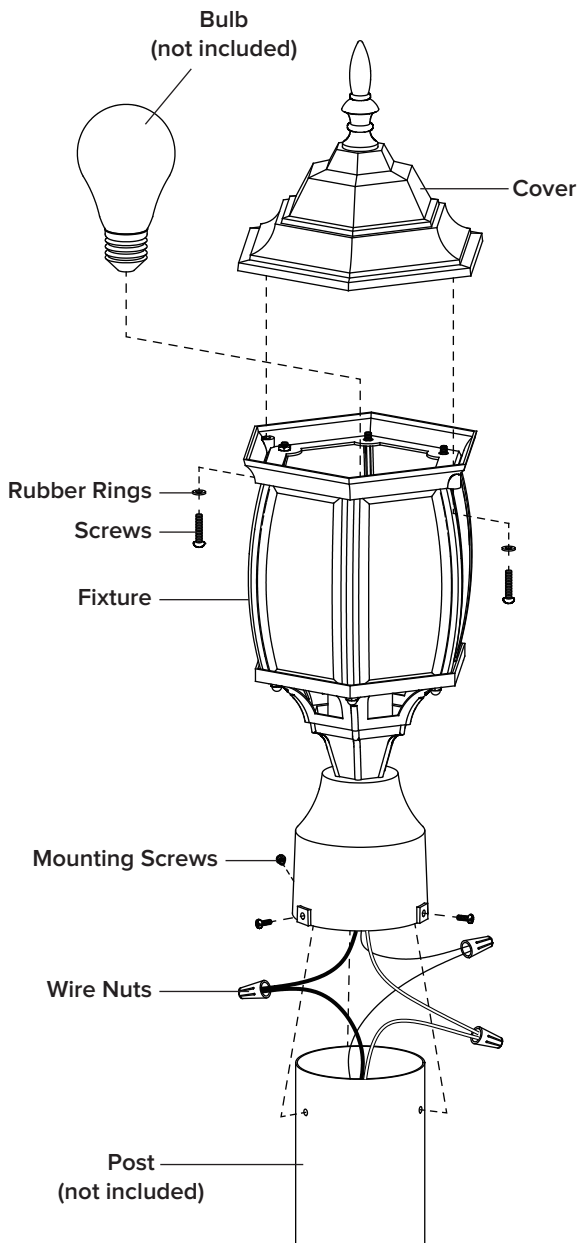

Bulb
(not included)

Cover

Rubber Rings

Screws

Fixture


Mounting Screws

Wire Nuts


Post
(not included)

INSTALLATION

STEP 1
Unscrew the **mounting screws** from the **fixture**.

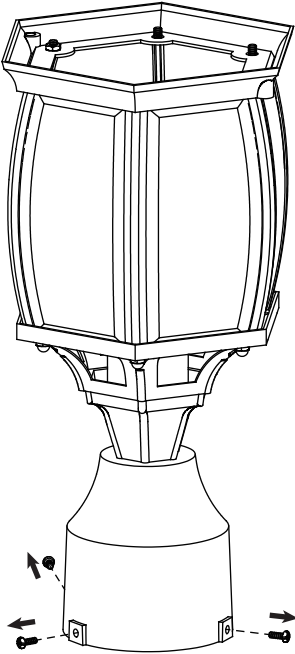

STEP 2
Make the electrical connection from the **post** (not included) to the **fixture**. Connect the live wire, neutral wire and ground wires with the supplied **wire nuts**. Secure with electrical tape.

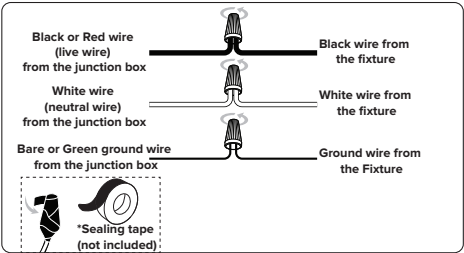

Black or Red wire (live wire) from the junction box

White wire (neutral wire) from the junction box


Bare or Green ground wire from the junction box

Black wire from the fixture

White wire from the fixture

Ground wire from the Fixture

*Sealing tape (not included)

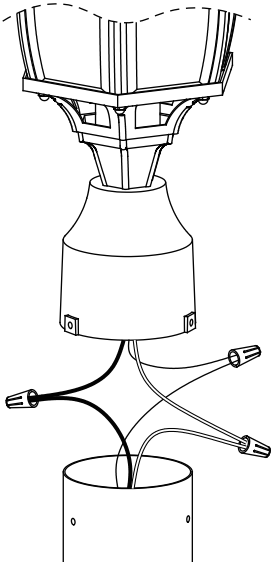


*Accommodates a 3 in. post (not included)

STEP 3


Attach the **fixture** to the **post** (not included) through screw holes as shown, and secure it with **mounting screws**

*Accommodates a 3 in. post (not included)

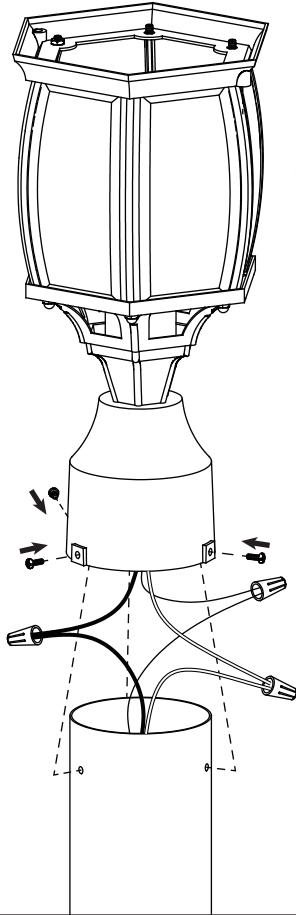

STEP 4

Attach the **fixture** to the **post** (not included) through screw holes as shown, and secure it with **mounting screws**

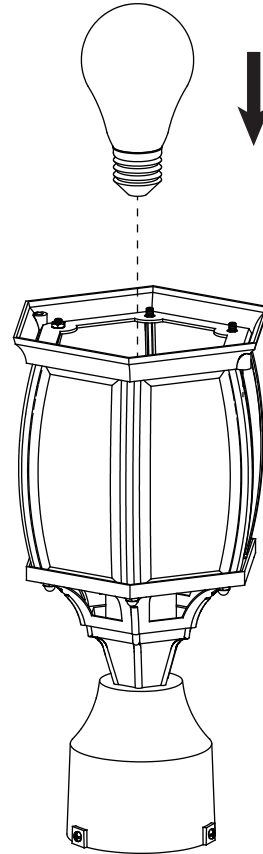

STEP 5

1. Remove the **rubber rings** and **Screws** from the **cover**.
2. Use the **rubber rings** and **Screws** to attach the **cover** to the **fixture**.

