


8243PL-04BK-US / 8243PL-04GD-US

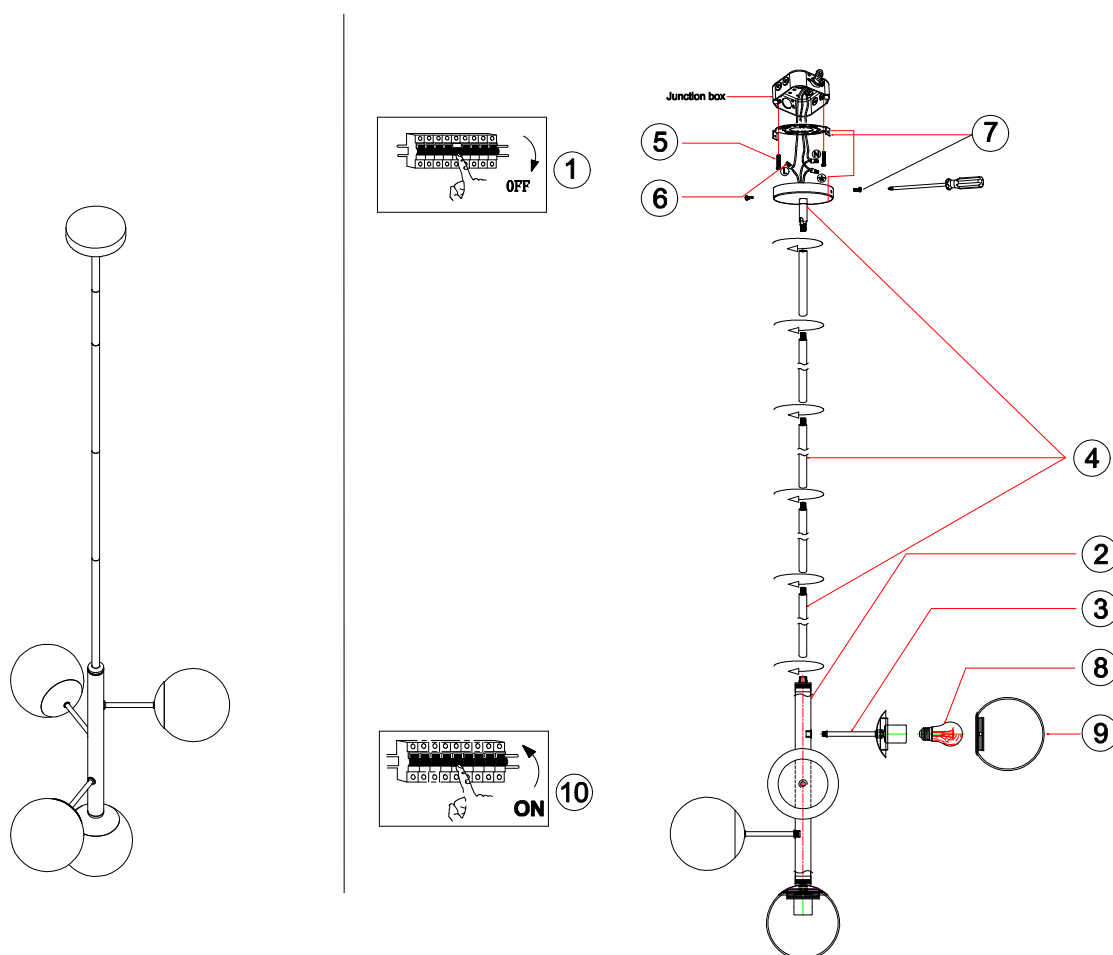

- 1: Turn off the main power supply.
- 2: Carefully remove the entire lamp from the packaging box.
- 3: Insert the lamp head part into the thick straight tube.
- 4: Insert the double inner tubes directly into the wires and then thread them into the threaded connections on the thick straight tube (the long tube at the bottom and the short tube at the top).
- 5: Use the attached fixing screws to secure the installation bracket to the electrical junction box on the wall.
- 6: Tighten the wiring end cover in the correct manner
- 7: Tighten and fix the installation plate onto the junction box, and then secure the screws on both sides of the ceiling.
- 8: Turn the E26 bulb into the lamp socket.
- 9: Insert the glass cover into the lamp base.
- 10: Turn on the main power supply, and the lights will come on.