



ITEM #: RVL-CC7570-20

IMPORTANT SAFETY INSTRUCTIONS

- To avoid injury or damage, mount only on a surface that is sturdy.
- To avoid electric shock, make sure the electricity is turned off at the main circuit breaker panel. If you are replacing an existing fixture, turn off the following in order: fixture, wall switch, and main fuse or breaker box.
Note: Some types of fuses must be unscrewed to shut the power off.
- If you are unclear as to how to proceed, please consult a licensed electrician.

UNPACK THE FIXTURE: Check the contents of the box. Box should contain all items on the parts diagram.



For any replacement parts or installation issues, please Contact Us!


Email: help@kira-home.com

Facebook/Instagram: @KiraHomeDecor

Phone: 888.208.2085

ASSEMBLY INSTRUCTIONS


1. Lay out all 4 pieces of Fixture Arms (M) so that the smaller wheel is sitting within the larger wheel to form their circular shapes.
2. Remove Screws (Q) and Metal Plate (P) from each Ring Joint (O). Set them aside.
3. Secure Fixture Arms (M) to each other by connecting Power Plugs (V) together. Once connected, gently push them within Fixture Arms (M). Place Ring Joint (O) under each arm with the decorative knob facing outwards, ensuring to line up all holes. Secure in place with Metal Plate (P) and Screws (Q) being careful not to pinch any wires. Do this for each set of Fixture Arms (M) to create the wheel shape.
Note: Tighten all Screws (Q) evenly to ensure all sides sit level.
4. On the larger wheel, thread together Attached Rods (N), pulling through any necessary Wire (H). Unwind Wire (H). Unscrew Wing Nut (T) and Lock Washer (R) from the top of Attached Rods (N). Complete this step for the smaller wheel.
5. Remove Pendant Loop (I) from Center Connector (L) by turning it in a counter-clockwise direction. Remove Connector Plate (U) from Center Connector (L).
6. Thread Wire (H) up through one of the holes in Center Connector (L) until the threading from Loop (S) is protruding through the hole in Center Connector (L). Secure Loop (S) in place with Lock Washer (R) and Wing Nut (T). Complete this step for both Wires (H).

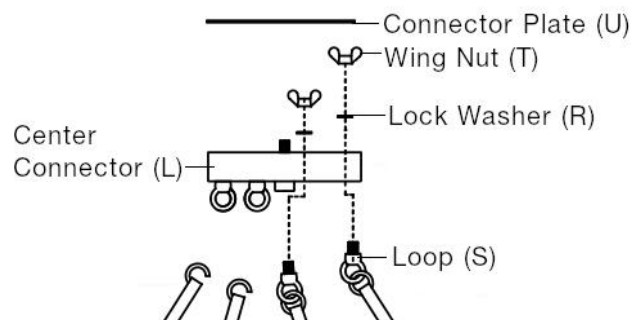


7. Feed both sets of Wires (H) through the holes in Connector Plate (U). Replace Connector Plate (U) over the nipple on Center Connector (L) and secure in place with Pendant Loop (I).

INSTALLATION INSTRUCTIONS

1. Secure Mounting Plate (A) to the junction box (not included) using Mounting Screws (B) provided. Ensure the attached Screw Collar Loop (E) is pointing down towards the floor.
2. Remove Threaded Ring (F) from Screw Collar Loop (E) by unscrewing it in a counter-clockwise direction. Set Threaded Ring (F) aside.
3. Place Canopy (D) against the ceiling with Screw Collar Loop (E) protruding through the hole in Canopy (D). Adjust Screw Collar Loop (E) and the hex nut above it until 3/8" of the threaded portion of Screw Collar Loop (E) is visible. Remove Canopy (D) and set it aside.
4. Assemble one end of Chain (G) to Pendant Loop (I) by opening Quick Link (J) closing it around Pendant Loop (I).
5. With chain pliers, remove excess Chain (G) to achieve desired hanging length. Once Chain (G) is to desired length, use wire cutters to cut Wire (H) 10" beyond the length of Chain (G) for easier wire connection.
6. Weave Wire (H) upwards through every 4-5 links in Chain (G).
7. Slide Threaded Ring (F) down Chain (G) and Wire (H) with the raised end (flange) facing up towards the ceiling. Slide Canopy (D) down Chain (G) and Wire (H).
Note: Threaded Ring (F) and Canopy (D) will be used to secure the fixture to ceiling at a later step.
8. Attach Rods (W) onto rings on bottom of Center Connector (L) and onto Fixture Arms (M) with the attached hooks. Carefully lift the fixture (with the help of a friend).
9. Secure Pendant Loop (I) to Screw Collar Loop (E) with Quick Link (J).
10. Insert the end of Wire (H) through the hole in Screw Collar Loop (E) into the junction box.
11. Using the wire graph below, connect the appropriate wires from the fixture to the corresponding wires in the electrical junction box (not included) and secure Wire Connectors (C).

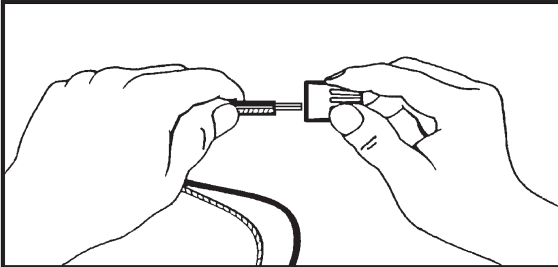

Connect to BLACK house wire	Connect to WHITE house wire
BLACK 	WHITE 
PARALLEL WIRE (ROUND & SMOOTH) 	PARALLEL WIRE (RIBBED / RIDGED) 
WHITE OR GREY WITH TRACER 	WHITE OR GREY WITHOUT TRACER 
BROWN, GOLD OR BLACK WITHOUT TRACER 	BROWN, GOLD OR BLACK WITH TRACER 

- A. Connect the ground wire (bare copper or green) from your fixture to the:
 - 1) ground wire in the junction box, or
 - 2) ground screw in the junction box
- B. Connect the BLACK house wire to fixture hot wire that corresponds to diagram (black, round & smooth, white/gray with tracer, brown/gold without tracer).
- C. Connect the WHITE house wire to fixture neutral wire that corresponds to diagram (white, ribbed/ridged, white/gray without tracer, brown/gold with tracer).

- 12.** Place all Wires (H) and Wire Connectors (C) back into the junction box.
- 13.** Slide Canopy (D) and Threaded Ring (F) up Wire (H). Place Canopy (D) flush against the ceiling and secure in place by screwing Threaded Ring (F) onto Screw Collar Loop (E) in a clockwise direction.
- 14.** Install bulbs (not included) into Socket (K).

Enjoy your new fixture!

Kira Home

ITEM #: RVL-CC7570-20 - PARTS DIAGRAM

HELPFUL TOOLS: Safety Goggles, Screwdriver, Wire Cutter/Stripper, Ladder

