


Assembly Instruction

Easy Installation

D.I.Y

WARNING! PLEASE PLACE ALL THE PRODUCTS AT ROOM TEMPERATURE. DO NOT STORE BIDETS AND ITS ACCESSORIES IN FREEZING TEMPERATURE ENVIRONMENT BELOW 32 DEGREE FARENHEIT.

1. NAMES AND FUNCTIONS OF ACCESSORIES

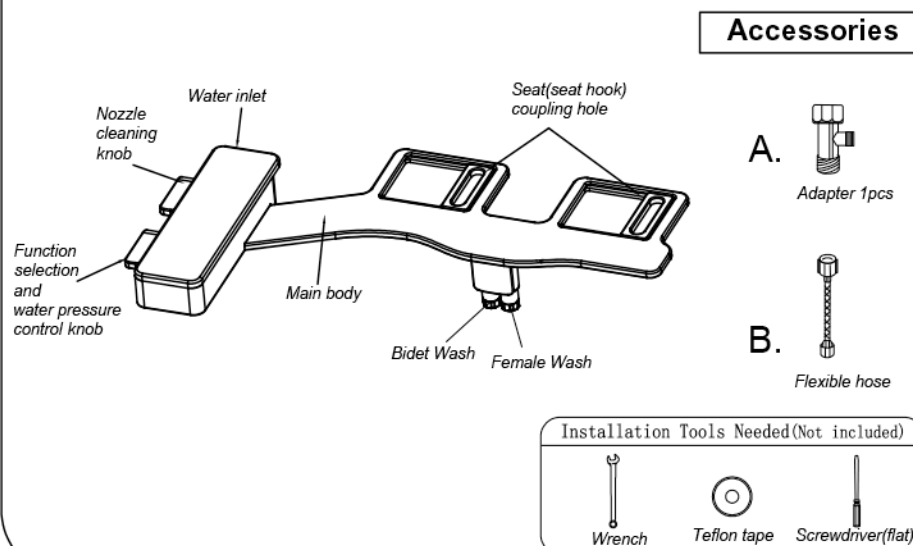

2. INSTALLATION

PREPARATION


- 1.Remove the existing toilet seat .
- 2.Turn off the water valve.

3 .Flush toilet to drain tank completely.

4.Disconnect exiting water pipe

5. Attach adapter to water valve pipe and exiting water pipe,use teflon tape.

Installation

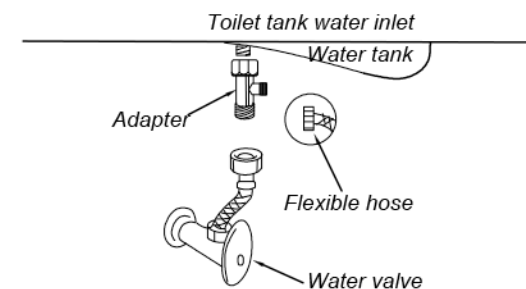


HELPFUL TIP:

Over tightening can cause damage to the threads and result in water leakage. Use only hand pressure first and check for any leakage. Turn only less than quarter turn at a time making sure there is no leakage.

3. FINAL ASSEMBLED FIGURE

Attach flexible hose to the adapter and bidet
Turn on water valve to use.

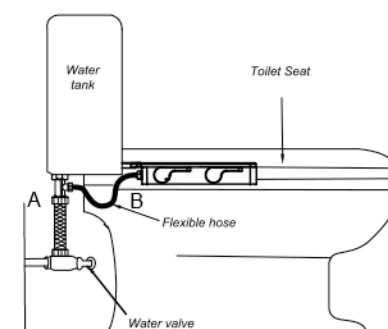

TRYING FOR THE FIRST TIME

Ensure both Lever 1 and 2 are horizontal off state, turn on the water valve to use
Lever 1: Cleaning nozzles, Pull it up to clean the nozzles.

Lever 2: For function selection and water temperature control
A. Pull it up for female wash, the more you pull it the bigger the water flow
B. Push it down for bidet wash , the more you push it the bigger the water flow

Turn off the knobs manually after use

