


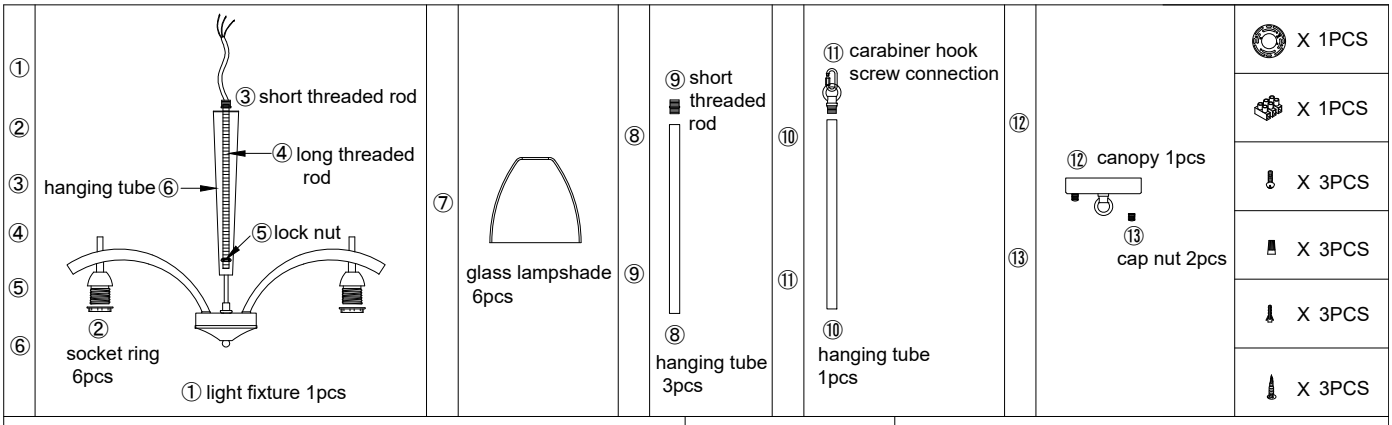


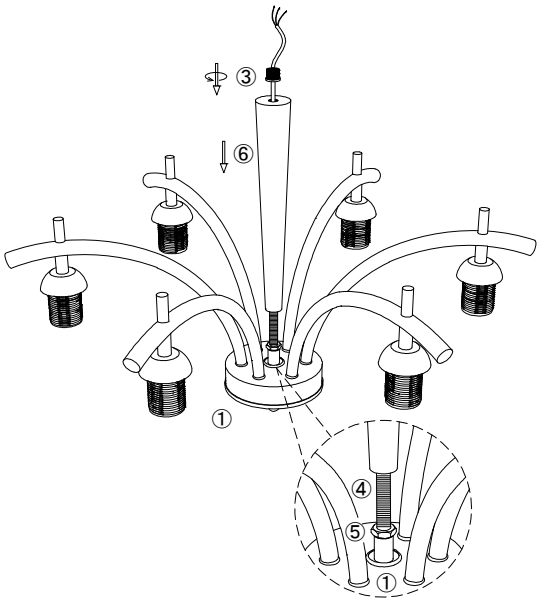

1.Loosen and remove out the short threaded rod ③ from rod ④, rotate to install the long threaded rod ④ to the fixture ① , fasten the rod ④ with lock nut ⑤, let the tube ⑥ go through the rod ④, fixed it with short threaded rod ③.




can connect more tubes to get the height you need

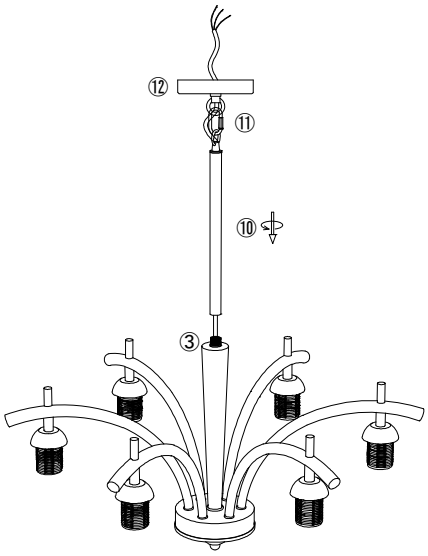


2.Let the wire of the fixture ① go through the tube ⑩, rotate to install the tube ⑩ to the fixture. (can connect more tubes to get the height you need)

3.Hang the fixture to the canopy ⑫ with carabiner hook screw connection ⑪, let the wire go through the ring ⑪ and canopy ⑫.

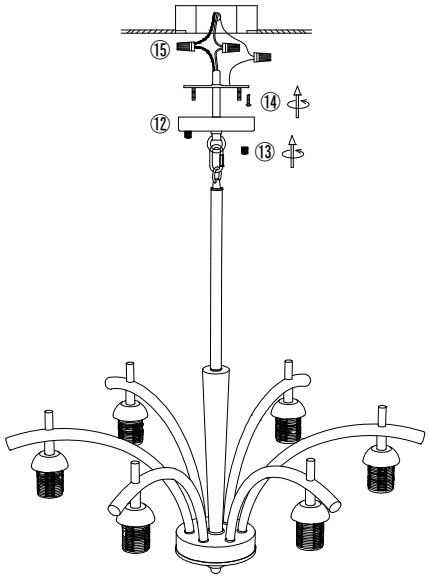

4.Install the bracket to the ceiling junction box with screw ⑭.
5.Connect the wire to your home line with cap connector ⑮.
6.Install the fixture to the bracket with cap nut ⑬.

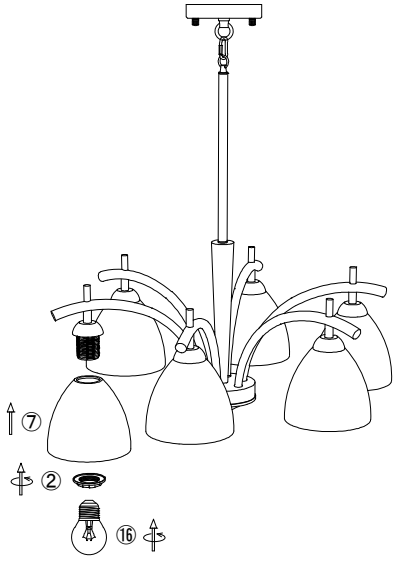

suggest to use G45 pingpong bulb !

7.Install the lampshade ⑦ to the bulb holder with socket ring ② and install the bulb ⑯.(bulbs are not included in the package)

D7063-6

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !