


# Installation & Assembly

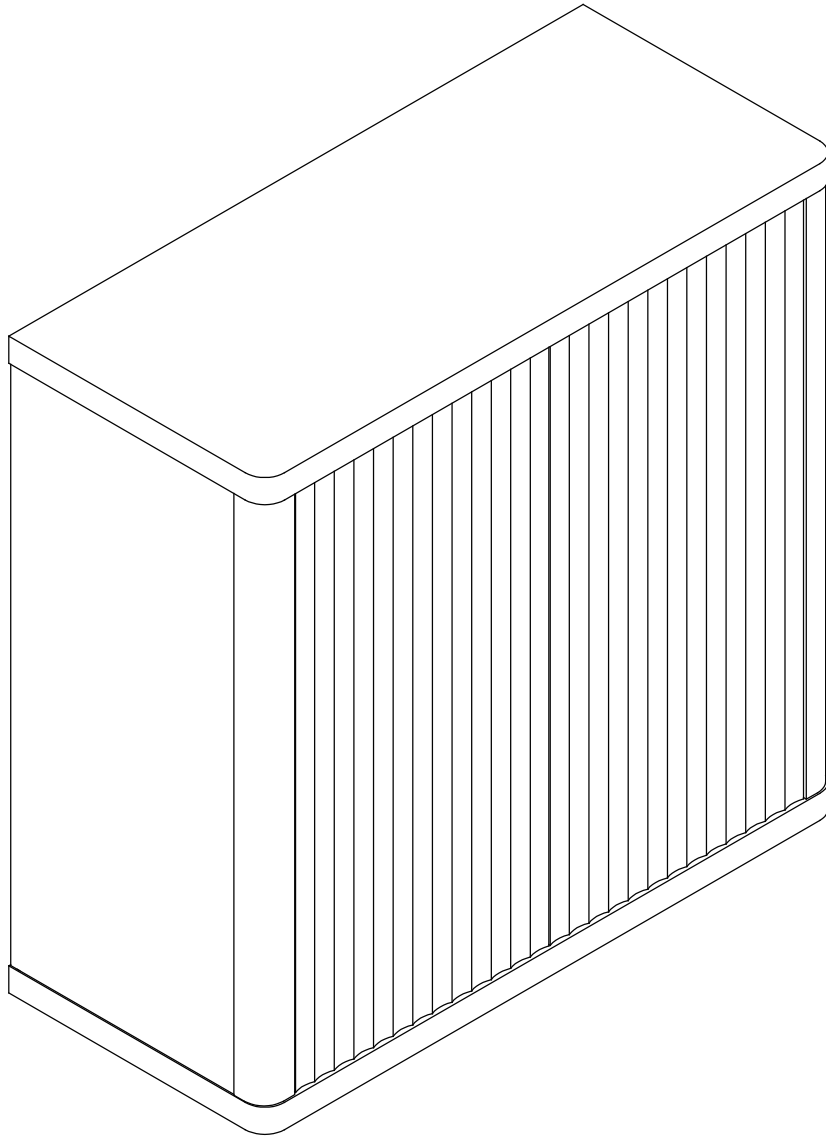

**Made In China**

# Assembly Instructions

Before beginning the assembly process, please read and save these instructions for reference. Following these guidelines will ensure a smooth and successful assembly of your product.

## 1. Part Identification:

Carefully separate and identify all the parts included in your package. Confirm that you have all the components listed in the instruction manual. This step will help you avoid any missing or misplaced parts during assembly.

## 2. Work Surface:

To prevent any scratches or damage to the product, assemble it on a soft mat or a similar protective surface. This will provide a cushioned area for the components and protect the surfaces from unwanted marks.

## 3. Step-by-Step Assembly:

Follow the assembly instructions provided, proceeding one step at a time. Take care to understand each step properly before proceeding to the next one. This sequential approach ensures that the assembly is done correctly and minimizes the chance of errors.

## 4. Proper Screw Seating:


When attaching screws and nuts, it is essential not to fully tighten them until all screws are correctly seated. By partially tightening each screw and nut initially, you can ensure that they are aligned properly and fit securely before final tightening.

## 5. Avoid Over-Tightening:








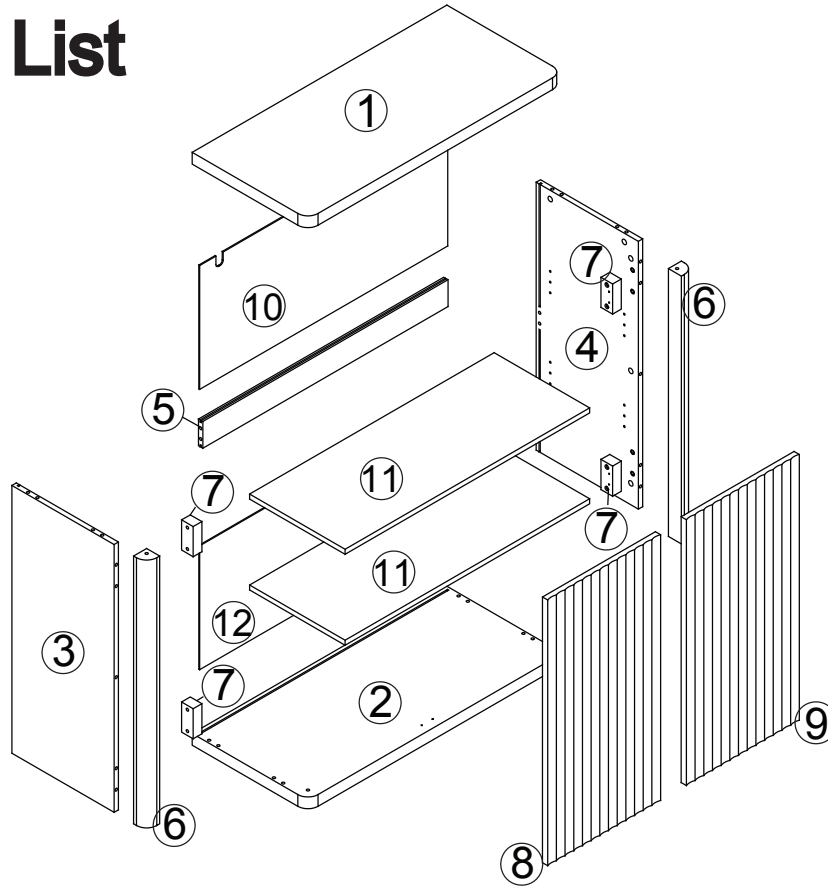













While each screw and nut should be tightened correctly, it is crucial not to over-tighten them. Over-tightening can cause damage to the product or compromise its structural integrity. Use the appropriate amount of force to secure the components without excessive tightening.

If you encounter any questions or problems during the assembly process, please do not hesitate to contact us. We strive to provide excellent customer support and will respond to your inquiries within 24 hours. Our team will offer you a suitable solution to address any concerns you may have.

# Parts List




# Hardware List


AX14  M6x32mm	BX14  Ø15x10mm	CX16  Ø8x30mm	DX4  M7x68mm	EX2 	FX2  M3x13mm	GX8  Ø4x14mm	HX18  Ø3x14mm
IX8 	JX2  Ø4x14mm	KX10 	LX4  M8x(Ø30)x20	MX4 	NX2 	OX2  Ø4x35mm	PX2 
QX1 	RX2  Ø3x16mm	SX8  Ø4x20	TX8  M6x35	UX1  M4			

Code	Description	Quantity
A	M6*32mm Cam bolt	14+2
B	Ø15x10mm Cam lock	14+2
C	Ø8x30mm Wood dowel	16+2
D	M7x68 Broken tail screw	4+2
E	Press the pin	2
F	Self-tapping screw	2
G	Ø4x14 self-tapping screw	8+2
H	Ø3x14 self-tapping screw	18+2
I	Movable Shelf	8+2
J	Ø4x14 self-tapping screw	2+2
K	Backboard clip	10+2


Code	Description	Quantity
L	M8x(Ø30)x20 Adjustable foot	4+1
M	Hinges	4
N	Lock wall accessories	2
O	Ø4x35 self-tapping screw	2
P	Plastic expansion screw	2
Q	Door stop	1
R	Ø3x16 self-tapping screw	2+2
S	Ø4x20 self-tapping screw	8+2
T	M6x35 hexagonal screw	8+2
U	Hexagon socket wrench	1

# Step 1

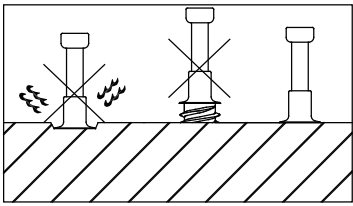


A  x 6


C  x 4

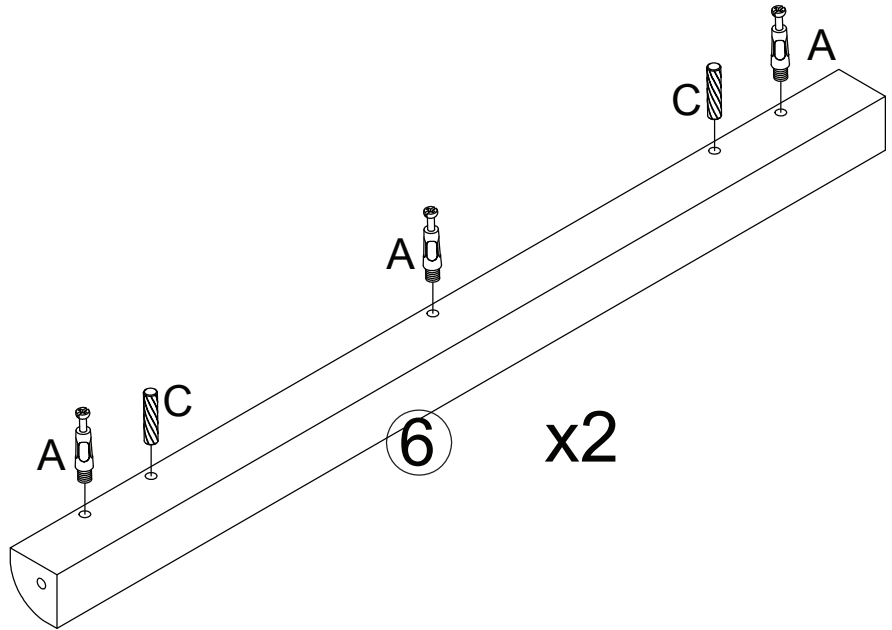

# Step 2

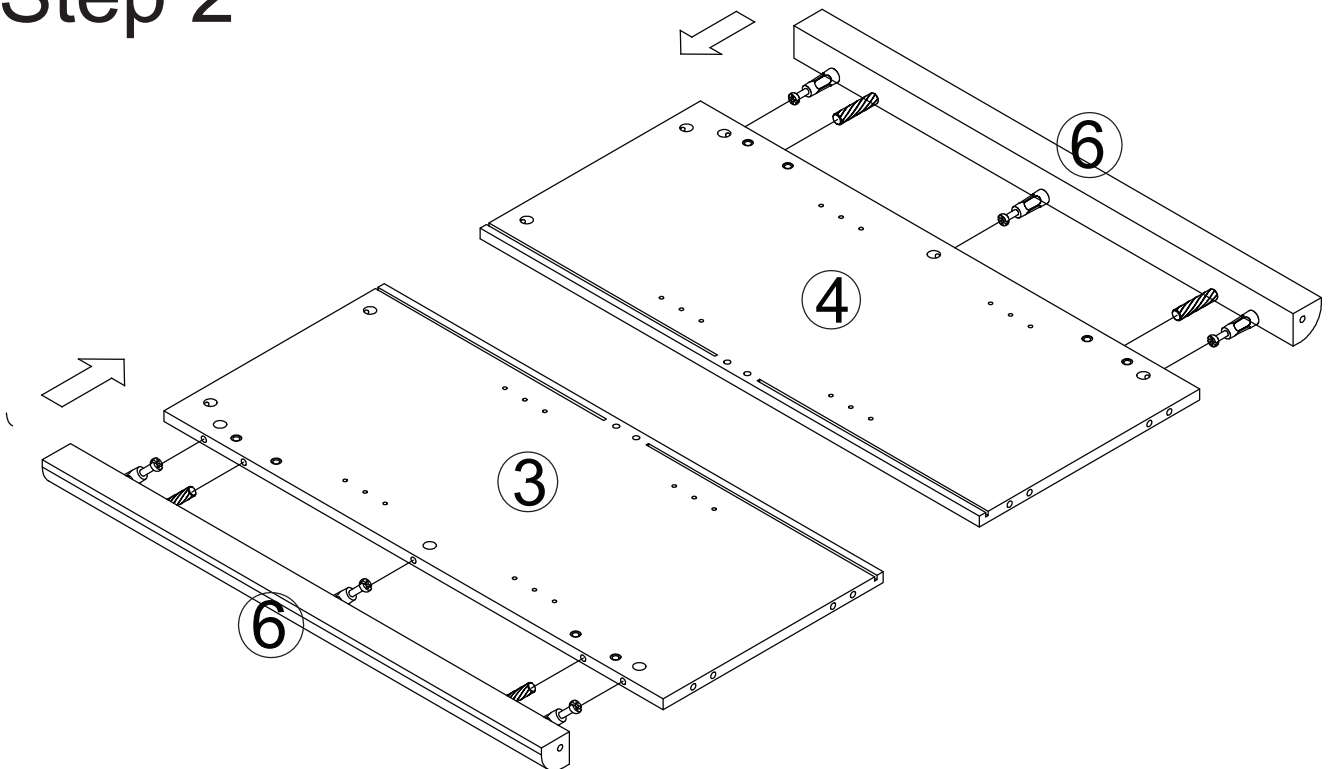


# Step 3

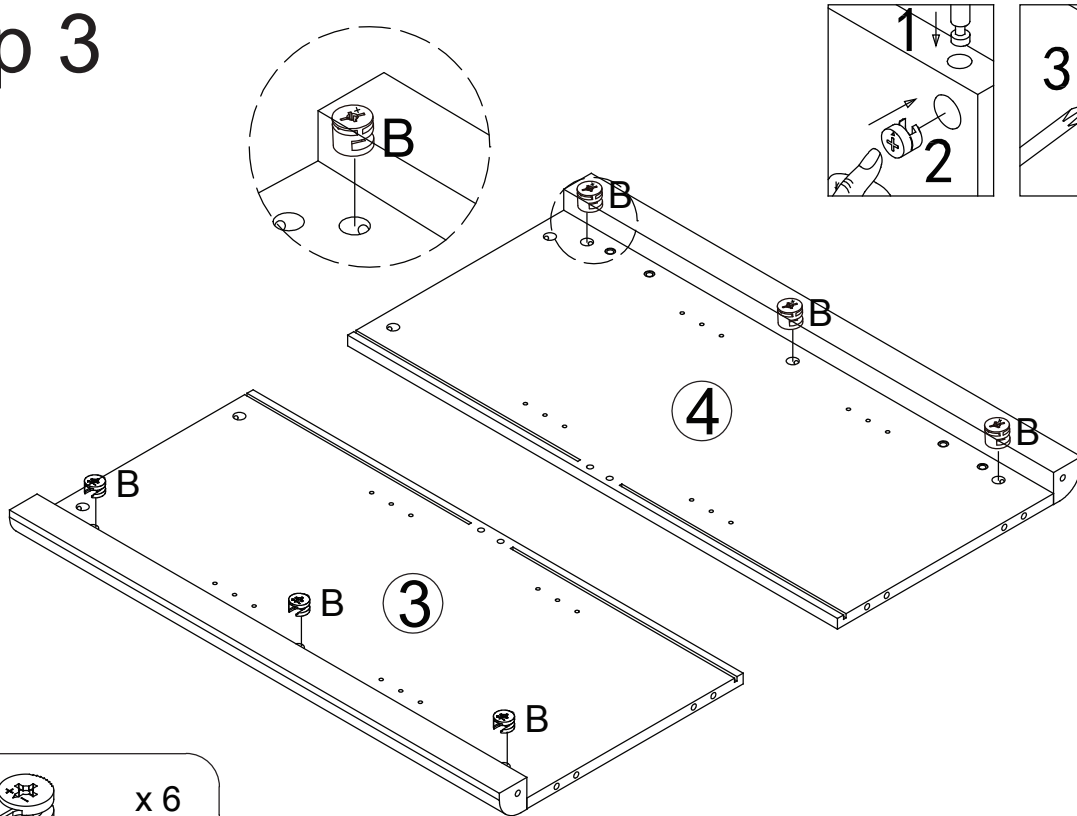


B  x 6

# Step 4

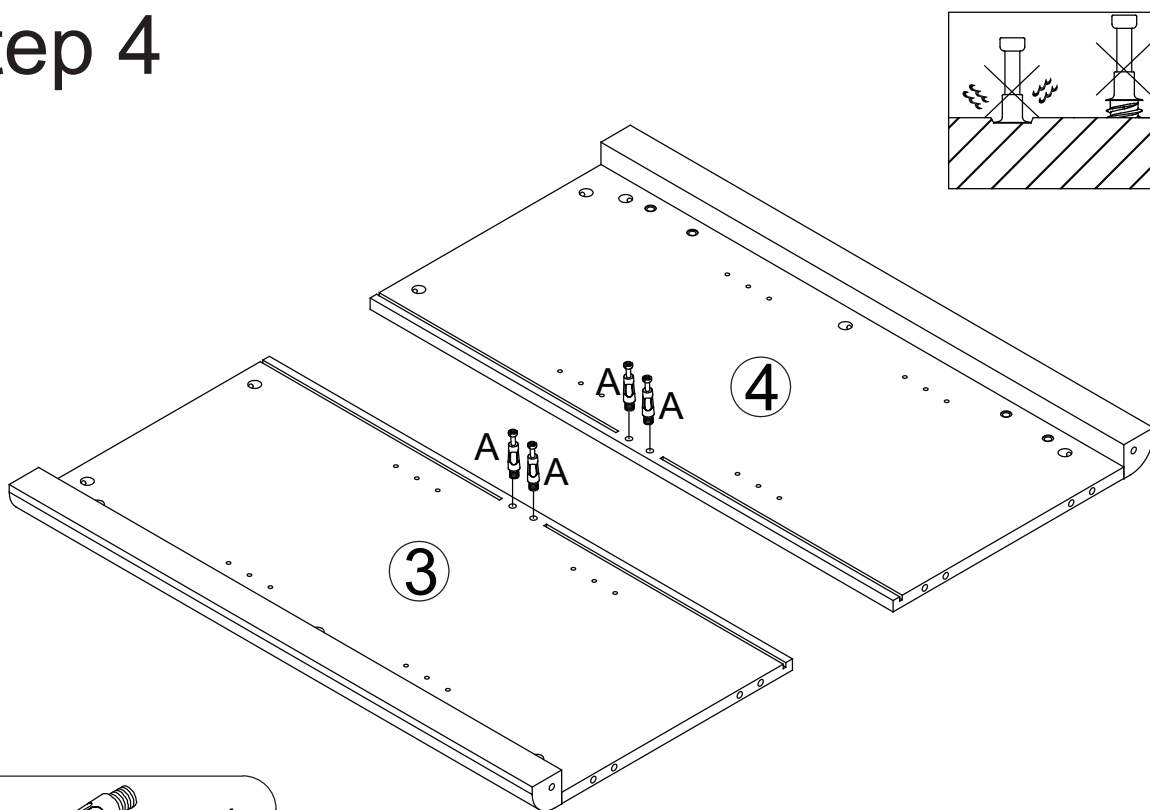



A  x 4

# Step 5

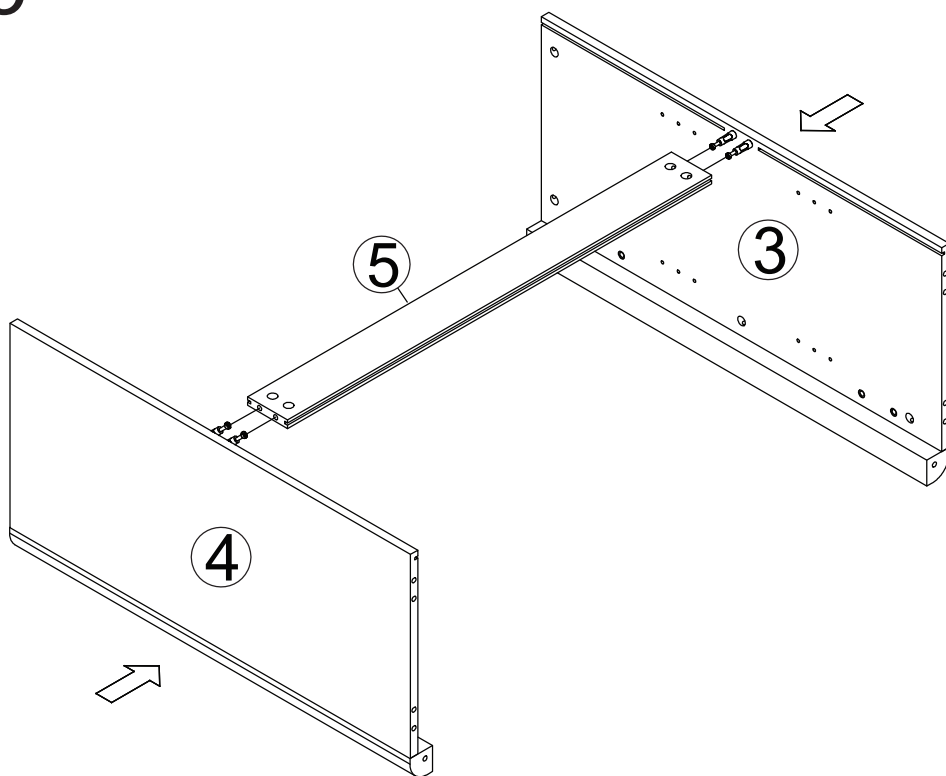



# Step 6

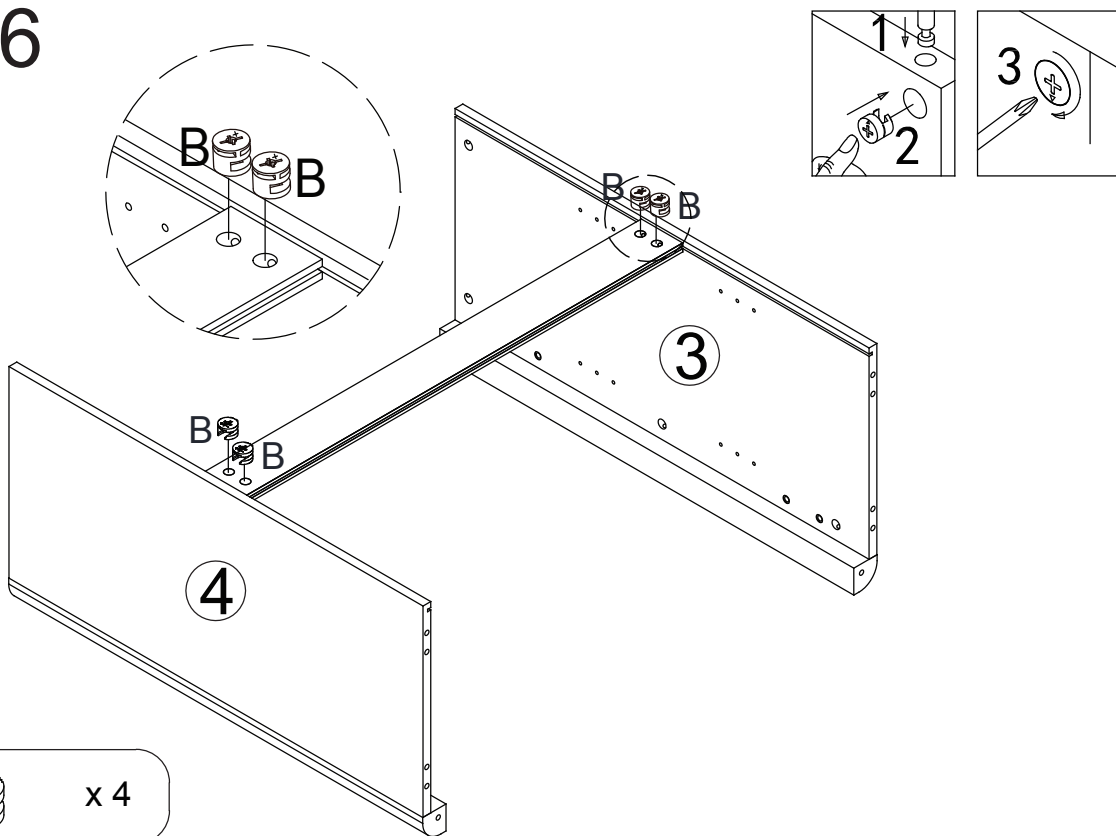

B  x 4


# Step 7

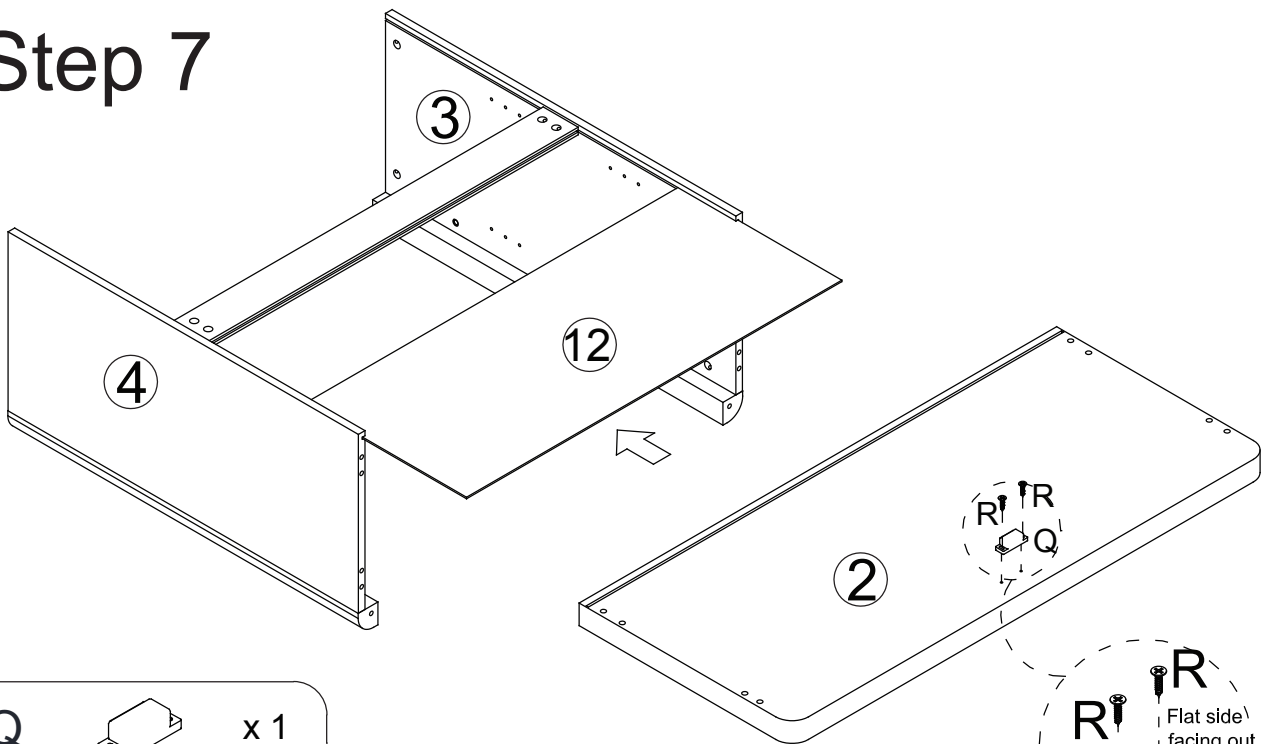


Q  x 1

R  x 2

# Step 8

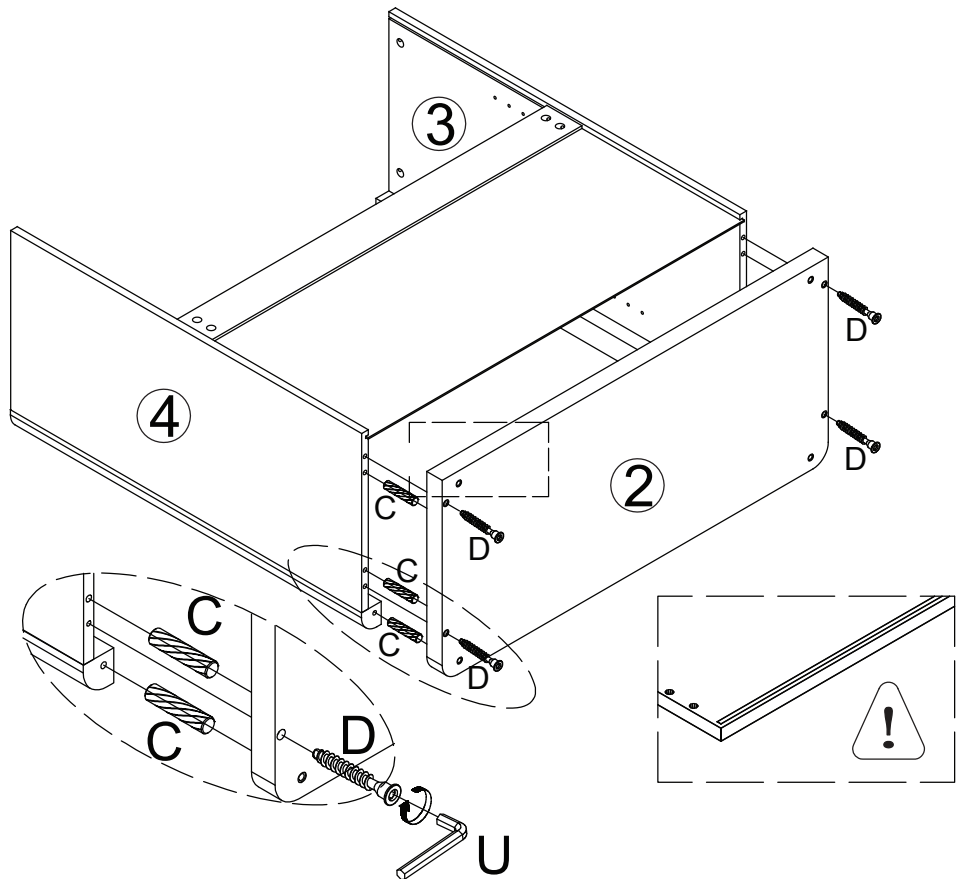


C  x 6

D  x 4

U  x 1

## Step 9


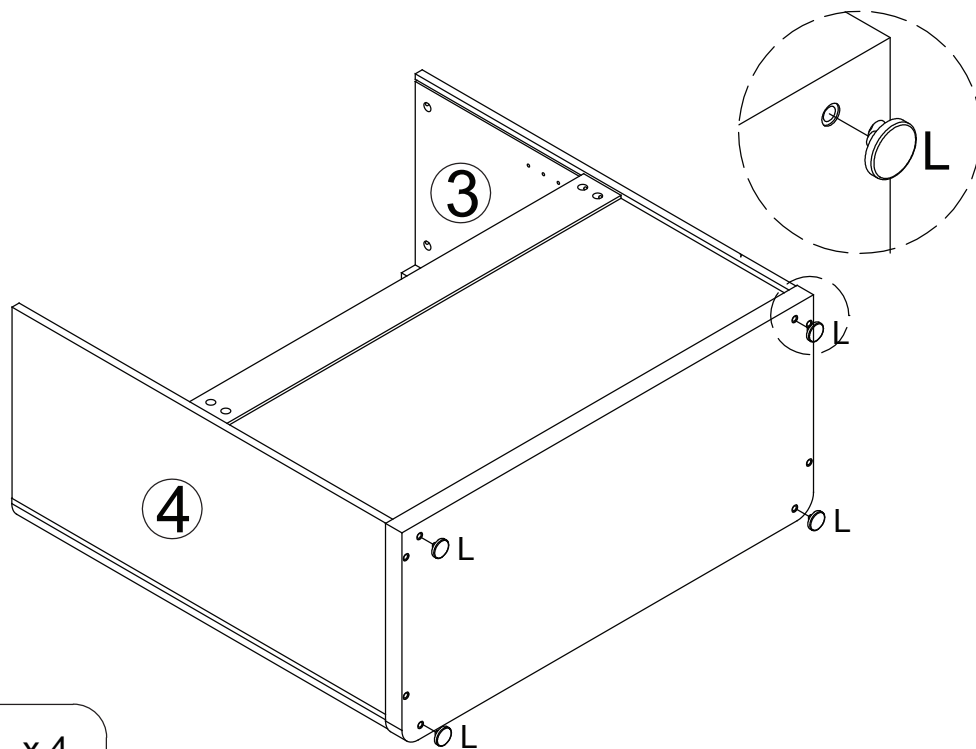


L





x 4

## Step 10

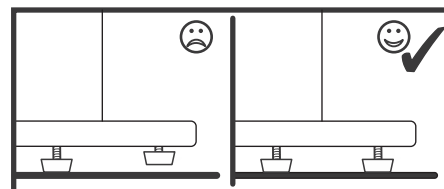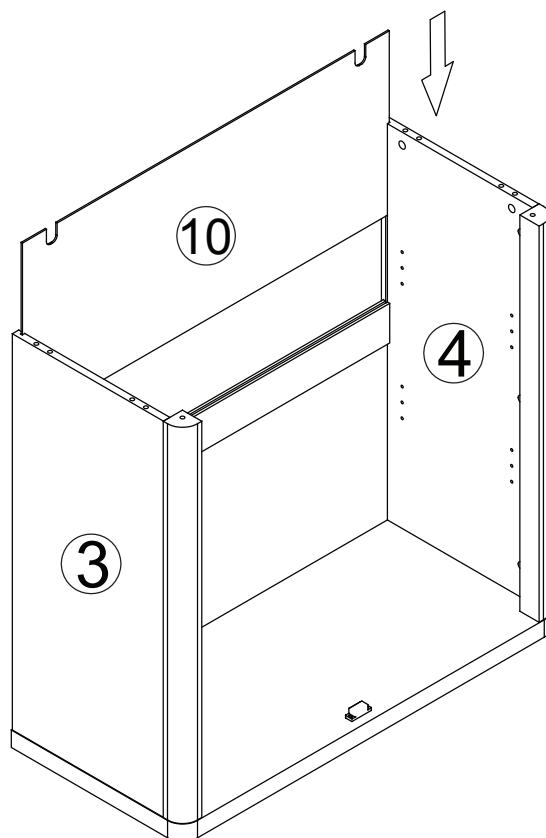



# Step 13

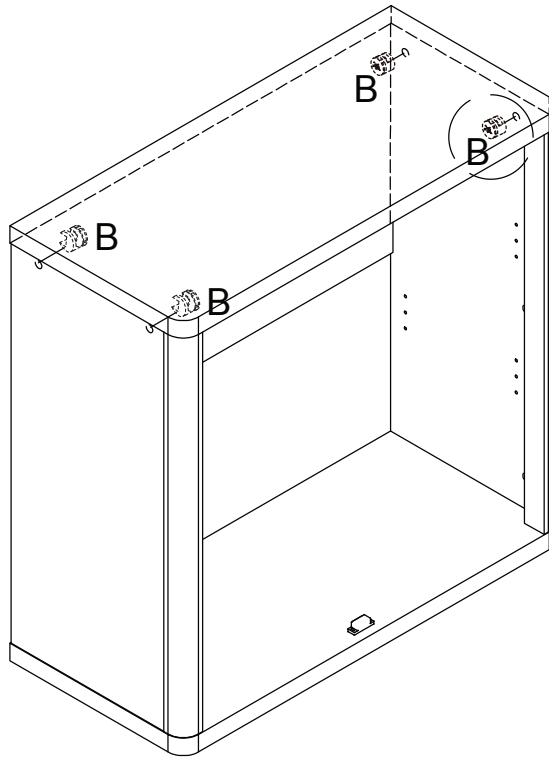


B




x 4

# Step 14

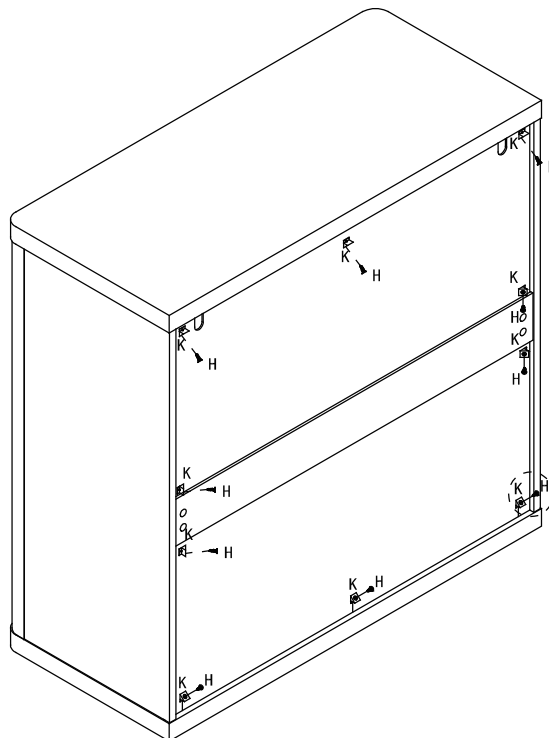

H





x 10

K






x 10


# Step 15

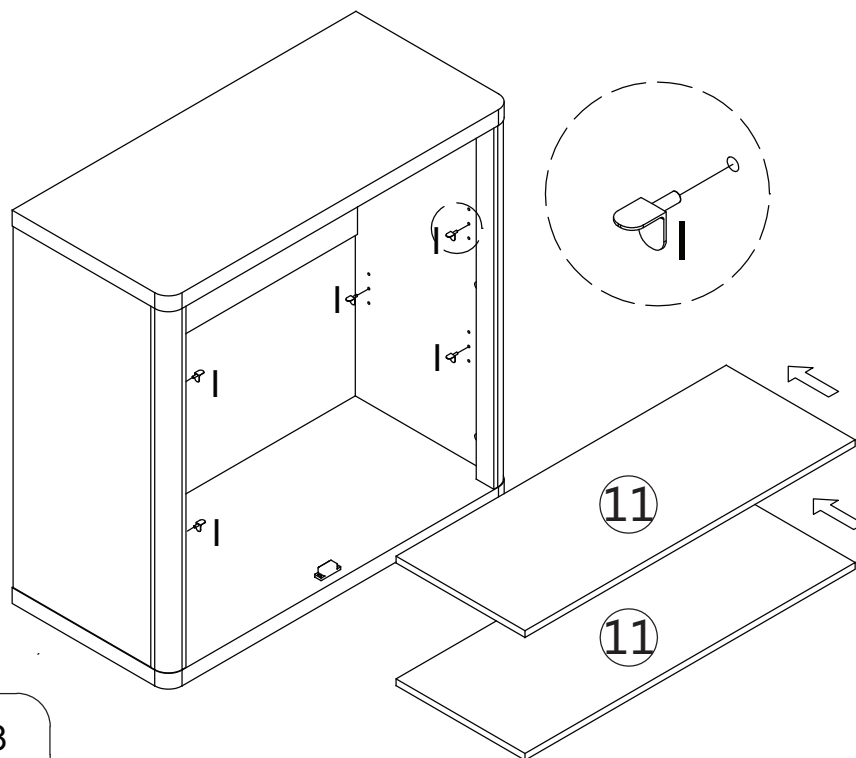




# Step 16

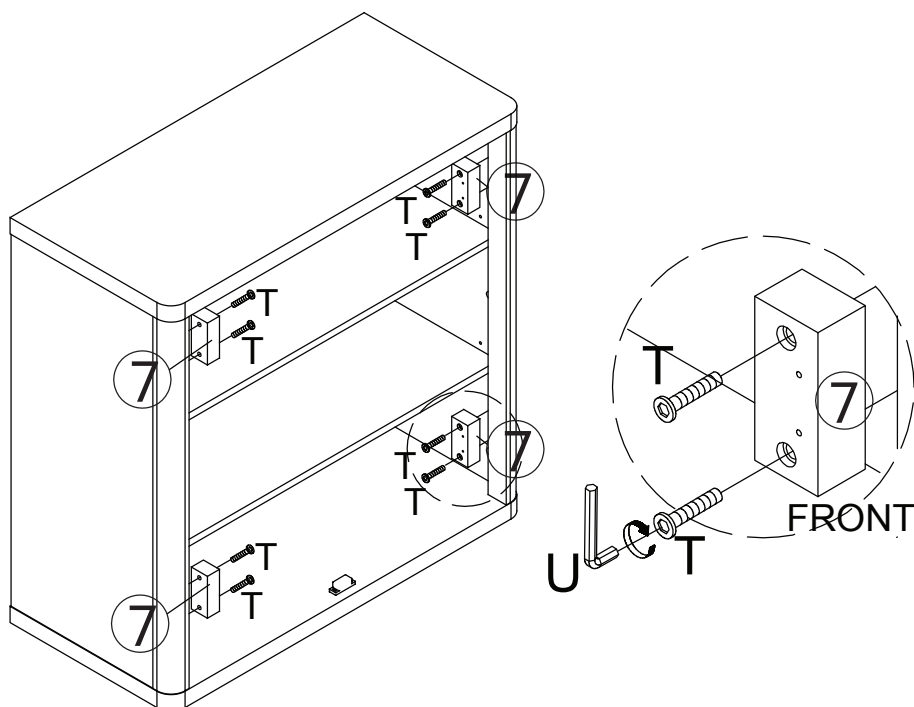



# Step 17

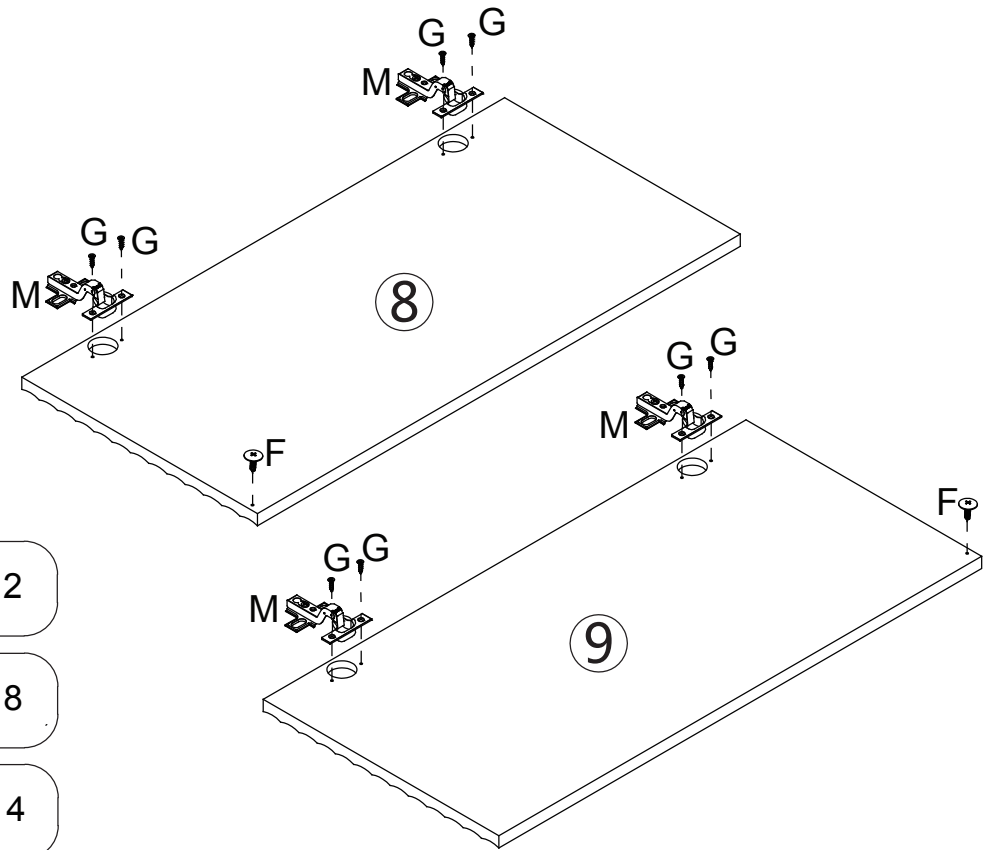

- F  x 2
- G  x 8
- M  x 4

# Step 18



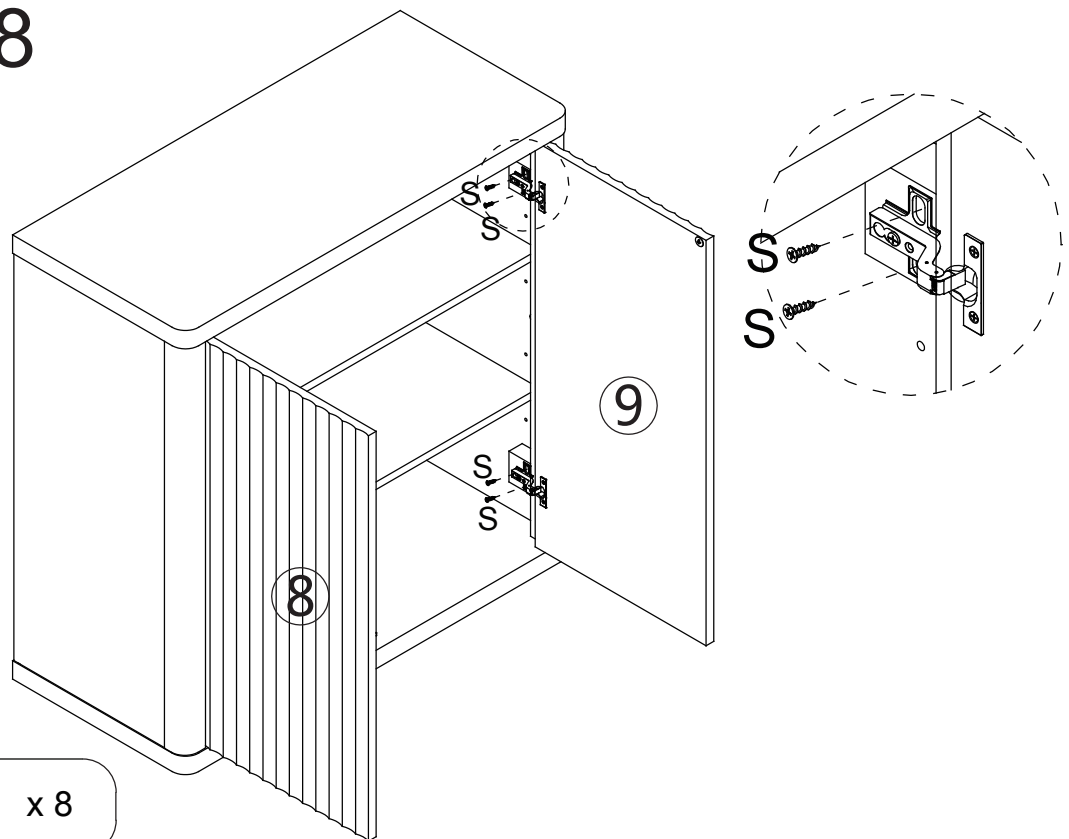


- S  x 8

# Cabinet Door Adjustment Instructions




Height adjustment:

- Locate the height adjustment screws on the hinge.
- Use the Phillips screwdriver to either tighten or loosen the screws to raise or lower the cabinet door as desired.

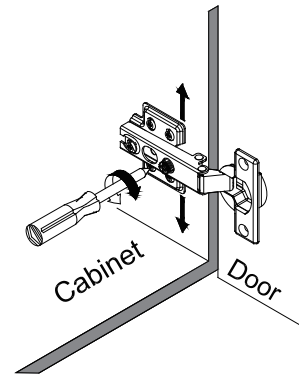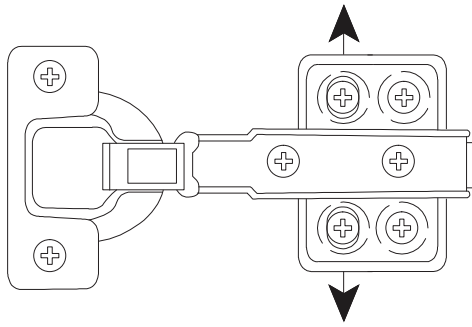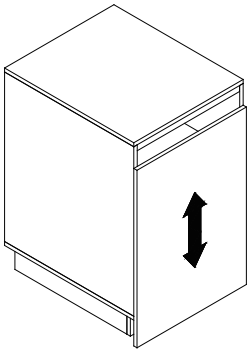




Side-to-side adjustment:

- If the cabinet door needs to be moved closer to or away from the cabinet frame, locate the side-to-side adjustment screws on the hinge.
- Use the Phillips screwdriver to adjust these screws and gradually move the door in the desired direction.



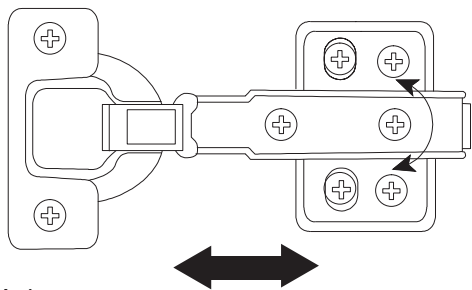



Depth adjustment (if applicable):


- Check if the cabinet door needs to be brought closer to or further away from the cabinet frame.
- For-depth adjustment, locate the depth adjustment screws on the hinge.
- Use the Phillips screwdriver to turn these screws clockwise or counterclockwise accordingly.

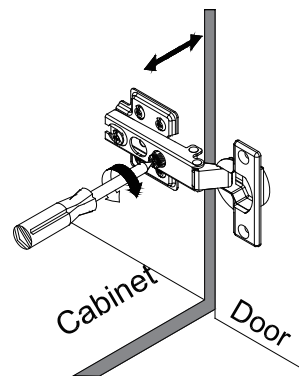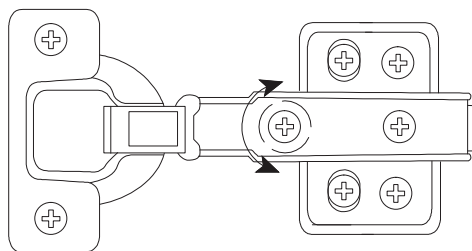

# Step 19

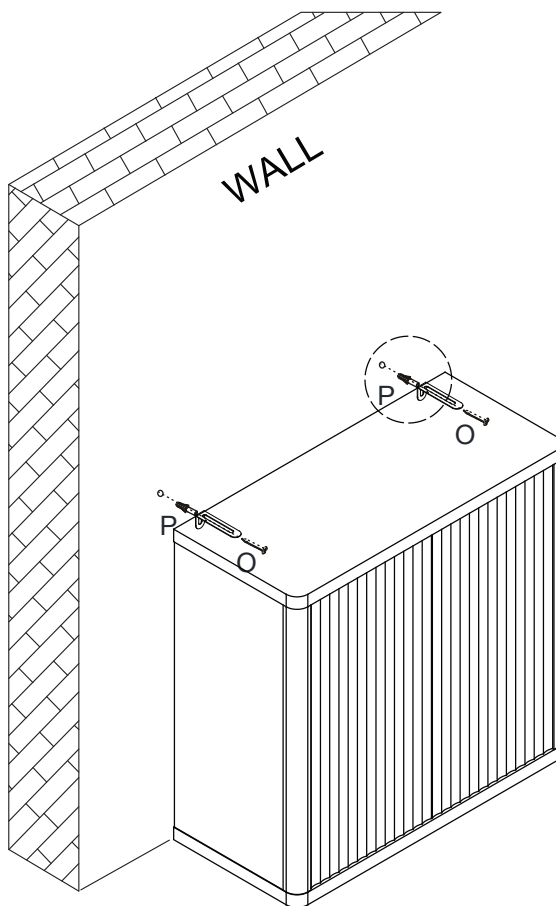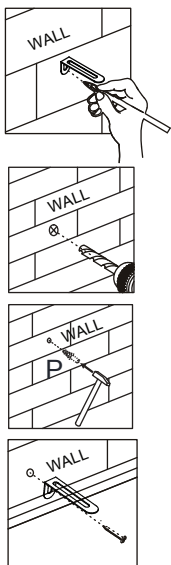

O



x 2

P



x 2

# Step 20

