











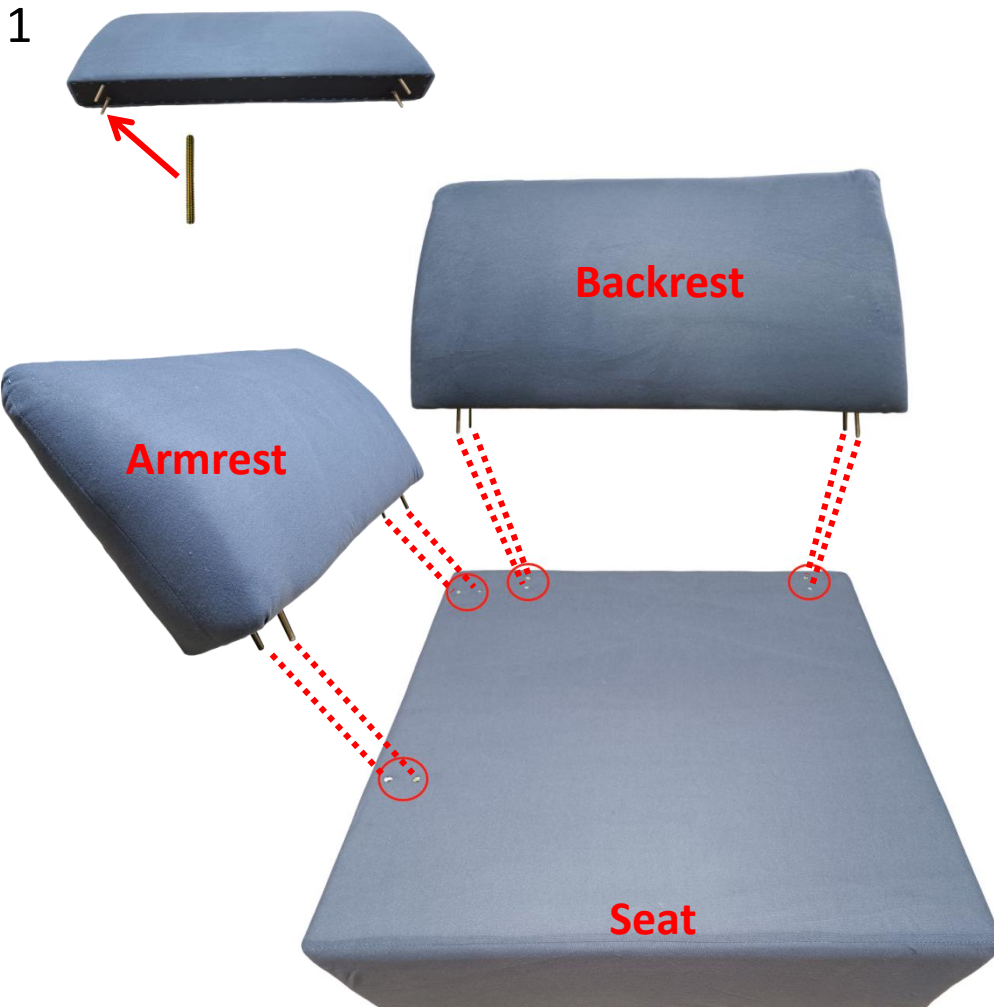


Installation

To avoid scratches and swallowing parts, please do not install by children!


Hardware List		Hardware List	
	Seat		Backrest
	Armrest		Seat cushion
	Back cushion		Armrest cushion
	Nuts, Washers, long screws		Legs
	Sofa cover		Base fabric
	Buckle		Screw



First, screw the long screws into the holes reserved for backrest and armrest about 1/3 of the depth, then insert them to the holes on the seat.




2

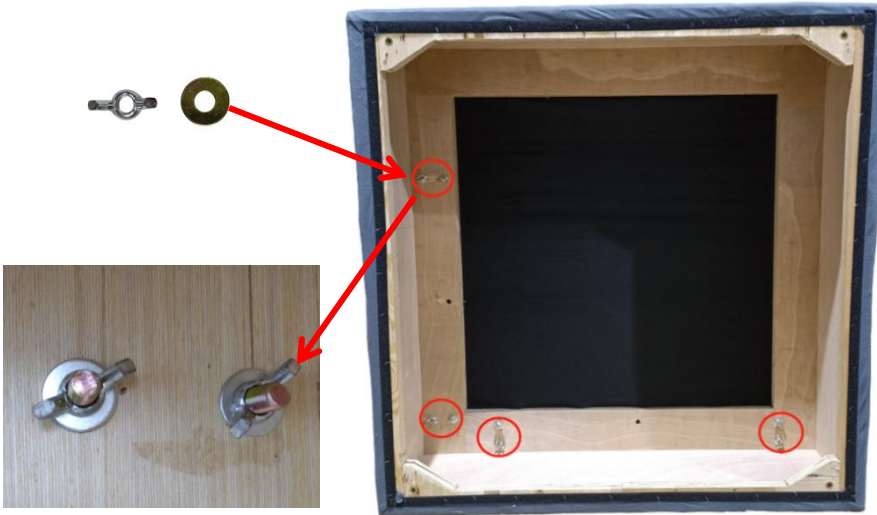

Tighten with nuts from the bottom (please tighten each nut repeatedly to insure firmness).

3

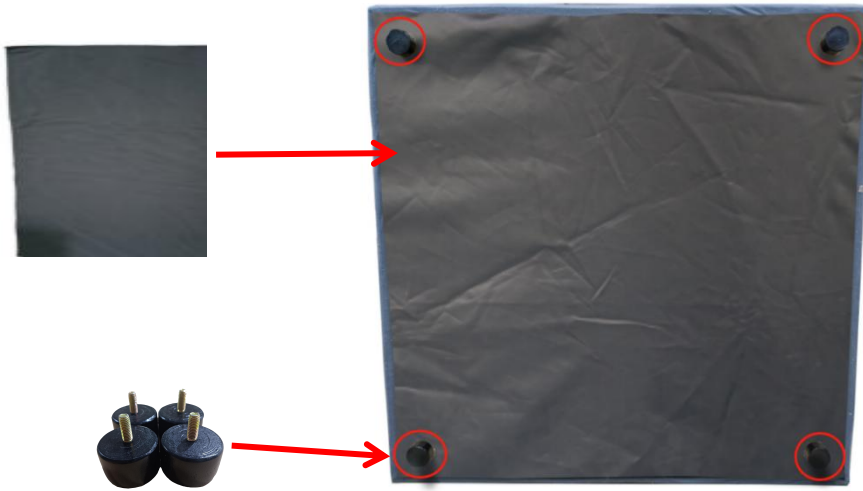

Seal the bottom with the base cloth. And then Screw the sofa Legs into the reserving holes on the seat.


4

Put on the sofa cover.





5

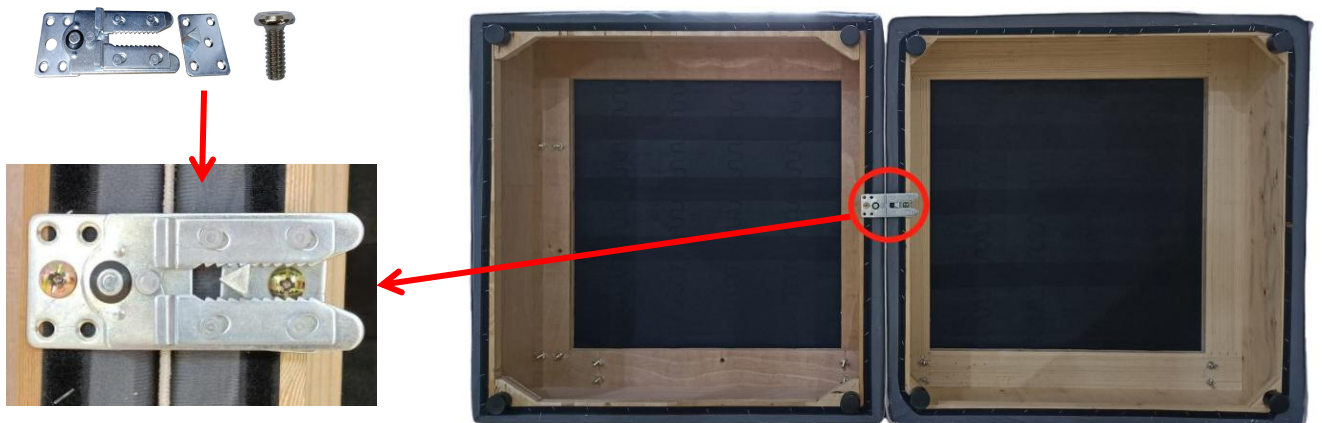Apply the connection buckles to connect the seats together (or not, it's totally up to users).




Installation

To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
 Seat	1	 Backrest	1
 Armrest	1	 Seat cushion	1
 Back cushion	1	 Armrest cushion	1
 Sofa cover	1	 Base fabric	1
 Nuts, Washers, long screws	8	 Legs	4

1

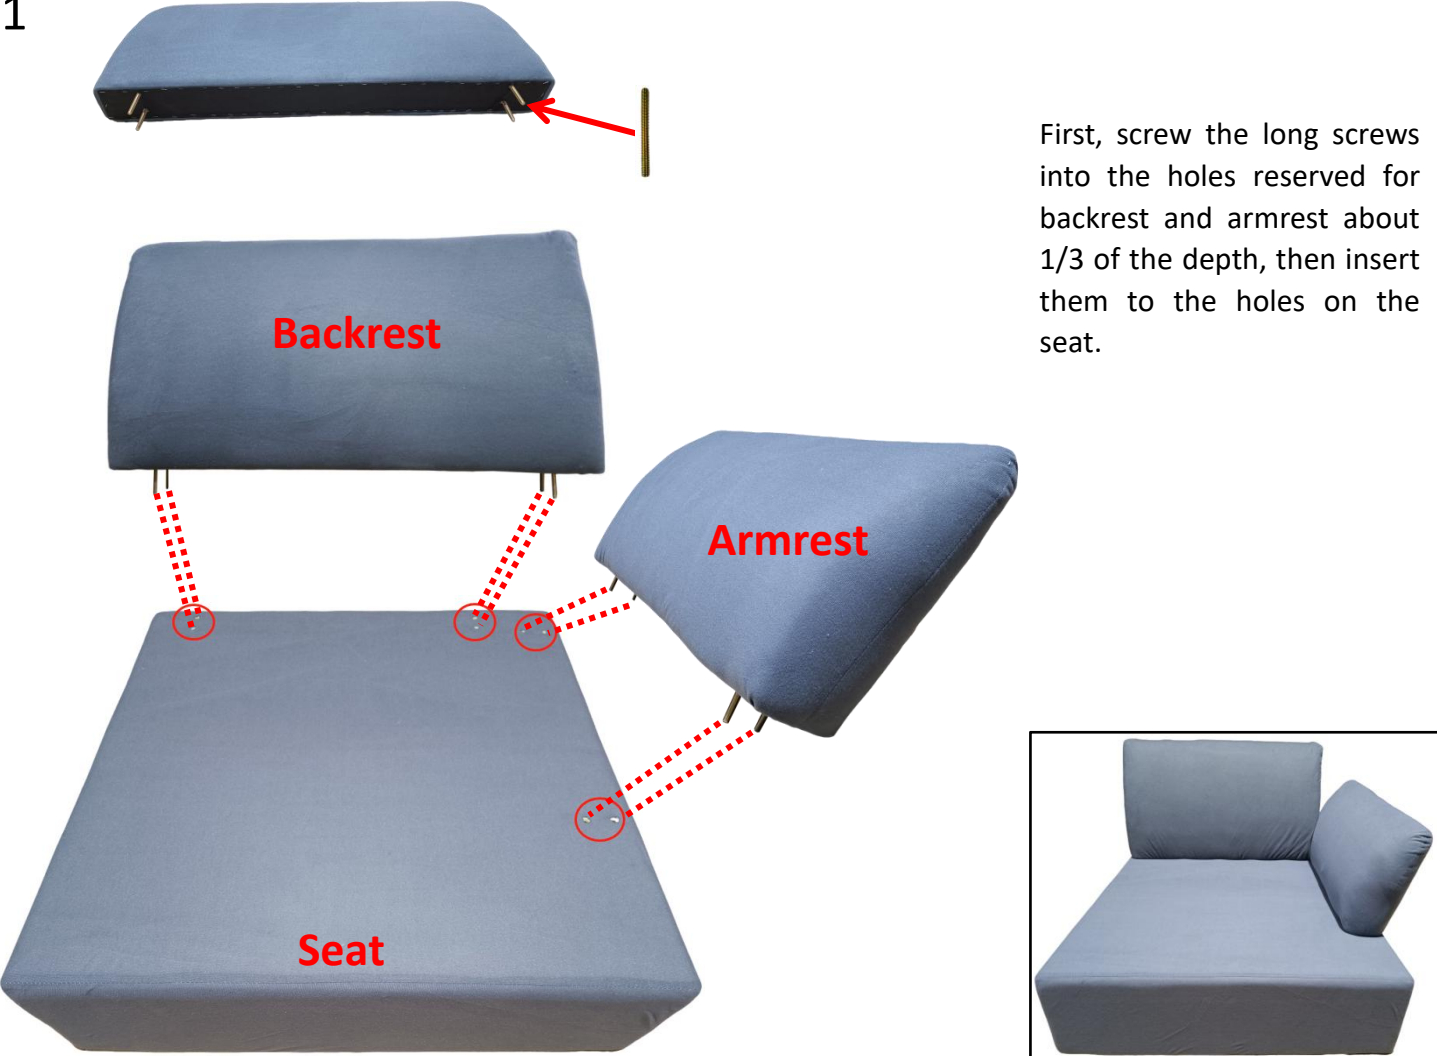


First, screw the long screws into the holes reserved for backrest and armrest about 1/3 of the depth, then insert them to the holes on the seat.

2



Tighten with nuts from the bottom (please tighten each nut repeatedly to insure firmness).

3

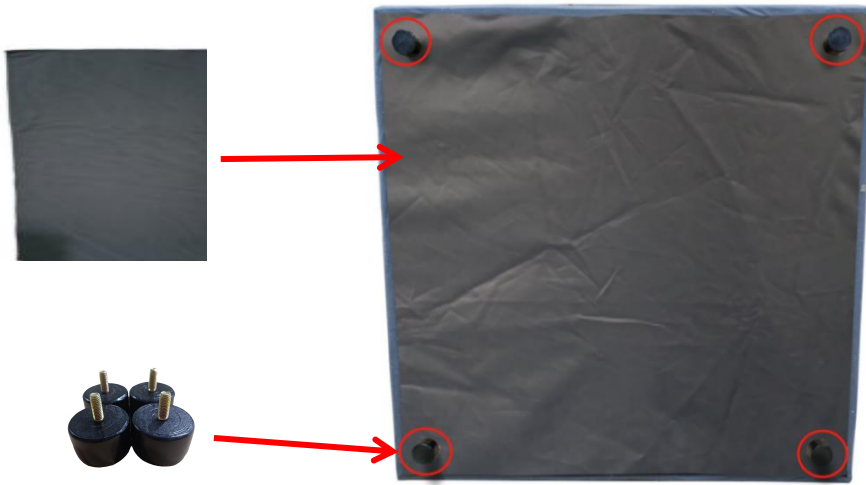

Seal the bottom with the base cloth. And then Screw the sofa Legs into the reserving holes on the seat.


4

Put on the sofa cover.



5

Apply the connection buckles to connect the seats together (or not, it's totally up to users).

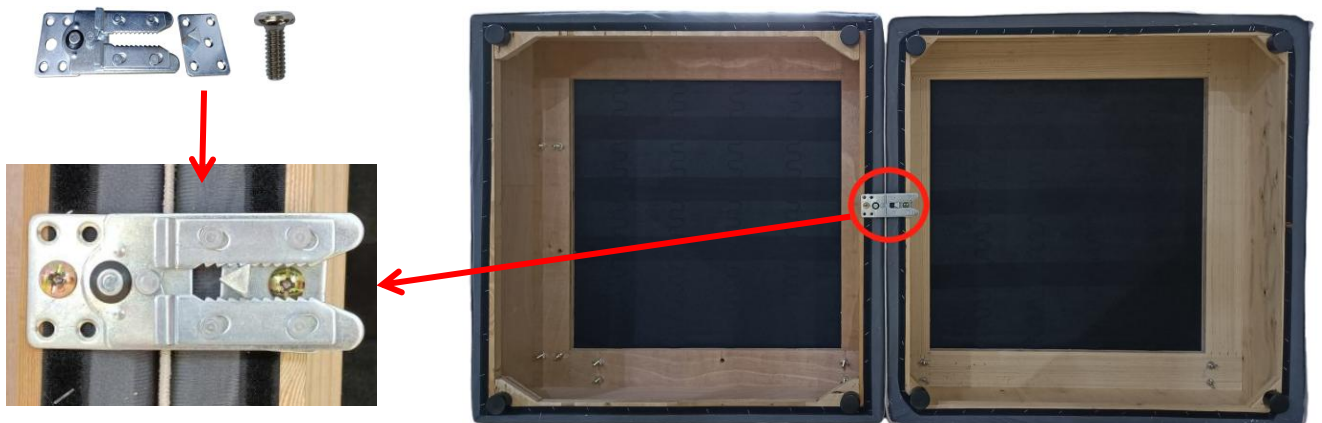


Installation

To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	Seat		Backrest
	Seat cushion		Back cushion
	Sofa cover		Base fabric
	Nuts, Washers, long screws		Legs
	Buckle		Screw


1

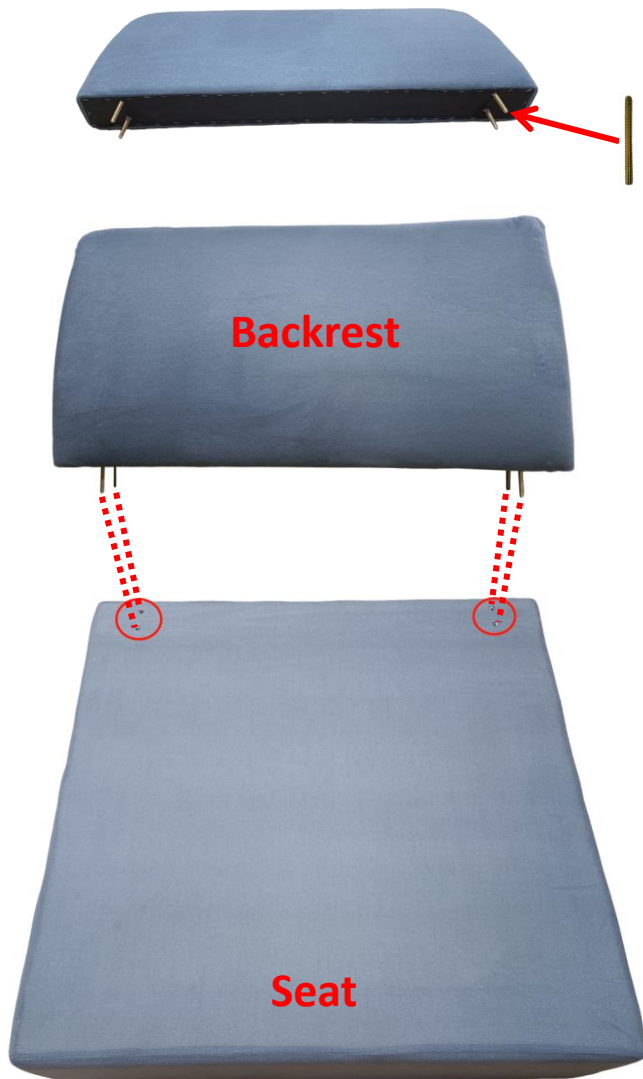

First, screw the long screws into the holes reserved for backrest about 1/3 of the depth, then insert them to the holes on the seat.




2

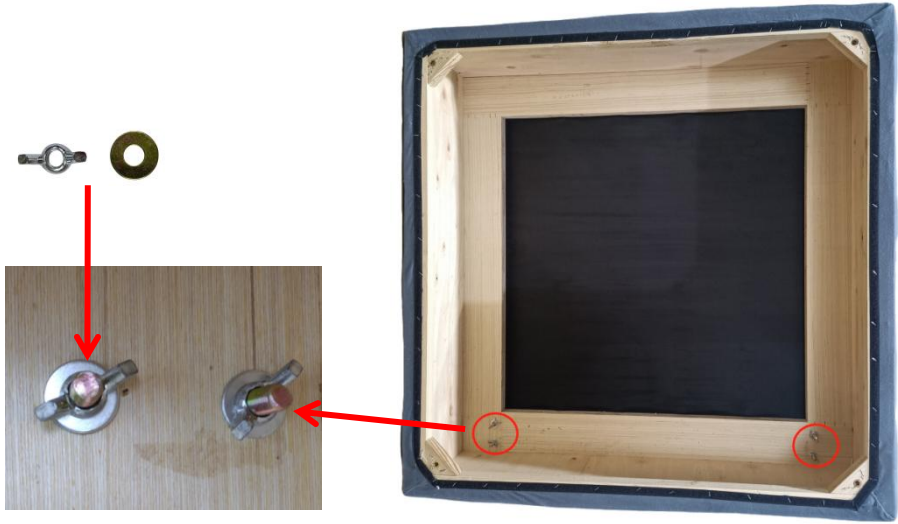

Tighten with nuts from the bottom (please tighten each nut repeatedly to insure firmness).


3

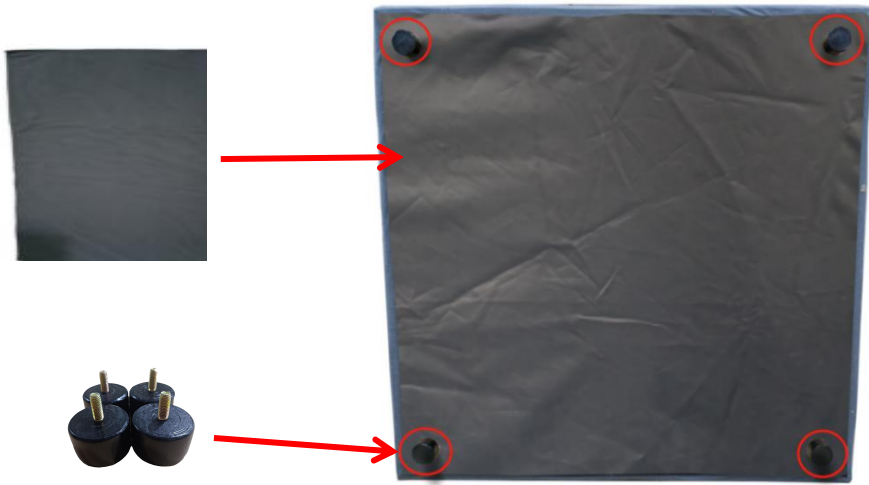

Seal the bottom with the base cloth. And then Screw the sofa Legs into the reserving holes on the seat.

4

Put on the sofa cover.

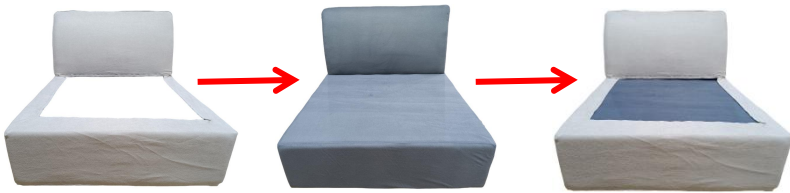

5

Apply the connection buckles to connect the seats together (or not, it's totally up to users).

