


# Grab Bars

## 6300 Series

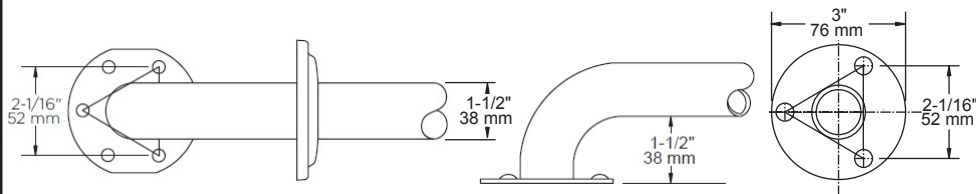

### MATERIALS:

6300 (1-1/2" O.D.) tubing is (19 gauge) type 304 stainless steel with #4 satin finish. Wall Flanges are (14 gauge) type 304 stainless steel. Wall Flanges are heliarc welded to tubing.

SERIES NO.	18" (457 mm)	24" (609 mm)	30" (762 mm)	36" (914 mm)	42" (1066 mm)	48" (1219 mm)
6300	6318	6324	6330	6336	6342	6348

Dimensions shown are flange center to center on straight bars and center flange to center bar on angle bars.

### INSTALLATION:

Install grab bar with 3 - #10 x 2-1/2" oval head stainless steel screws provided for each end wall flange and 2 - #10 x 2-1/2" oval head stainless steel screws provided for each center flange.

### OPTIONAL FASTENER INFORMATION:

Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following fasteners are suggested:  
Tile/Masonry - Plastic or Lead Anchors, Plaster/Drywall - Toggle Bolts.

Note: 6300 series grab bars are engineered to meet 1000 lb. pull when properly installed. 6300 series meet ADA, and ANSI (A117.1-2003) for form and load bearing requirements.

### SPECIFICATION:

Surface mounted grab bar shall be model \_\_\_\_\_  
(fill in model number) by Liberty Hardware® Manufacturing Corporation.