






Installation & Assembly

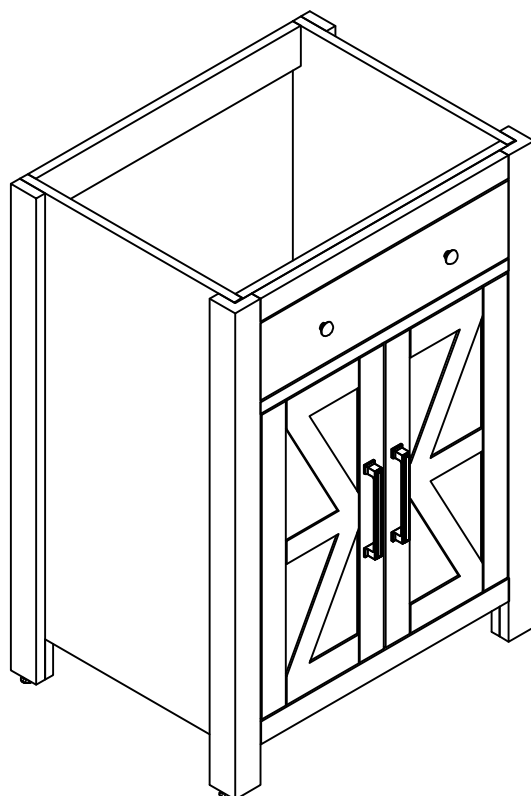


YOU MAY NEED (NOT SUPPLY)

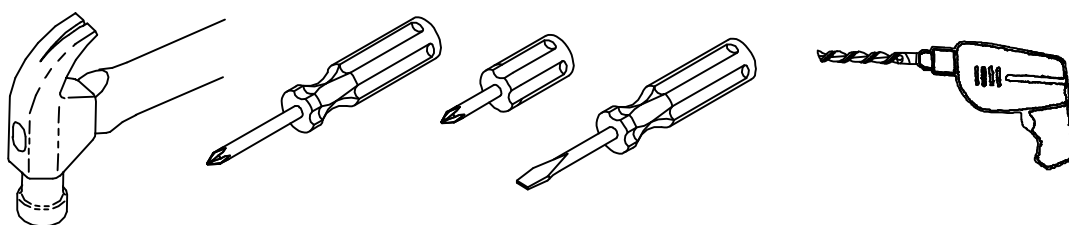


ASSEMBLY DIAGRAM

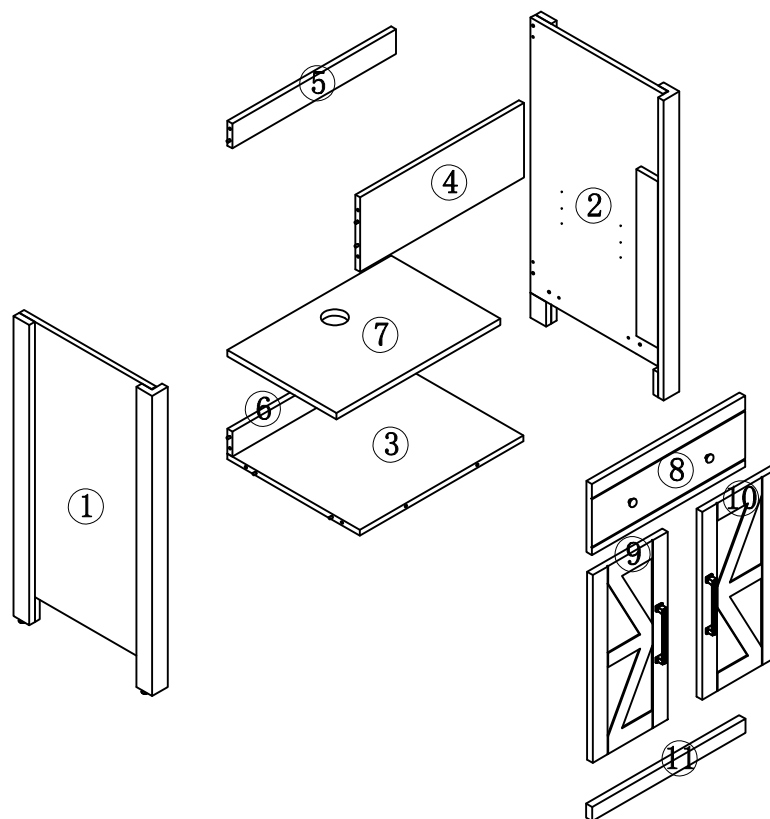


PARTS LIST					
PARTS LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
①	Left side panel 	1	⑦	Movable Shelf 	1
②	Right side panel 	1	⑧	Top Decorative Panel 	1
③	Bottom panel 	1	⑨	Left door panel 	1
④	Front fixed panel 	1	⑩	Right door panel 	1
⑤	Back fixed panel 	1	⑪	Bottom Decorative Panel 	1
⑥	Back fixed panel 	1			

PARTS LIST					
HARDWARE LIST					
NO	DESCRIPTION	QTY	NO	DESCRIPTION	QTY
A	Three-in-one eccentric wheel 	14	H	4*30mm screw 	2
B	Three-in-one connecting rod 	14	I	4*23mm screw 	6
C	Three-in-one sticker 	14	J	Door handle 	2
D	8*40mm wood dowel pins 	12	K	Door handle 	2
E	Two-in-one lock handle 	4	L	Small adjustable foot 	4
F	Two-in-one screws 	4	M	Door hinges 	4
G	4*16mm screw 	24	N	Pipe Plug 	1
CAUTION: Please confirm the parts list before installation					


STEP 1

HARDWARE LIST			
Three-in-one connecting rod B  14PCS	Small adjustable foot L  4PCS	Two-in-one screws F  4PCS	

1. Put the three-in-one connecting rod in the 10mm hole of the following panels and tighten them with a cross screwdriver or an electric tool.




2. Fix the small adjustable feet on the bottom of the left and right side panels

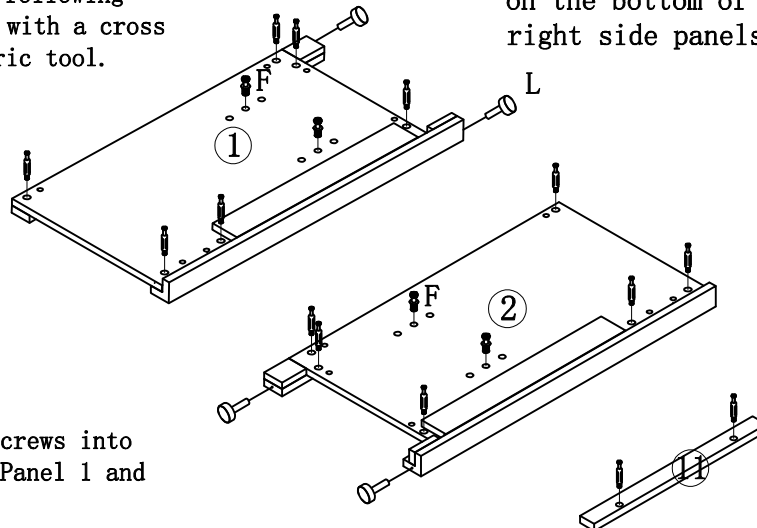

3. Insert the two-in-one screws into the pre-drilled holes of Panel 1 and Panel 2.



STEP 2

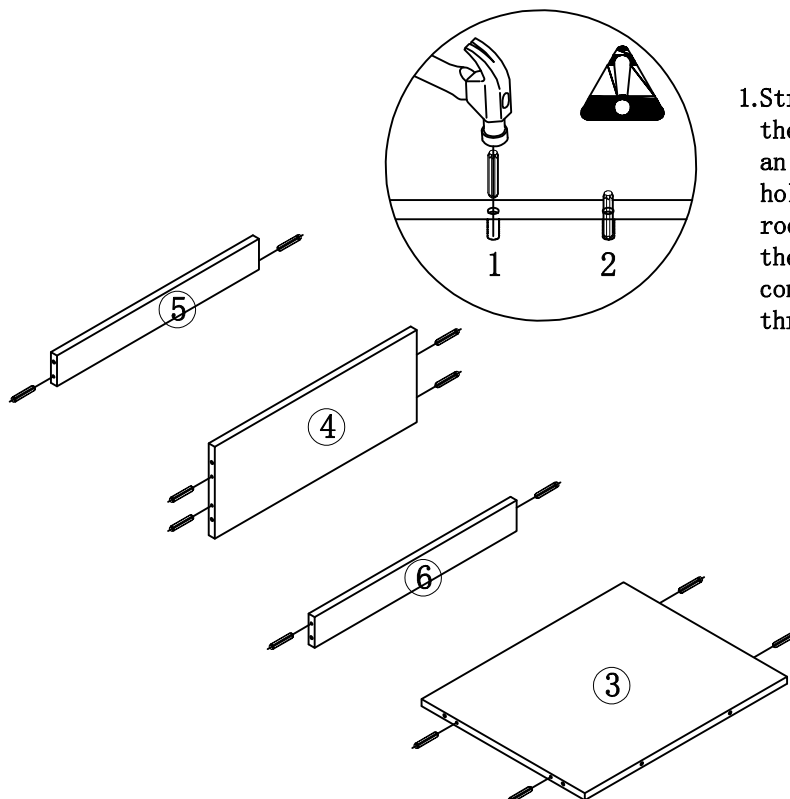


1. Strike the 08*40mm wood dowel pin into the 8mm hole of the above panels with an iron hammer. Please note that the hole of the three-in-one connecting rod should also be 8mm. The hole of the three-in-one connecting rod connects to the hole of 15mm three-in-one eccentric wheel.

HARDWARE LIST	
8*40mm wood dowel pins D  12PCS	

STEP 3

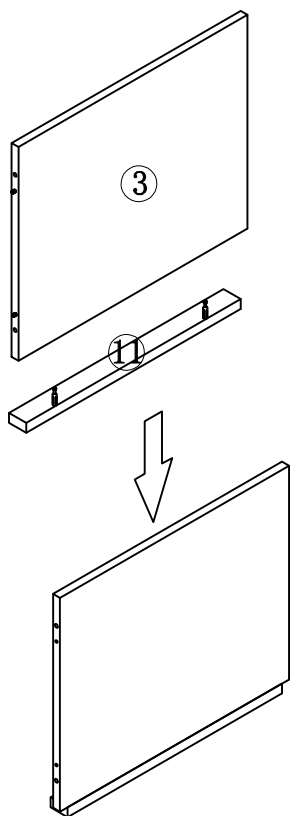

1. Connect No. 3 panel to No. 11 panel tightly with the three-in-one eccentric wheel.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  2PCS


Three-in-one
sticker
C  2PCS



STEP 4

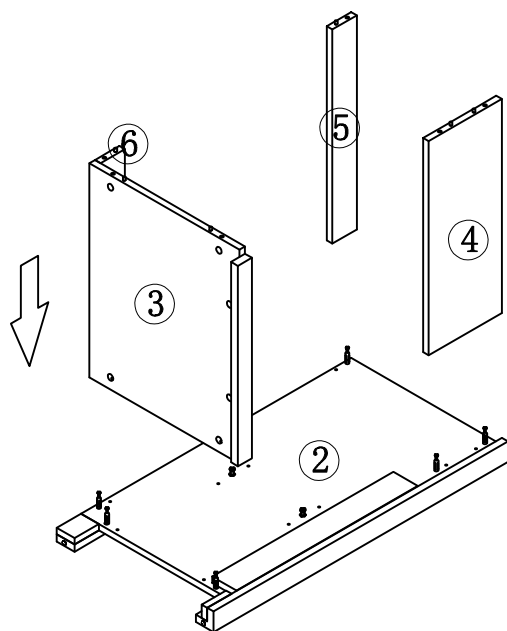

1. Connect No. 3-4-5-6 panel to No. 2 panel tightly with the three-in-one eccentric wheel.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  6PCS


Three-in-one
sticker
C  6PCS



STEP 5

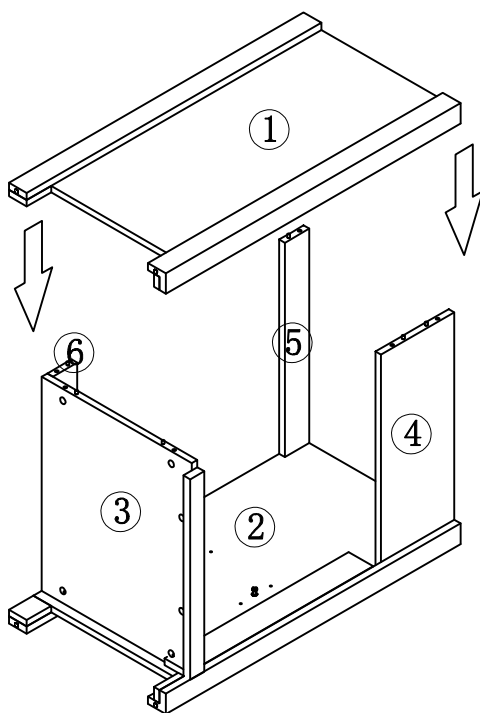

1. Connect No. 1 panel to No. 3-4-5-6 panel tightly with the three-in-one eccentric wheel.



2. Cover the mounting hole of the eccentric wheel with a three-in-one sticker.



HARDWARE LIST

Three-in-one
eccentric wheel
A  6PCS

Three-in-one
sticker
C  6PCS



STEP 6

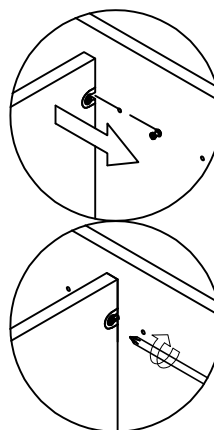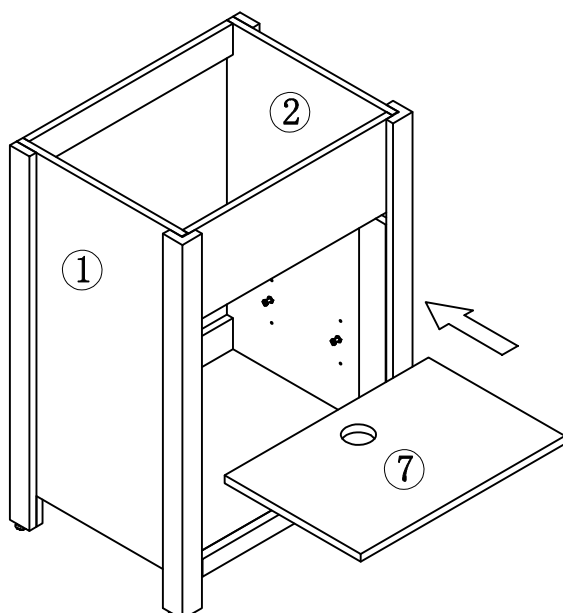

Fix the two-in-one lock handle on No. 7 plate and put it in the cabinet. Put the pipe plug on No. 7 plate


HARDWARE LIST

Two-in-one lock
handle
E  4PCS


Pipe Plug
N  1PCS




STEP 7




1:Secure the handle (J) to the 8# false drawer front with 4×23mm screws.

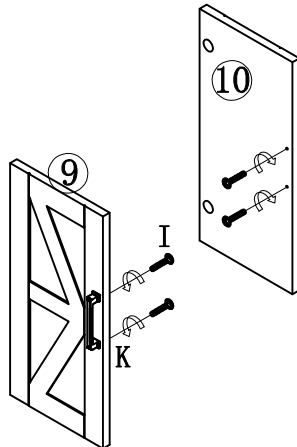


2:Fix the handles(K) on Panel 9 and Panel 10 with 4×23 screws.

HARDWARE LIST			
Door handle J  2PCS	Door handle K  2PCS	4*23mm screw I  6PCS	



STEP 8

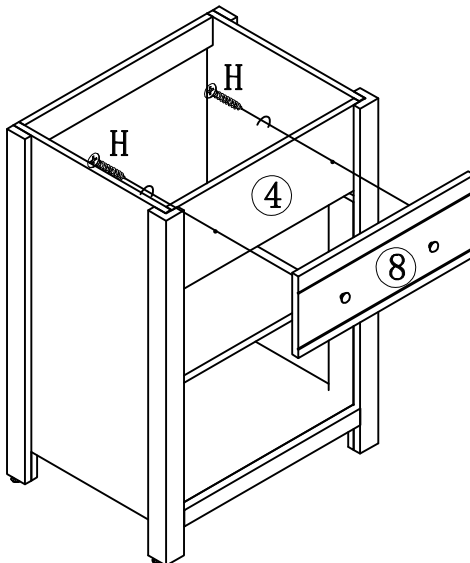


Fasten Panel 8 and Panel 4 with 4*30mm screws.

HARDWARE LIST	
4*30mm screw H  2PCS	


STEP 9

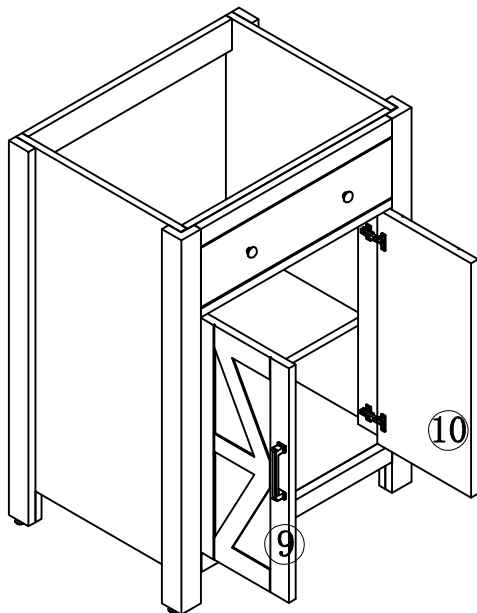



1. Install the hinge cup to the door panel with 4*16mm screws.



2. Install the hinge to the side panel with 4*16mm screws.



4. Adjust the door panel clearance.



3. Install the hinge cup on the door panel to the hinge of the side panel.

HARDWARE LIST

4*16mm screw

Door hinge

G  24PCS


M  4PCS




Hinge/Door Adjustment and Realignment

If adjustment or realignment is needed, follow the instructions provided in the following chart.


Vertical adjustment




1. Loosen screws







2. Adjust hinge







3. Tighten screws



Horizontal adjustment



Door gap adjustment





Choking hazard-Small Parts : This unit contains small parts, not for children under 3 years.

Tip-over hazard : Secure finished unit to wall stud using L-Bracket and wall screw (#10*1.5"W/out provided). If a wall stud is not neccessible , Consault your local hardware store for appropriate mounting hardware . Failure to properly install will result in product collapse or tip-over. Serious injury can occur .