
Installation

To avoid scratches and swallowing parts， please do not install by children!

Hardware List		Hardware List	
 Seat	1	 Long backrest	1
 Short armrest	1	 Seat cushion	1
 Back cushion	1	 Pillow	2
 Sofa cover	1	 Base cloth	1
 Inserted rod	4	 Legs	4
 Cover plate	1	 Connecting buckle x1 8x20mm screws x2	


1 Cover the hole with a cover plate.

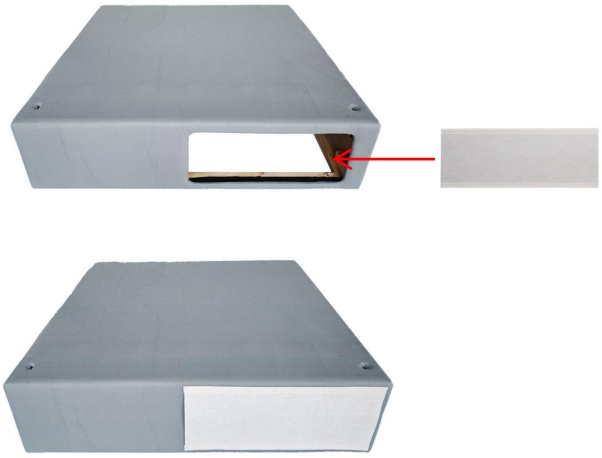


2 Seal the bottom with the base cloth.And then screw the sofa Legs into the reserving holes on the seat.



3 As shown in the figure: Insert the rod into the corresponding positions of the backrest and armrest.

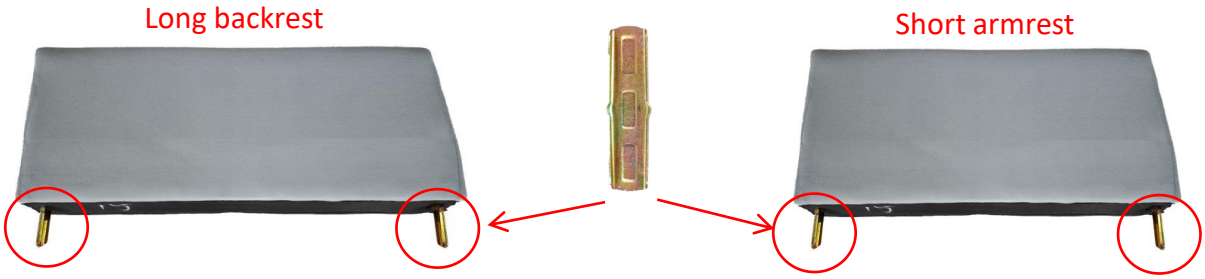

4

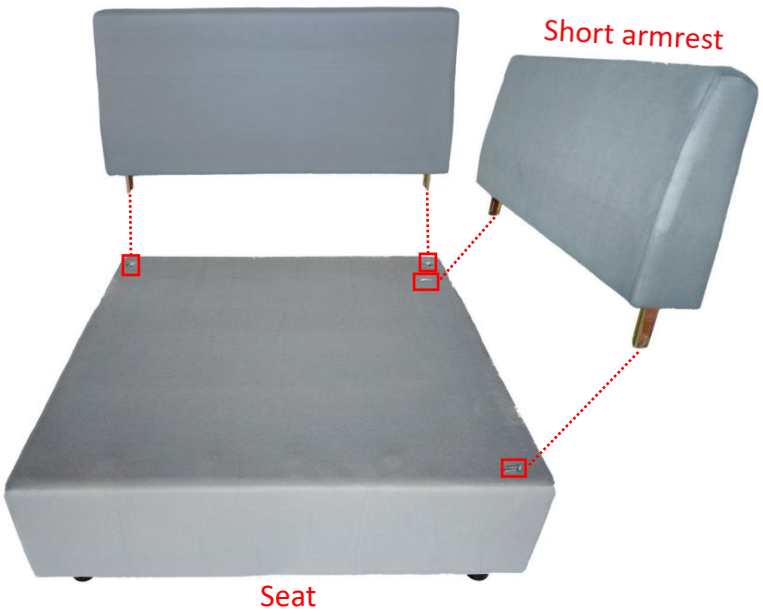


Please note that you need to install the backrest first. Insert the backrest first.




5 Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.

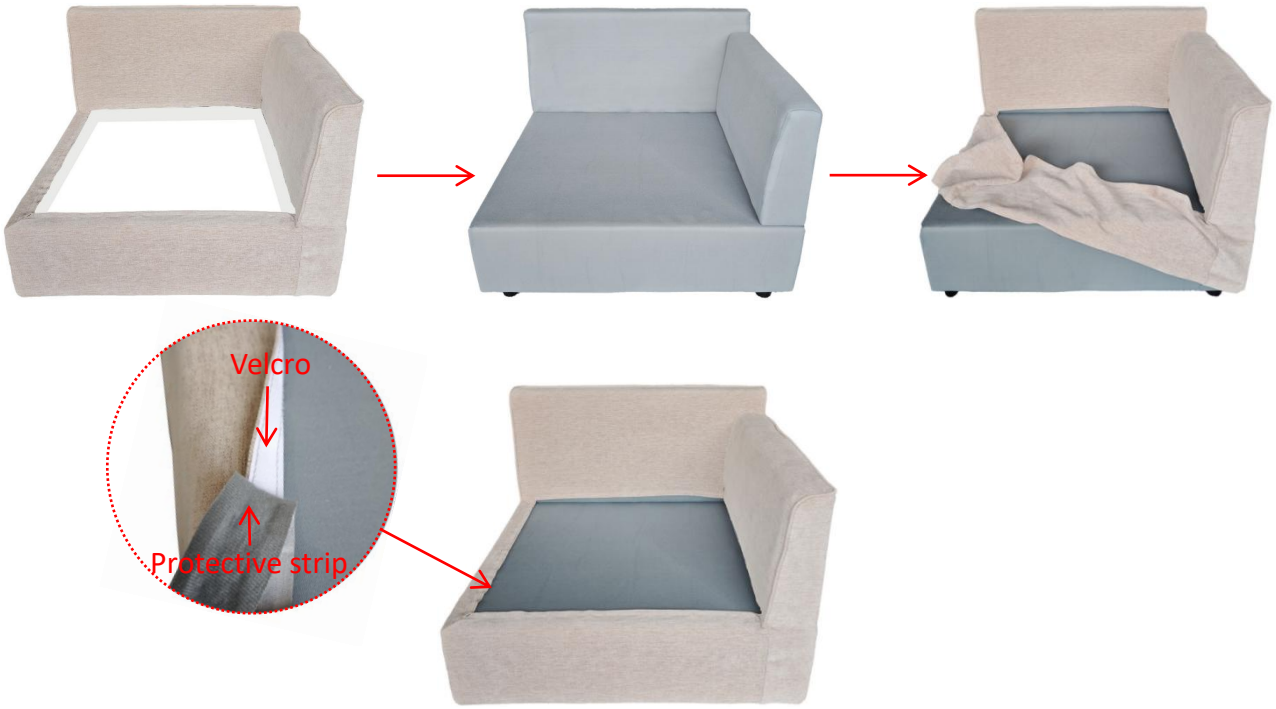

6 Place the seat cushion and back cushion.

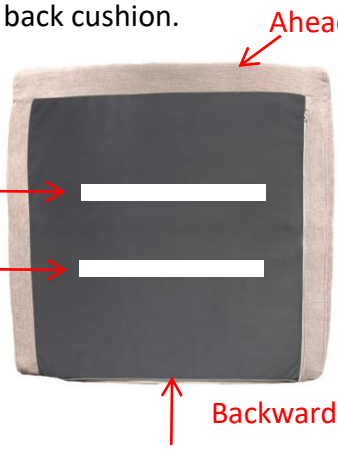

The seat cushion can be attached using Velcro.



Note: The side of the grey magic cloth that is flush with the edge of the seat cushion should be facing backward.