Assembly Instructions

Caution: You must read this before you proceed.


Care & Maintenance

- Do not put hot items directly on furniture surface
- Do not clean furniture with harsh cleansers or polish.
- Do not place furniture under direct sunlight.
- Do not place furniture near heating or cooling vents.
- Do not write on furniture without a padded barrier to protect the surface.
- Do not place furniture outside . For indoor use only .
- Not for commercial use. For residential use only .
- Stains may be removed with mild soap solution and damp cloth.
- Children should not climb or jump on the furniture.

- Dust and pick-up spills using a clean, non-colored, lint-free cloth .





WAITING BENCH

N753P503257




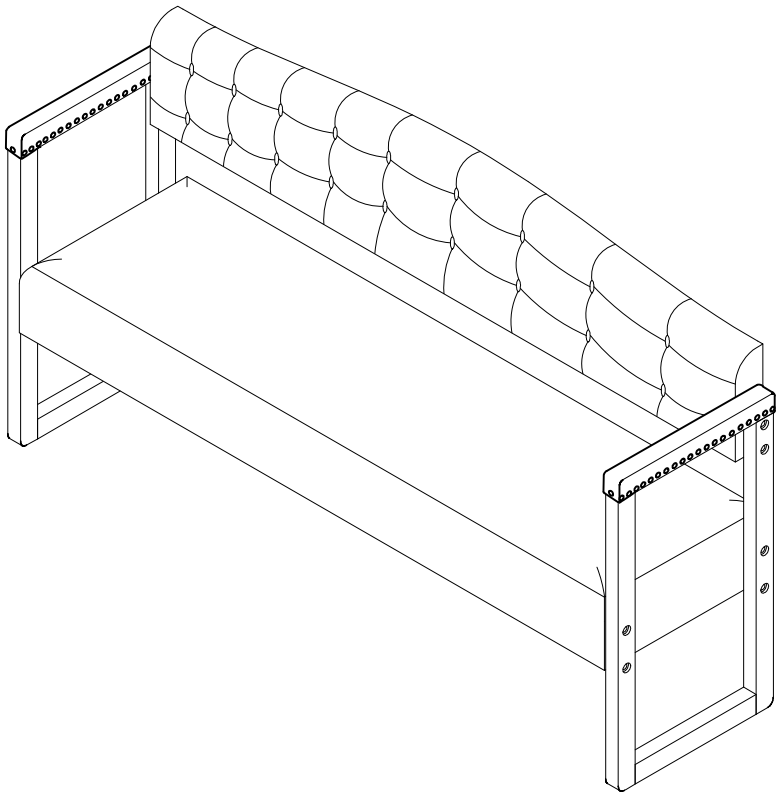


SKU :N753P503257

Parts List For 1 Waiting bench

Label	Picture	Description	QTY
A		Chair Seat	1
B		Chair Back	1
C		Right wooden leg	1
D		Left wooden leg	1


Hardware For 1 Waiting bench

Label	Picture	Description	QTY
1		Bolt 5/16X50	13
2		Flat Washer Ring	13
3		Spring Washer Ring	13
4		Allen Wrench	1


Assembly Preparation

Before Beginning Assembly:


Unpack all the parts for a clear overview

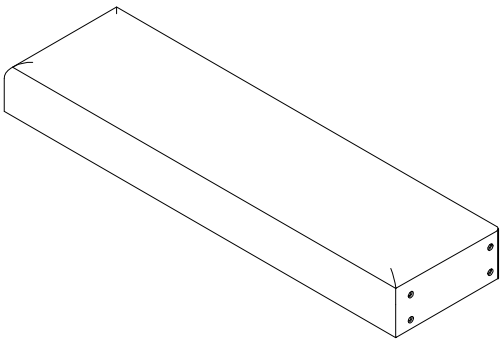


A x1

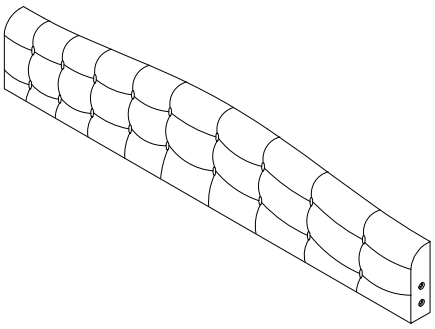


B x1




C x1




D x1




① x13



② x13



③ x13




④ x1

- Read instructions, cover to cover-
- Have 2 adults on hand for assembly-
- Do not assemble on flooring or carpet-
- Assemble on a clean non-marring surface (packing foam)-
- Save all packaging until finished-


Assembly Steps

Parts Introduction

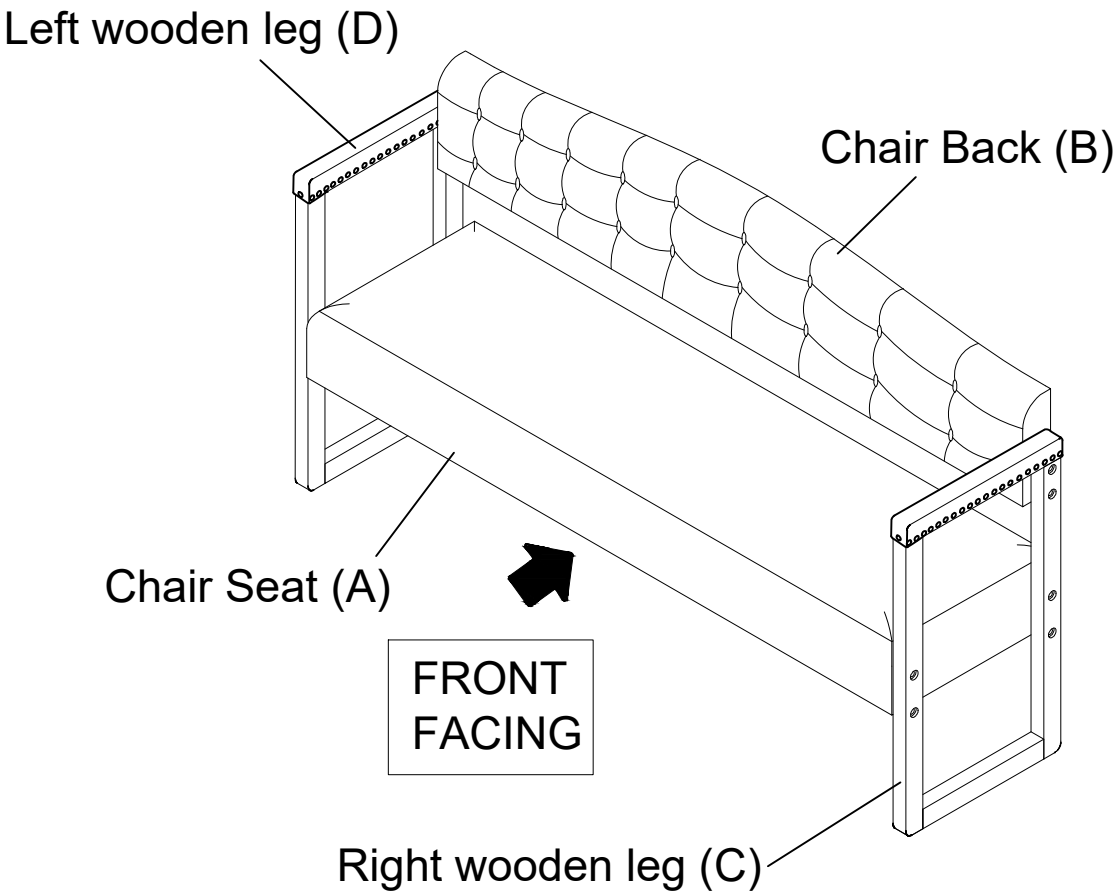


This Push Back Chair has multiple parts and may require up to some 30 minutes to assemble. To give you an overview of the Chair parts, the above picture is to help you put the various parts into perspective. Please read through the instructions below to familiarise yourself with the parts and steps before assembly.

Step 1

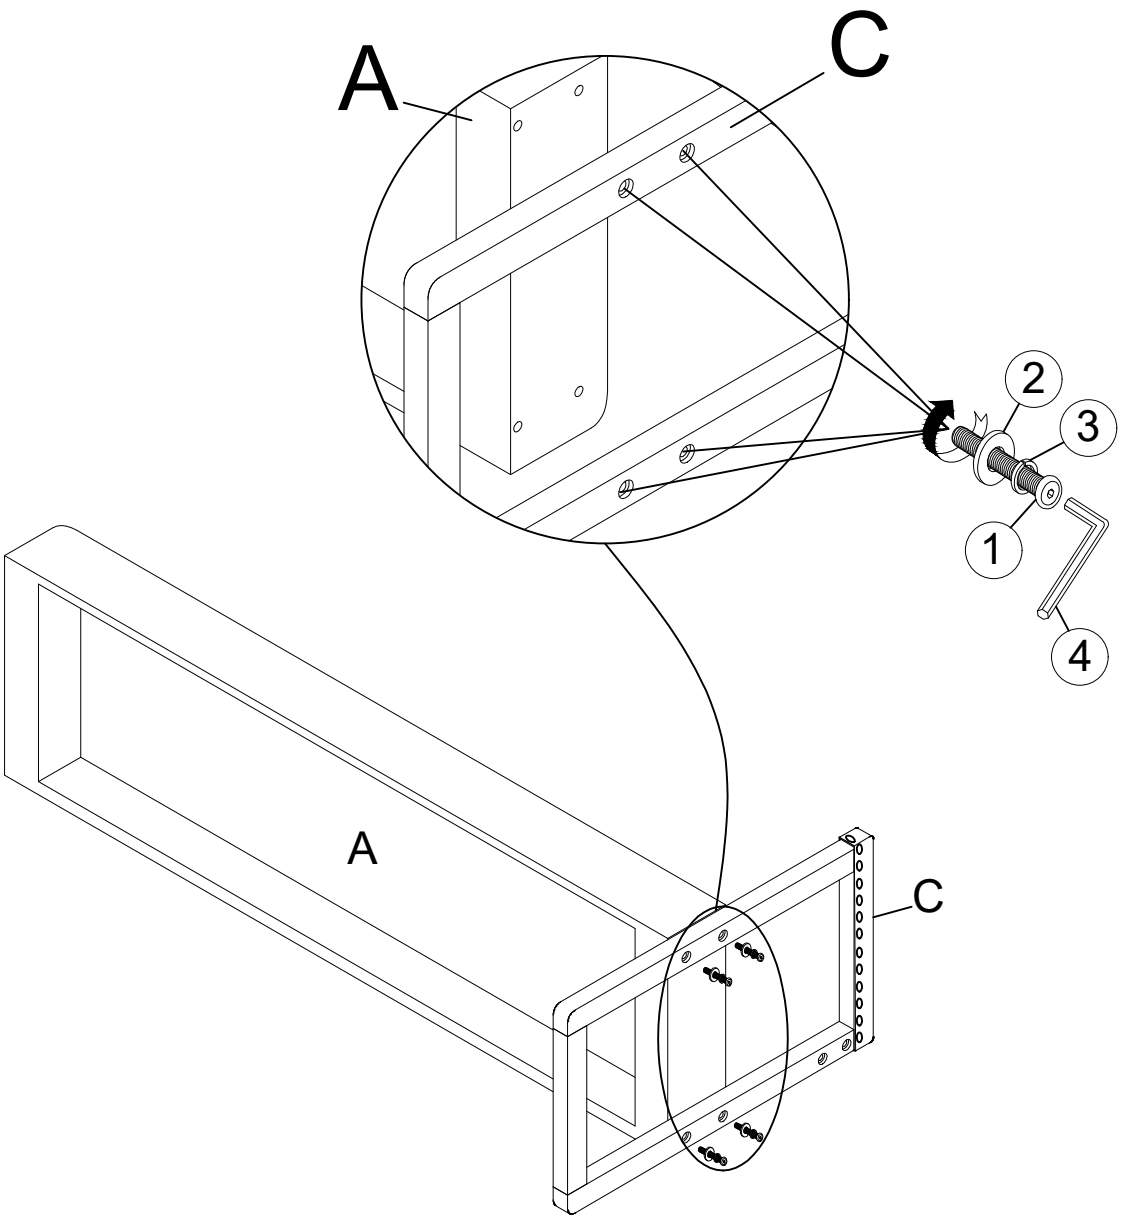


Place the Chair Seat(A) on a flat surface, use the right wooden leg (C) to secure it, and tighten it with bolt (1), flat washer (2) and spring washer (3), Allen Wrench (4).
At this point of assembly, DO NOT overfasten the connections.

Step 2

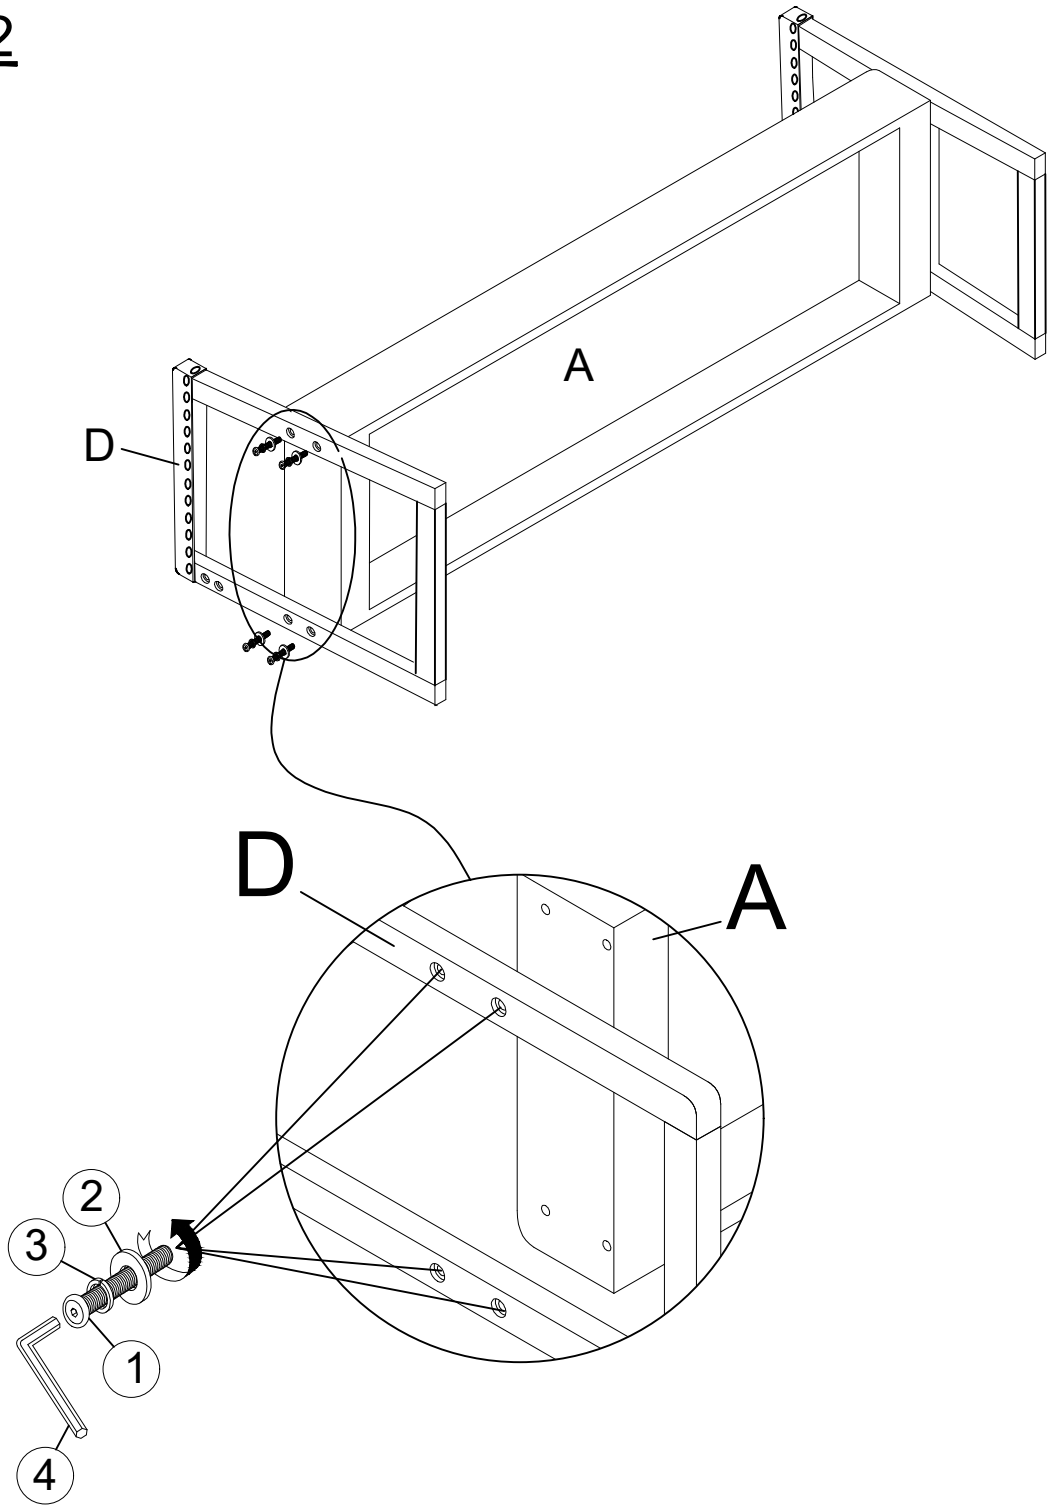


Place the Chair Seat(A) on a flat surface, use the Left wooden leg (D)to secure it, and tighten it with bolt (1), flat washer (2) and spring washer (3), Allen Wrench (4).
At this point of assembly, DO NOT overfasten the connections.

Step 3

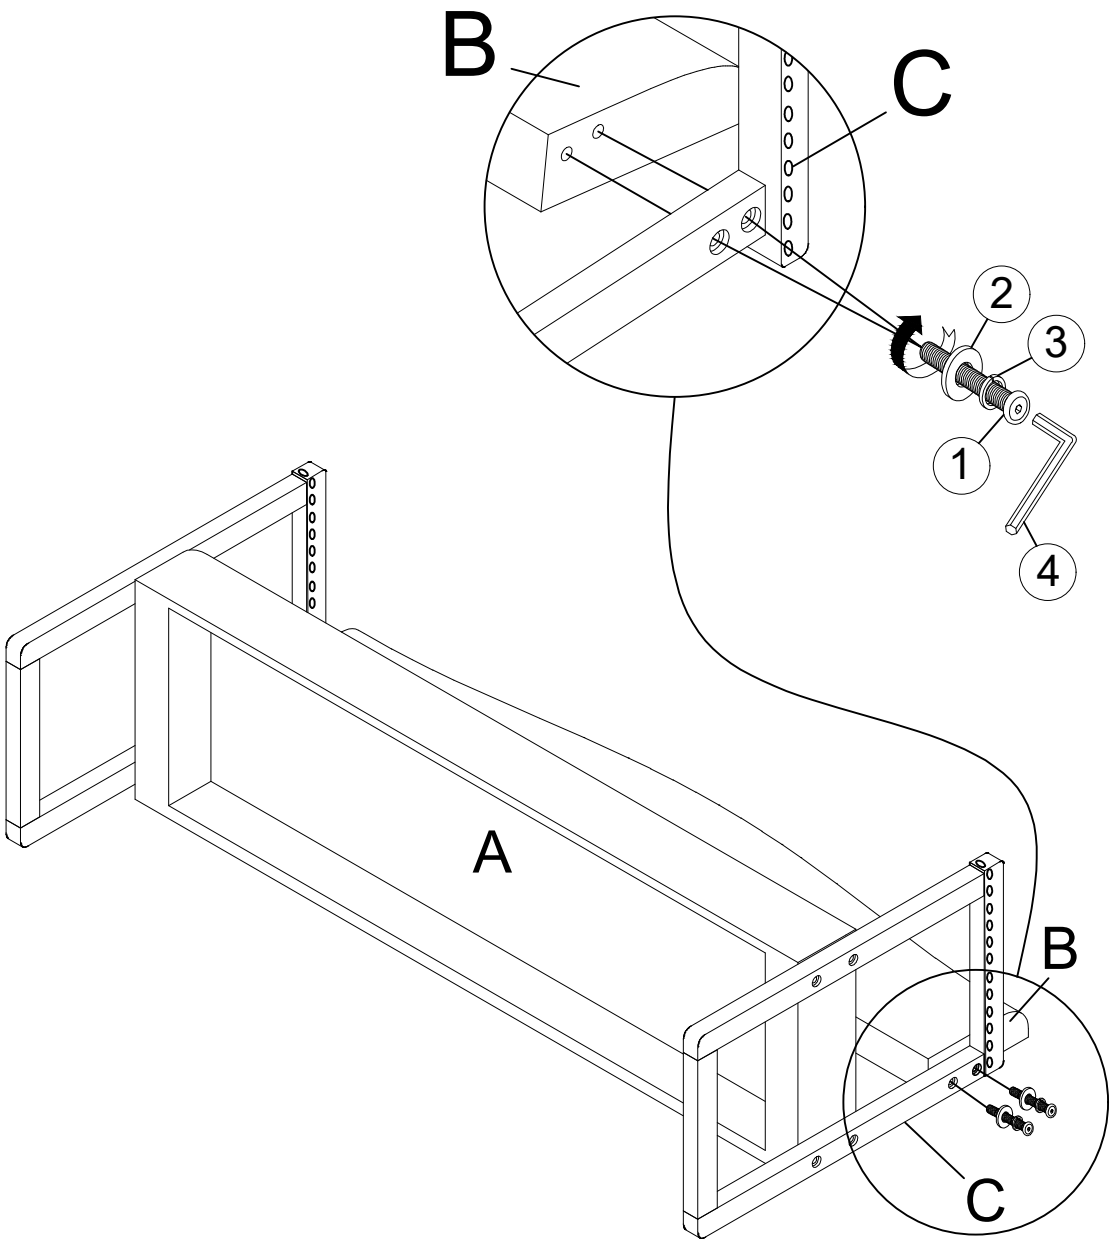

Place the Chair Back (B) into the groove of the right wooden leg (C) and left wooden leg (D) wooden legs as shown in the illustration. To secure and tighten the right wooden leg (C) and Chair Back (B) together, use bolts (1), flat washers (2), spring washers (3), and Allen Wrench (4).
At this point of assembly, DO NOT overfasten the connections.


Step 4

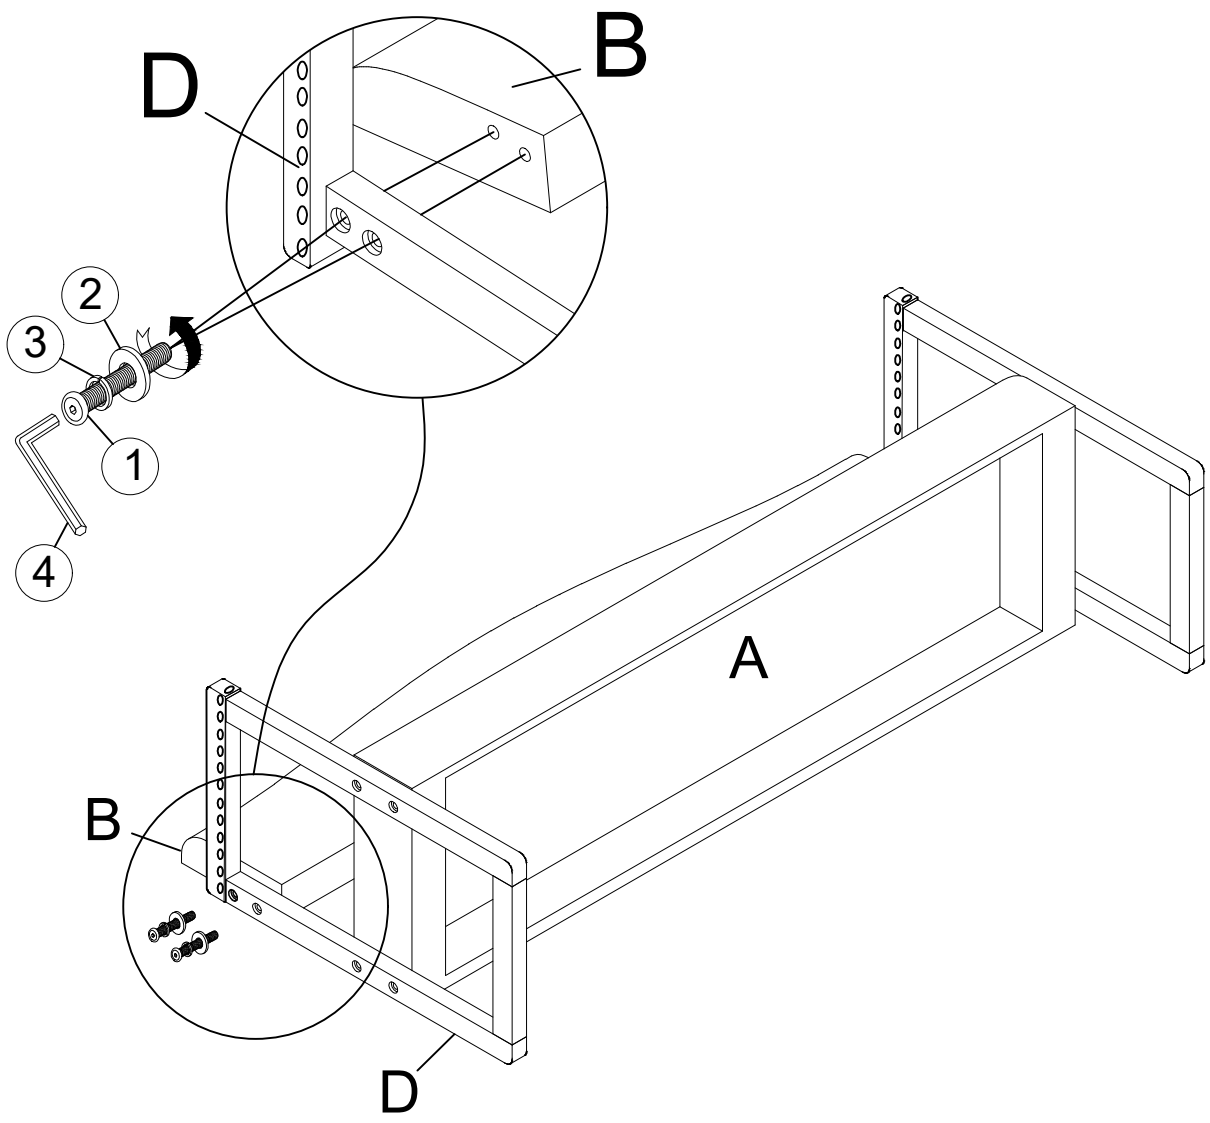

To secure and tighten the Left wooden leg (D) and Chair Back (B) together, use bolts (1), flat washers (2), spring washers (3), and Allen Wrench (4).
Note: In this step, tighten all the bolts to secure the fasteners.

Step 5

Complete

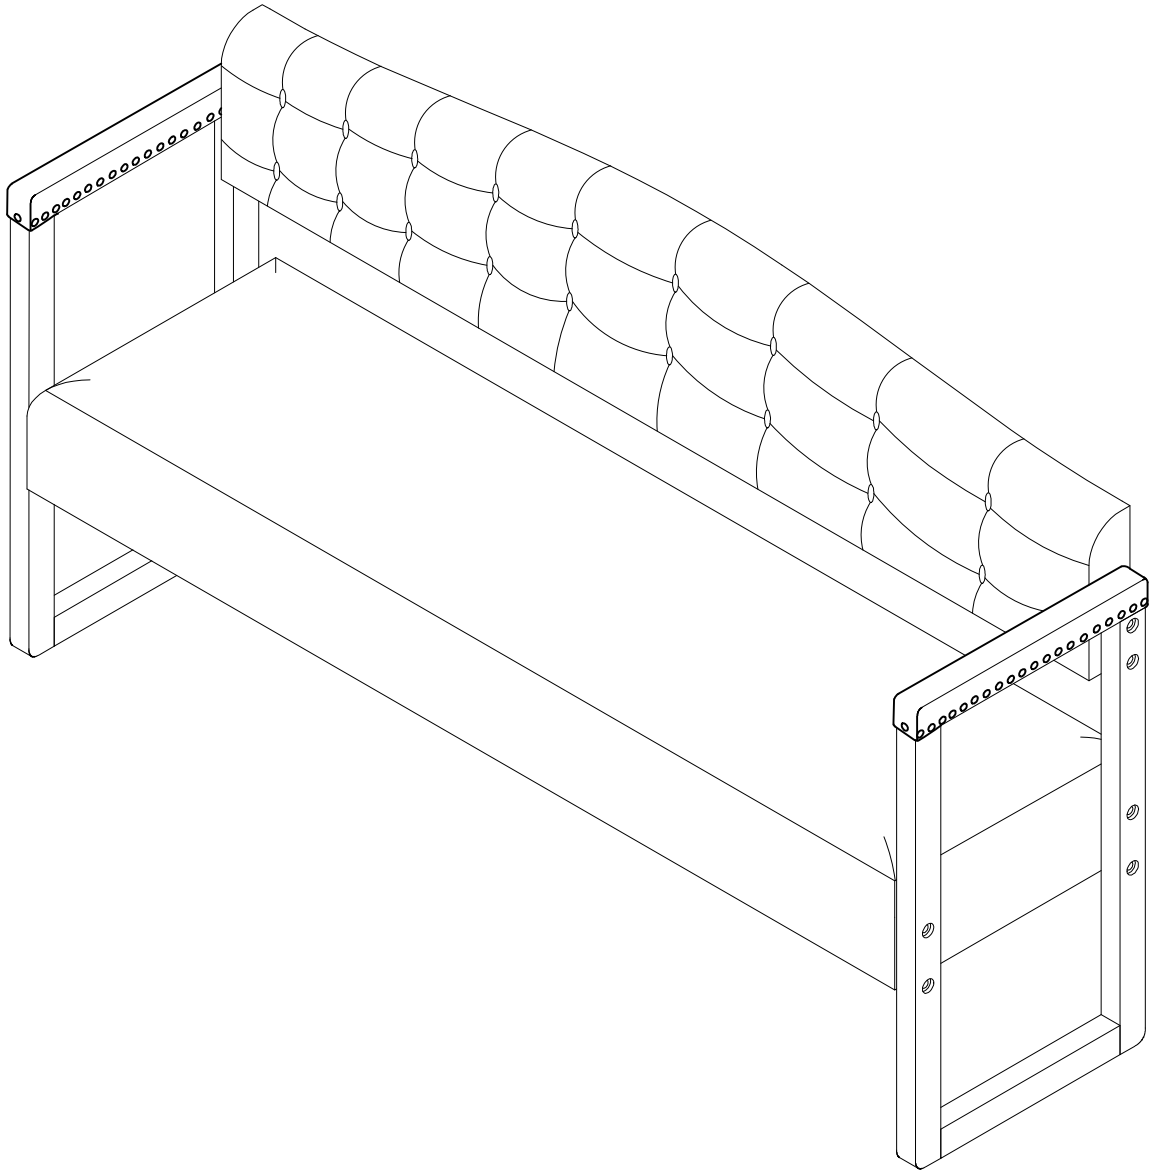

Please note: this Waiting bench can only be used on a flat, level surface.