

ANNWA

User Manual

Handmade Stainless Steel
Undermount Kitchen Sink

Please carefully read this operation manual before the installation operation. This installation method is for reference only. In case of any discrepancies, ANNWA will not assume any liability. It is recommended to hire licensed professionals to install all ANNWA products.

Undermount Installation

Step 1. Prepare the tools and determine the installation method.



Screwdriver




Drill



Silicone Adhesive



Safety Goggles



pencil



Tape Measure





Iron Hammer




Cloth

Confirm the installations

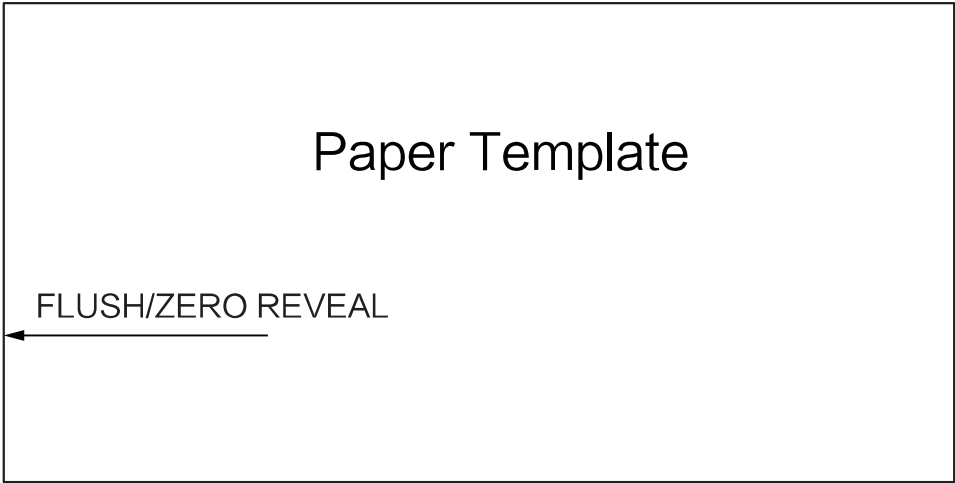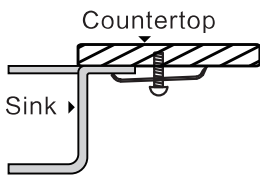


Step 2. Position template

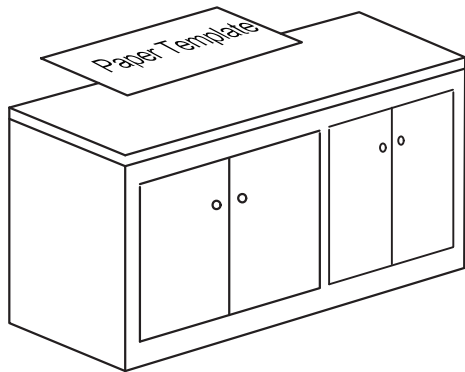


Check if the cutting template matches the sink, ensure the under-counter installation opening size is correct, and place the template on the countertop properly (ensuring no interference with plumbing/faucet installation after sink installation).

Step 3. Trace Template

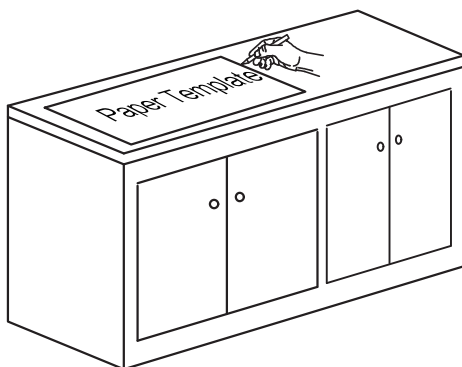



Trace template on countertop with a pencil.

Step 4. Cut countertop

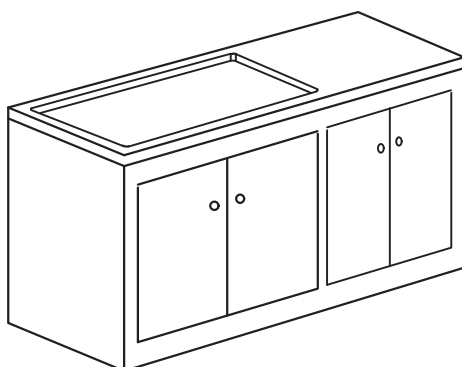

Cut the countertop – Carefully cut the opening on the countertop along the outline.


Step 5. Install the fixing bracket

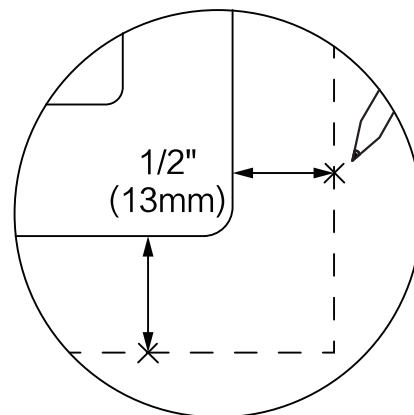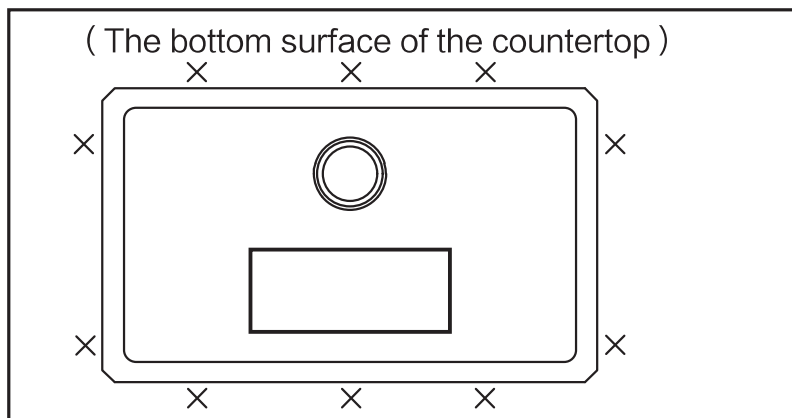

Please turn the countertop over and place the sink upside down, aligning the inner wall edge of the sink with the opening position on the countertop. Locate the opening position of the bracket and mark it with a pencil (the center point of the drilled hole is 1/2 inch away from the outer edge of the sink).


Step 6. Drill hole in countertop

Drill 3/8" diameter x 1/2" deep hole in the countertop.

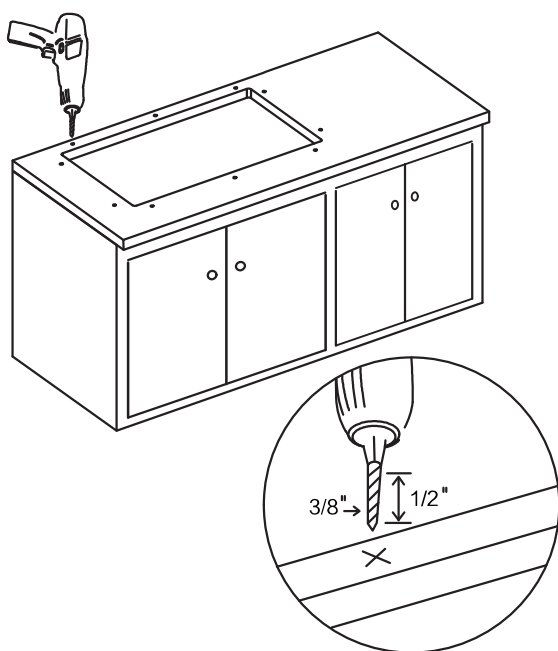


Step 7. Install anchors

Drill a hole with a diameter of 3/8 inch and a depth of 1/2 inch at the marked position on the bottom surface of the countertop.

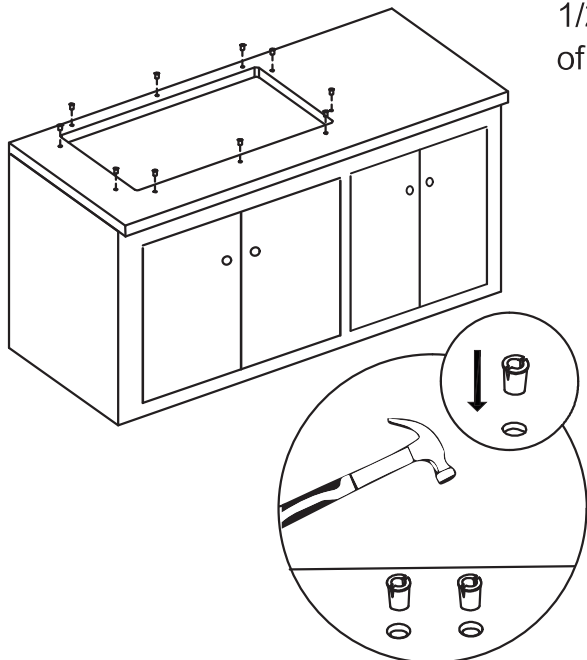


Step 8. Apply silicone sealant.


Apply a continuous even bead of silicone sealant around the entire flat edge of the sink.

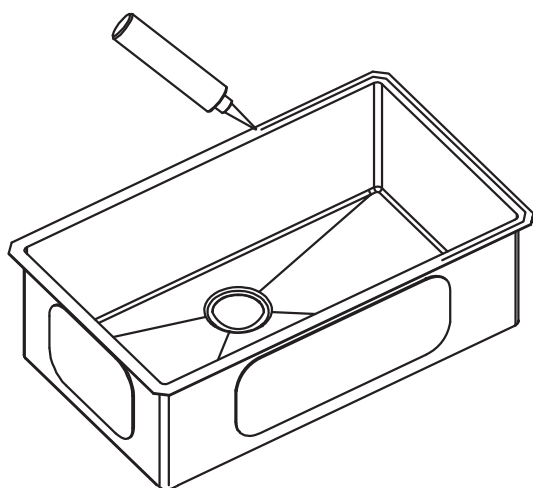

Step 9. Attach mounting hardware

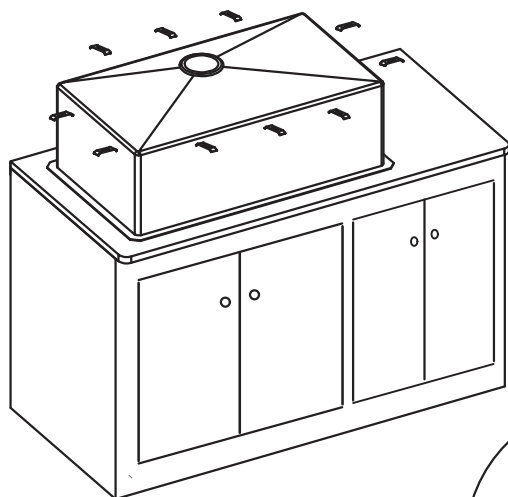


Flip the sink upside down, align its inner wall edge with the countertop opening edge, press firmly, Attach mounting hardware and wipe away excess silicone sealant with a cloth. Let the silicone sealant cure for the recommended time.

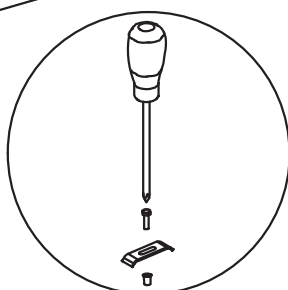

Step 10. Install the drain assembly and conduct a leak test.

Install the drain assembly into the sink and connect the drain tubing. Fill the sink with water and let it sit for 15 minutes to test for leaks. If leakage occurs, adjust the silicone gasket seal on the drain assembly.

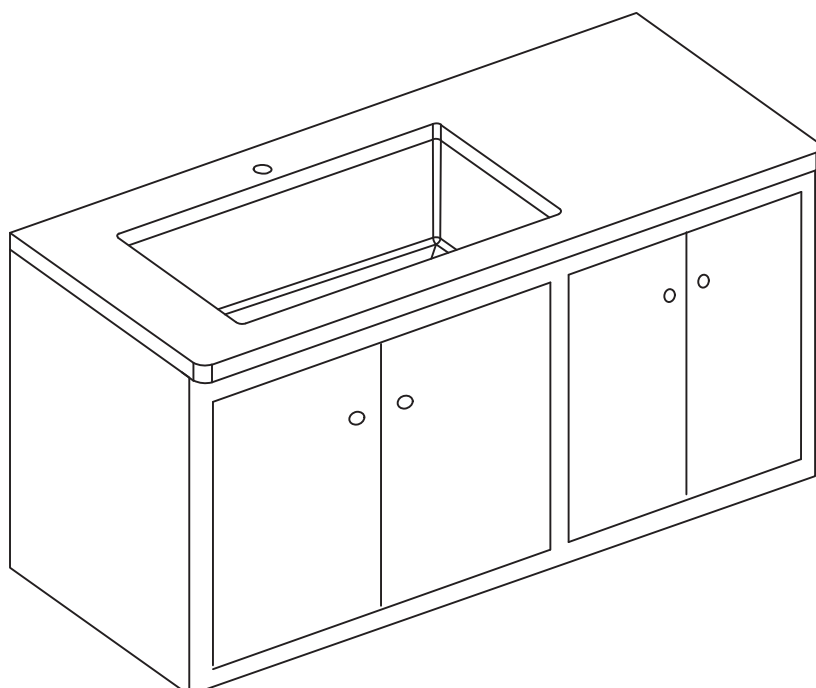

Warranty

Thank you for choosing ANNWA's products. in order to protect your rights and interests, please fully understand the following warranty terms.

1.Service Description

1.1 Warranty service is valid within the warranty period and requires the presentation of purchase records.;

1.2 ANNWA only assumes warranty liability for the original parts when they just leave the factory.ANNWA will not be responsible for any parts installed or modified by users or dealers without permission and any faults arising therefrom;

1.3 The dealer has provided additional services beyond ANNWA's warranty commitment. Please confirm the commitment with the dealer in order to have an access to its additional services,

1.4Warranty service is only for personal use, the warranty of commercial products are invalid; and engineering products are guaranteed according to the warranty period signed in the engineering contract.

2.Under the following conditions,customers will not be entitled to the free warranty.

2.1 Beyond the warranty period (see the third detailed list for the warranty period);

2.2 Failure caused by improper installation, usage and maintenance according to the product manual or use in a service environment that does not comply with the provisions of the product manual;

2.3. Product failure or components damage caused by the use of detergent with coarse particles such as decontamination powder or polishing powder, nylon brush, abrasive cloth or sandpaper;

2.4 .Product failure or components damage caused by improper use of power supply .

2.5. Product failure or components damage caused by force majeure such as natural disasters (including earthquake, fire hazard, etc.) and other accidents (collision, smashing, stepping, etc.).

3. Warranty Conditions

Warranty-covered Parts	Warranty Period
Faucet, thermostatic mixer, stainless steel sink, shower hand, hand shower, aerator.	5 Years
LED lamp, plastic pipe fittings, hand dryer, flexible supply hose, shower hose, drain, bathroom accessories, floor drain angle valve, buttons handsprayer, soap dispenser, hydro-power unit, time delay valve, connecting pipe fittings of drains, etc.	1 Year

4. Service Information

When there is a problem with your ANNWA product, You can contact ANNWA after-sales department with email.

address: annwahelp@annwa.com.cn.

We will provide you with satisfactory service as soon as possible.